

Embedded **POWER**

*AC-DC and DC-DC
Power Conversion Solutions*





Contents

AC–DC Power Supplies

Low Power 3-500 W

- Open frame/enclosed 1-4 outputs 9
- External power adapters 18

Fanless/Conduction Cooled Up to 600 W

- Enclosed / IP64 250 W Series 15
- Enclosed / IP65 600 W Series 17

Healthcare Power Up to 24000 W

- 1-24 outputs 20

Micro Medium Power (μMP) Up to 1800 W

- Up to 12 outputs 25

Medium Power (MP) Up to 1200 W

- 1-10 outputs standard (up to 21 available) 27

Intelligent Medium Power (iMP) Up to 1500 W

- Up to 21 outputs 29

Intelligent High Power (iVS) Up to 4920 W

- Up to 24 outputs 32

Precision High Power System (iHP) Up to 24000 W

- Up to 8 outputs 35

Bulk Power 35-12000 W

- Bulk front end 38
- Distributed power bulk front end 48

Distributed Power (DS) 450-3000 W

- Available 1U, 2U and 3U 51

DIN Rail (ADN & ADNB) 40-960 W

- Single & 3-phase 58

DC–DC Converters

Industry Standard Isolated

- Sixteenth-Brick 63
- Eighth-Brick 64
- Quarter-Brick 66
- Half-Brick 67
- RF Power Brick 67
- Wide Input Voltage 68

Industry Standard Non-Isolated

- C-Class 69
- E-Class 71
- POLA Products 72

High Power 300 V Input

- On-board AC–DC Distributed Architecture 73
- Power Factor Correction (PFC) 74

Low Power Industrial

- Low Power Isolated DC–DC Product 75
- DC–DC Converter for Railway Application 80
- DC–DC Converter for Medical Application 81

Rapid Modification and Value-Added Solutions 82

Terms and Conditions 84

Index 87

Artesyn Embedded Technologies is a global leader in the design and manufacture of highly reliable power conversion solutions for a wide range of industries including communications, computing, medical, aerospace and industrial automation.

Artesyn is one of the world's largest and most successful power supply companies and embraces the well-known Astec brand. The company's extensive standard ac-dc product portfolio covers a power range of 3 watts to 24 kilowatts and includes open-frame and enclosed models, highly configurable modular power supplies, rack-mounting bulk front end units, DIN rail power supplies and external power adapters. Many of these products are available in medically approved versions and a large number of the higher power models feature extensive built-in intelligence.

Widely acknowledged as an industry leader in distributed power applications, Artesyn produces an exceptionally wide range of dc-dc power conversion products. These include isolated dc-dc converters, covering industry-standard sixteenth- to full-brick form factors and power ratings from 6 watts to 800 watts, and three application-optimized families of non-isolated dc-dc converters.

For more than 40 years, customers have trusted Artesyn to help them accelerate time-to-market and shift development efforts to the deployment of new, value-add features and services that build market share.



Local Support

Our regional sales offices are ready to provide expert local applications and sales support. In addition, an extensive network of manufacturers' representatives and distributors bring our products to you. Please call for locations of sales offices near you or visit our website at Artesyn.com/power.

Americas (USA)

Telephone: +1 888 412 7832

Europe (UK)

Telephone: +44 (0) 1384 842 211

Asia (HK)

Telephone: +852 2176 3333

Technical Support

Americas (USA)

+1 888 412 7832 (North America)

Europe, Middle East and Africa (EMEA)

0 800 0321546 (UK)

+44 800 0321546 (outside UK)

Asia

+400 88 99 130 (China)

+86 29 8874 1895 (outside China)

Email:

Americas and EMEA

productsupport.ep@Artesyn.com

Asia

asiaproductsupport.ep@Artesyn.com

Embedded Power Selector Guide

AC-DC

Modular

MP Series

Up to 1200 W
1 - 21 Outputs



iMP Series

Up to 1500 W
1 - 21 Outputs



uMP Series

Up to 1800 W
Up to 12 Outputs



iVS Series

Up to 4920 W
1 - 24 Outputs



iHP Series

Up to 24000 W
Up to 8 Outputs



Bulk/Distributed/Enclosed

LCB Series

35, 50, 100, 150 W
88 - 264 Vac
3.3 - 48 Vdc



LCM Series

300, 600, 1000, 1500 W
85 - 264 Vac
12 - 60 Vdc



UFE Series

1300 - 2000 W
85 - 264 Vac
24, 48 Vdc



DS Series

450 - 3000 W
90 - 264 Vac
12, 24, 48 Vdc



HPS Series


1 - 3000 W
90 - 264 Vac
48 Vdc



DC-DC

PFC

Full Brick (AIF)
3/4 Brick (AIT)
1/4 Brick (AIQ)
PSE1000PFC



Telecom DCDC

1/16th brick 35 - 120 W; ALD/AVD
1/8th brick 50 - 240 W; AVO
1/4 brick 50 - 600 W; AVQ/ADQ
1/2 brick 300 - 600 W; AVE/AGH
Full brick 500 - 800 W; AGF



Industrial DCDC

0.9 by 0.5 DIP 3 W; ATA
1.2 by 0.8 DIP 24 6 W, 10 W; ASA
1 by 1; 10 W, 20 W; AXA
1 by 2; 15 W, 40 W, 50 W; AEE
1.6 by 2; 25 W, 30 W; AET



Racks

UFR

1U, 6 kW
Accepts 3 UFE units



DSR1

1U, 6 kW
Accepts 5 DS units



HPR1

1U, 12 kW
Accepts 4 HPS3000



Adapters

DCH Series

3 W
5 V



DA Series

5 - 12 W
5 V



AD Series

24 W
12 V



DP Series

30 - 100 W
5 - 54 V



Open Frame

NPS20-M

25 - 40 W

NPS40-M

45 - 60 W

NPT40-M

45 - 55 W

LPT50/50-M

47.4 - 55 W

LPS50/50-M

55 - 60 W

NPS60-M

60 W

LPT100-M

80 - 130 W

LPS100-M

100 - 150 W

CPS250-M

150 - 250 W

2x4



LP20

25 - 40 W

LP40/40-M

40 - 55 W

NLP65

65 - 75 W

LP60/60-M

60 - 80 W

TLP150

100 - 150 W

LPQ200-M

100 - 200 W

LPS200-M

125 - 250 W

LPS360-M

200 - 360 W

3x5



LPQ140

80 - 145 W

NLP250

175 - 250 W

NTS350

200 - 350 W

NTS500/500-M

200 - 500 W

4x7



Fanless/Conduction Cooled

LCC250

250 W



4x7

LCC600

600 W



4x9

High Power

Full Brick (AIF)

3/4 Brick (AIT)

1/2 Brick (AIH)

1/4 Brick (AIQ)

PSE 1000 DC-12



Non-Isolated DCDC

C2 Class 3 - 90A LDO, SMT, SIL

LGA package 3 - 20 A LGA

POLA package 6 - 60 A PTH



Medical DCDC

1 by 2; Medical 10 W, 15 W, 20 W; AEE

Railway DCDC

1 by 2; Railway 10 W, 20 W; ERM

1/4 brick Railway 50 W, 75 W; ERM



Special

ADN-C & ADNB-C Series

40 - 960 W

Single & 3-phase

Approved for UL508 &
Hazardous Locations



For more information and a complete overview of Embedded Power products and services go to www.Artesyn.com/power



Accelerate, Improve and Enhance the Capabilities of Your Next System Design.

A History of Innovation

At Artesyn Embedded Technologies, our engineers have been designing and developing power supply products for over 40 years. Our products have helped pave the way for advancements in numerous applications in the communications, industrial, computing, data storage and healthcare markets.

When developing products, time is money. Every step in the process that you can eliminate, speed up, or make more effective accelerates your time-to-market and lowers your R&D costs. Major advantages of partnering with Artesyn include:

- Broadest power supply product lines
- Highly versatile power supplies
- Modified standards and value-add services
- Low energy consumption
- Eco-friendly products
- Space-efficient power
- Reliability & quality
- Worldwide distributor network
- Vast knowledge, experience & expertise

Power for the Next Generation

Many of our products incorporate powerful programming, monitoring and self-testing software providing system engineers with critical data to manage power consumption. High efficiency, green design and manufacturing technologies, and innovative demand and supply replenishment systems collectively deliver key business efficiencies and new design capabilities.

Artesyn can help take your new product design or redevelopment efforts to the next level with a shorter time-to-profit, higher reliability and greater scalability. Artesyn benefits include:

- **Shorter Time-to-Market** – our latest programmable power solutions and our modular, medium/high power μ MP and iMP series provide you with shorter time-to-market and offer faster test and qualification than traditional analog power solutions. Our modified standards and value-add services also provide turn-key solutions for the best application match to help accelerate time-to-market without compromising quality.
- **Higher Reliability** – moving from inflexible fixed-output analog power supplies to programmable power solutions enables our engineers to more extensively test and document our products to ensure they meet or exceed your reliability requirements. And we provide a wide range of on-line environmental, EMC compliance and safety certification to help speed your product design process.
- **Greater Scalability** – many of our latest power solutions are scalable, programmable and plug-compatible with our earlier-generation products, enabling you to quickly address changes or enhancements to your systems. You can now satisfy most changes in power requirements simply by reprogramming the power supply – and if your needs change radically, you can easily swap to a more capable solution. This inherent scalability eliminates redesign costs, reduces testing time and provides you with greater design flexibility.

Artesyn utilizes the following design methodologies and techniques to ensure that our power supplies meet the rigorous quality and reliability requirements of the communications, industrial, computing, data storage and healthcare markets.

Power Supply Design Controls

Reliability Models and Predictions

- A prediction of design reliability in terms of Mean Time Between Failures (MTBF) using Telecordia, Bellcore or MIL-HDBK-217F
- Not intended as a measure of expected field performance, but for design trade-off analysis and review of part stress derating performance

Failure Modes and Effect Analysis

- An analytical technique to identify and review failure modes, their causes, mechanisms and effects
- Provides a formal risk assessment to reduce field failures at the customer site

Component Selection

- Database warehouse of all component information
- Design engineers can only select components rigorously approved from suppliers that have undergone strict qualification and auditing process

Derating Analysis

- Intended to reduce the failure rate of components

Design for Manufacturability

- Design rules regarding manufacturability


Simulation Analysis – Computer-Aided Engineering Tools

- Thermal Simulation
- Circuit Simulation
- EMI Field Simulation
- Detailed Mechanical Design
- PCB Layout and Tracking
- Structural Simulation


Artesyn Computer-Aided Engineering Tools



Thermal Simulation



Circuit Simulation




EMI Field Simulation



Detailed Mechanical Design



PCB Layout and Tracking



Structural Simulation

For additional information go to
www.Artesyn.com/power



AC-DC Power Supplies

Artesyn Embedded Technologies is widely acknowledged as an industry leader and produces an exceptionally wide range of AC-DC power conversion products.

Low Power

Open frame 1-4 outputs

20-500 Watts





Special Features

All models feature:

- Industry standard footprints
- Wide-range AC input
- Full power to 50 °C
- High demonstrated MTBF
- Overvoltage protection
- Overload protection
- Built-in EMI filtering
- Extensive safety approvals
- Derated operation to 70 °C

Many models feature:

- EN61000-3-2 compliance
- Supervisory outputs (5 V/12 V)
- Wide-adjust floating 4th output
- Single wire current share
- Medical approvals
- Remote sense
- Adjustable outputs
- Power fail
- Wide-adjust on single output models
- Derated operation to 80 °C

Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
	25 W	LP20 Series**					
		5 V @ 5 A [8 A]*				3" x 5" x 1.2"	LPS22
		12 V @ 2.1 A [3.3 A]*				(76.2 x 127 x 30.5)	LPS23
		15 V @ 1.7 A [2.7]*					LPS24
		24 V @ 1.1 A [1.8 A]*					LPS25
		5 V @ 3 A [4 A]	12 V @ 1.5 A [2 A]	-12 V @ 0.5 A [0.7 A]			LPT22
		5 V @ 4 A [5 A]	12 V @ 0.5 A [0.7 A]	-12 V @ 0.5 A [0.7 A]			LPT23
		5 V @ 3 A [4 A]	12 V @ 1.5 A [2 A]	-5 V @ 0.5 A [0.7 A]			LPT24
		5 V @ 3 A [4 A]	15 V @ 1.5 A [2 A]	-15 V @ 0.5 A [0.7 A]			LPT25
			25 W	NPS20-M Series**			
5 V @ 5 A [8 A]*				2" x 4" x 1"	NPS22-M		
12 V @ 2.1 A [3.3 A]*				(50.8 x 101.6 x 25.4)	NPS23-M		
15 V @ 1.7 A [2.7 A]*					NPS24-M		
24 V @ 1 A [1.8 A]*					NPS25-M		
48 V @ 0.5 A [0.84 A]*					NPS28-M		

Options:

[] Rating with 30 CFM of air

(1) Optional cover/enclosure

* Floating output

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[50 W]	40 W	NLP40 Series**					
 (1)		3.3 V @ 9 A*				2.5" x 4.25" x 1.15"	NLP40-76S3J
		12 V @ 4 A*				(63.5 x 108 x 29.2)	NLP40-7612J
		5 V @ 9 A*					NLP40-7605J
		12 V @ 4 A*					NLP40-7612J
		15 V @ 3.3 A*					NLP40-7615J
		24 V @ 2 A*					NLP40-7624J
		48 V @ 1 A*					NLP40-7617J
		5 V @ 4.5 A	12 V @ 3 A				NLP40-7629J
		12 V @ 2.1 A	-12 V @ 2.1 A				NLP40-7627J
		3.3 V @ 4.5 A	12 V @ 3 A	-12 V @ 0.5 A			NLP40-76T366J
		5 V @ 4.5 A	12 V @ 3 A	-12 V @ 0.5 A			NLP40-7608J
		5 V @ 4.5 A	15 V @ 2 A	-15 V @ 0.5 A			NLP40-7610J
	[55 W]	40 W	LP40 Series**				
 (1)		3.3 V @ 8 A [11 A]*				3" x 5" x 1.2"	LPS41
		5 V @ 8 A [11 A]*				(76.2 x 127 x 30.5)	LPS42
		12 V @ 3.3 A [4.5 A]*					LPS43
		15 V @ 2.6 A [3.6 A]*					LPS44
		24 V @ 1.6 A [2.3 A]*					LPS45
		48 V @ 0.9 A [1.2 A]*					LPS48
		3.3 V @ 4 A [7 A]	5 V @ 1.5 A [2 A]	+12 V @ 0.5 A [0.7 A]			LPT41
		5 V @ 4 A [5 A]	12 V @ 2 A [2.5 A]	-12 V @ 0.5 A [0.7 A]			LPT42
		5 V @ 6 A [8 A]	12 V @ 0.5 A [0.7 A]	-12 V @ 0.5 A [0.7 A]			LPT43
		5 V @ 4 A [5 A]	12 V @ 2 A [2.5 A]	-5 V @ 0.5 A [0.7 A]			LPT44
		5 V @ 4 A [5 A]	15 V @ 2 A [2.5 A]	-15 V @ 0.5 A [0.7 A]			LPT45
		5 V @ 4 A [5 A]	24 V @ 1 A [1.5 A]	+12 V @ 0.5 A [0.7 A]			LPT46
		5 V @ 4 A [5 A]	24 V @ 1 A [1.5 A]	-12 V @ 0.5 A [0.7 A]			LPT47
	[55 W]	45 W	NPT40-M Series**				
	 (1)		5 V @ 5 A [8 A]	12 V @ 2.5 A [3 A]	-12 V @ 0.5 A [0.7 A]	2" x 4" x 1"	NPT42-M
		5 V @ 5 A [8 A]	15 V @ 2 A [2.4 A]	-15 V @ 0.5 A [0.7 A]	(50.8 x101.6 x 25.4)	NPT43-M	
		5 V @ 5 A [8 A]	24 V @ 1 A [1.5 A]	12 V @ 0.5 A [0.7 A]		NPT44-M	
[60 W]	45 W	NPS40-M Series**					
 (1)		5 V @ 8 A [11 A]*				2" x 4" x 1"	NPS42-M
		12 V @ 3.75 A [5 A]*				(50.8 x101.6 x 25.4)	NPS43-M
		15 V @ 3 A [4 A]*					NPS44-M
		24 V @ 1.9 A [2.5 A]*					NPS45-M
		48 V @ 0.94 A [1.25 A]*					NPS48-M
[55 W]	55 W	LP50 Series**					
 (1)		3.3 V @ 8 A	5 V @ 3 A	12 V @ 0.5 A	2" x 4" x 1.3"	LPT51	
		5 V @ 8 A	12 V @ 3 A	-12 V @ 0.5 A	(50.8 x 101.6 x 33)	LPT52	
		5 V @ 8 A	15 V @ 2.4 A	-15 V @ 0.5 A		LPT53	
		5 V @ 8 A	24 V @ 1.5 A	12 V @ 0.5 A		LPT54	
[60 W]	60 W	5 V @ 11 A*					LPS52
		5 V @ 11 A*					LPS52 (-I)
		12 V @ 5 A*					LPS53
		12 V @ 5 A*					LPS53 (-I)
		15 V @ 4 A*					LPS54
		24 V @ 2.5 A*					LPS55
		48 V @ 1.25 A*					LPS58

Options:

[] Rating with 30 CFM of air

(1) Optional cover/enclosure

* Floating output

(-I) Industrial version -40 °C up to 80 °C (derated)

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

Output Power		Output			Size W x L x H (mm)	Model	
[Forced Air]	Free Air	V1	V2	V3			V4
 (1)	60 W	NPS60-M Series**					
		5 V @ 11 A*				2" x 4" x 1"	NPS62-M
		12 V @ 5 A*				(50.8 x 101.6 x 25.4)	NPS63-M
		15 V @ 4 A*					NPS64-M
		24 V @ 2.5 A*					NPS65-M
 (1)	65 W	NLP65 Series**					
		5 V @ 12 A*				3" x 5" x 1.26"	NLP65-7605J
		5 V @ 12 A*				(76.2 x 127 x 32)	NLP65-9605J ^{(5)(G)}
		12 V @ 6.5 A*					NLP65-7612J ^(G)
		12 V @ 6.5 A*					NLP65-9612J ^{(5)(G)}
		24 V @ 3.5 A*					NLP65-7624J ^(G)
		24 V @ 3.5 A*					NLP65-9624J ^{(5)(G)}
		5 V @ 8 A	12 V @ 3 A				NLP65-7629J
		5 V @ 8 A	12 V @ 3 A				NLP65-9629J ^{(5)(G)}
		5 V @ 8 A	24 V @ 2 A	+12 V @ 1.0 A			NLP65-3322J
		5 V @ 8 A	12 V @ 3 A	-12 V @ 0.8 A			NLP65-7608J ^(G)
		5 V @ 8 A	12 V @ 3 A	-12 V @ 0.8 A			NLP65-9608J ^{(5)(E,G)}
		5 V @ 8 A	15 V @ 2.5 A	-15 V @ 0.8 A			NLP65-7610GJ
		5 V @ 8 A	15 V @ 2.5 A	-15 V @ 0.8 A			NLP65-9610J ^{(5)(G)}
		5 V @ 8 A	24 V @ 2 A				NLP65-7620J
		5 V @ 8 A	24 V @ 2 A				NLP65-9620J ^{(5)(G)}
	60 W	LP60 Series**					
		3.3 V @ 12 A [16 A]*				3" x 5" x 1.65"	LPS61
		5 V @ 12 A [16 A]*				(76.2 x 127 x 41.9)	LPS62
		12 V @ 5 A [6.7 A]*					LPS63
		15 V @ 4 A [5.3 A]*					LPS64
		24 V @ 2.5 A [3.3 A]*					LPS65
		48 V @ 1.3 A [1.7 A]*					LPS68
		3.3 V @ 5 A [8.5 A]	5 V @ 2.5 A [3 A]	+12 V @ 0.5 A [1 A]			LPT61
		5 V @ 7 A [8 A]	12 V @ 3 A [3.5 A]	-12 V @ 0.7 A [1 A]			LPT62
		5 V @ 7 A [8 A]	15 V @ 2.8 A [3.3 A]	-15 V @ 0.7 A [1 A]			LPT63
		5 V @ 7 A [8 A]	12 V @ 3 A [3.5 A]	-5 V @ 0.7 A [1 A]			LPT64
		5 V @ 7 A [8 A]	24 V @ 1.5 A [2 A]	+12 V @ 0.7 A [1 A]			LPT65

Options:

(E) To order an enclosed version of the NLP65-9608J, add suffix 'EJ' to the end of the model number, e.g., NLP65-9608EJ. The enclosed version includes: IEC connector, on/off switch, wire harness output connector and fitted cover.

(G) A safety earth ground pin and ground choke are available as an option. To order, please add the suffix 'GJ' to the end of the model number e.g. NLP65-9612GJ.

[] Rating with 30 CFM of air

(1) Optional cover/enclosure

(5) These modules feature harmonic current correction to EN61000-3-2

* Floating output

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[130 W]  (1)	80 W	LPT100-M Series**					
		3.3 V @ 13 A [18 A]	5 V @ 5 A [9 A]	12 V @ 1 A [2.3 A]		2" x 4" x 1.28"	LPT101-M
		5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	-12 V @ 1 A [2 A]		(50.8 x 101.6 x 32.7)	LPT102-M
		5 V @ 13 A [18 A]	15 V @ 4 A [7.2 A]	-15 V @ 1 A [1.5 A]			LPT103-M
		5 V @ 13 A [18 A]	24 V @ 1.5A [3 A]	12 V @ 1 A [2.3 A]			LPT104-M
[145 W]  (1)	80 W	LP140 Series**					
		5 V @ 12 A [25 A] (3.3-5 V)	12 V @ 5 A [6 A]	-12 V @ 1 A [1.5 A] (-12-15 V)	±3.3-25 V @ 1.5 A [4.5 A]*	4" x 7" x 1.5" (101.6 x 177.8 x 38.1)	LPQ142
[150 W]  (1)	100 W	TLP150 Series**					
		12 V @ 12.5 A*				3" x 5" x 1.25"	TLP150R-96S12J ^(F)
		24 V @ 6.3 A*				(76.2 x 127 x 31.75)	TLP150R-96S24J ^(F)
		36 V @ 4.2 A*					TLP150R-96S36J
		48 V @ 3.2 A*					TLP150R-96S48J ^(F)
[150 W]  (1)	100 W	LPS100-M Series**					
		5 V @ 16 A [24 A]*				2" x 4" x 1.29"	LPS102-M
		12 V @ 8.3 A [12.5 A]*				(50.8 x 101.6 x 33)	LPS103-M
		15 V @ 6.7 A [10 A]*					LPS104-M
		24 V @ 4.2 A [6.3 A]*					LPS105-M
		48 V @ 2.1 A [3.1 A]*					LPS108-M
		54 V @ 1.85 A [2.8 A]*					LPS109-M
[175 W]  (1)	110 W	LP170 Series**					
		5 V @ 22 A [35 A]* (2.5-6 V)				4.25" x 8.5" x 1.5" (108 x 215.9 x 38.1)	LPS172
		12 V @ 9.1 A [15 A]* (6-12 V)					LPS173
		15 V @ 7.3 A [12 A]* (12-24 V)					LPS174
		24 V @ 4.5 A [7.5 A]* (24-54 V)					LPS175
		5 V @ 15 A [30 A] (3.3-5.5 V)	12 V @ 6 A [8 A]	-12 V @ 0.2 A [3 A] (-12-15 V)	±3.3-25 V @ 2 A [5 A]*		LPQ172
		5 V @ 10 A [24 A] (3.3-5.5 V)	12 V @ 6 A [8 A]	-12 V @ 1.2 A [3 A] (-12-15 V)	5 V @ 10 A [24 A]* (3.3-5 V)		LPQ173



Options:

[] Rating with 30 CFM of air

(1) Optional cover/enclosure

* Floating output

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
LPQ200-M Series**							
	(1)	3.3 V @ 13 A [18 A]	5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	-12 V @ 1 A [2 A]	3" x 5" x 1.32"	LPQ201-M
		5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	24 V @ 1.5 A [3 A]	-12 V @ 1 A [2 A]	(76.2 x 127 x 33.6)	LPQ202-M
LPS200-M Series**							
	(1)	5 V @ 20 A [40 A]*				3" x 5" x 1.32"	LPS202-M
		12 V @ 10.3 A [20.8 A]*				(76.2 x 127 x 33.6)	LPS203-M
		15 V @ 8.3 A [16.6 A]*					LPS204-M
		24 V @ 5.2 A [10.4 A]*					LPS205-M
		48 V @ 2.6 A [5.2 A]*					LPS208-M


Options:

[] Rating with 30 CFM of air

(1) Optional cover/enclosure

* Floating output

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

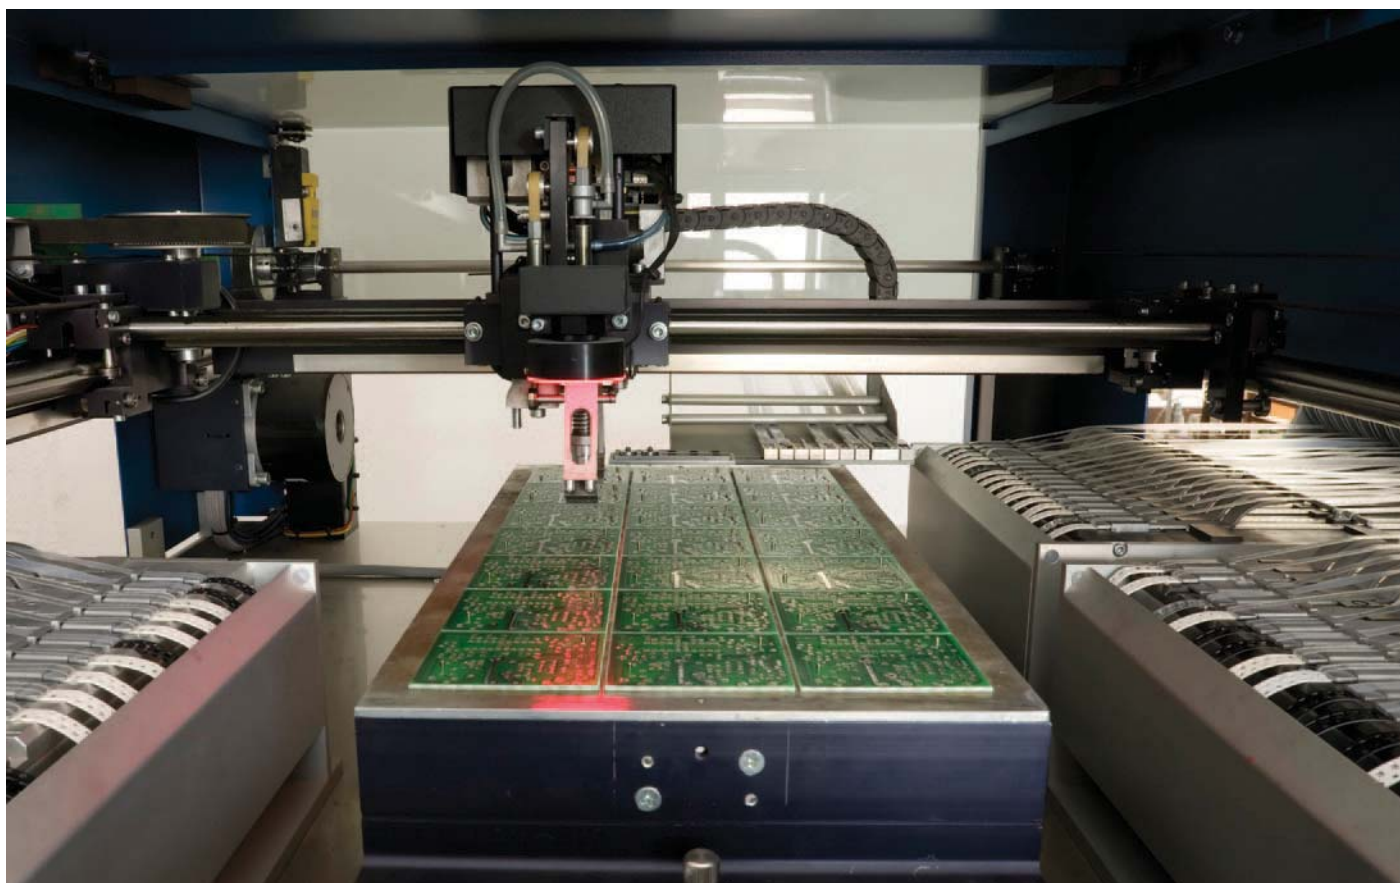

Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[250 W]	150 W	CPS250-M Series**					
	NEW!	12 V @ 12.92 A [20.83 A]				2" x 4" x 1.3"	CPS253-M
		24 V @ 6.45 A [10.42 A]				(50.8 x 101.6 x 32.8)	CPS255-M
		36 V @ 4.16 A [6.94 A]					CPS256-M
		48 V @ 3.23 A [5.21 A]					CPS258-M
[250 W]	175 W	NLP250 Series**					
	(1)	12 V @ 21 A*				4" x 7" x 1.5"	NLP250R-96S12J
		24 V @ 10.5 A*				(101.6 x 177.8 x 38.1)	NLP250R-96S24J
		48 V @ 5.3 A*					NLP250R-96S48J
		NLP250 – DC (-48 Vdc Input)**					
		12 V @ 14.6 A [21 A]				4" x 7" x 1.5" (101.6 x 177.8 x 38.1)	NLP250N-48S12J
[250 W]		LP250 Series**					
	(3), (4)	5 V (3-6 V) @ [50 A]*				5" x 9" x 2"	LPS252-C
		12 V (6-12 V) @ [21 A]*				(127 x 228.6 x 50.8)	LPS253-C
		15 V (12-24 V) @ [16.7 A]*					LPS254-C
		24 V (24-48 V) @ [10.4 A]*					LPS255-C
		5 V @ [35 A]	12 V @ [10 A]	-12 V @ [6 A]	±5-25 V @ [6 A]*		LPQ252-C
		5 V @ [35 A]	15 V @ [10 A]	-15 V @ [6 A]	±5-25 V @ [6 A]*		LPQ253-C
[350 W]		LP350 Series**					
	(3), (4)	5 V (3-6 V) @ [70 A]*				5" x 9" x 2.5"	LPS352-C
		12 V (6-12 V) @ [29.2 A]*				(127 x 228.6 x 63.5)	LPS353-C
		15 V (12-24 V) @ [23.3 A]*					LPS354-C
		24 V (24-48 V) @ [14.6 A]*					LPS355-C
		5 V @ [50 A]	12 V @ [12 A]	-12 V @ [6 A]	±3.3-24 V @ [6 A]*		LPQ352-C
		5 V @ [50 A]	15 V @ [12 A]	-15 V @ [6 A]	±3.3-24 V @ [6 A]*		LPQ353-C
[360 W]	240 W	LPS360-M Series**					
	NEW!	12 V @ 20 A [30 A]*				3" x 5" x 1.3"	LPS363-M
		15 V @ 16 A [24 A]*				(76.2 x 127 x 33)	LPS364-M
		24 V @ 10 A [15 A]*					LPS365-M
		36 V @ 6.25 A [11.25 A]*					LPS366-M
		48 V @ 5 A [7.5 A]*					LPS368-M
[350 W]	200 W	NTS350 Series**					
	(3), (4)	12 V @ 16.6 A [29.2 A]*				4" x 7" x 1.5"	NTS353
		24 V @ 8.3 A [14.6 A]*				(101.6 x 177.8 x 38)	NTS355
		48 V @ 4.2 A [7.3 A]*					NTS358
		54 V @ 3.7 A [6.5 A]*					NTS359
[500 W]	200 W	NTS500 Series**					
	(3), (4)	12 V @ 16.6 A [41.7 A]*				4" x 7" x 1.5"	NTS503
		24 V @ 8.3 A [20.8 A]*				(101.6 x 177.8 x 38)	NTS505
		18 V @ 11.1 A [27.7A]*					NTS506
		48 V @ 4.2 A [10.4 A]*					NTS508

Options:

- [] Rating with 30 CFM of air
 (1) Optional cover/enclosure
 (3) Optional top fan cover (see datasheet for increased dimensions)
 (4) Optional end fan cover (see datasheet for increased dimensions)
 * Floating output

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

LCC250

Convection/conduction
mounting

250 Watts

Total Power: 250 Watts
of Outputs: Single
Output: 12 V, 24 V, 48 V




Special Features

- Wide operating temperature range suited for both outdoor and indoor applications
- 250 W fanless power supply with zero derating up to 85 °C baseplate
- IP64 rated enclosure
- Conduction or convection mounting
- Differential remote sense
- Output adjust
- Output On/Off (Positive or negative logic user selectable)

Electrical Specifications

Input	
Input range	90-264 Vac (Operating) 115/230 Vac (Nominal)
Frequency	47-63 Hz
Input fusing	Internal fuse on both L and N lines
Inrush current	50 A
Power factor	> 0.92 full load
Harmonics	Meets EN61000-3-2; MIL-STD-461E: CE101; CE102 ⁴ ; CS101; CS104
Input current	3.4 A @ 90 Vac full load
Hold up time	16 ms minimum at 115 Vac; 100% load
Efficiency	230 Vac; 100% load 12 V - 89% typical 24 V - 91% typical 48 V - 91.5% typical
Leakage current	< 275 µA at 230 Vac

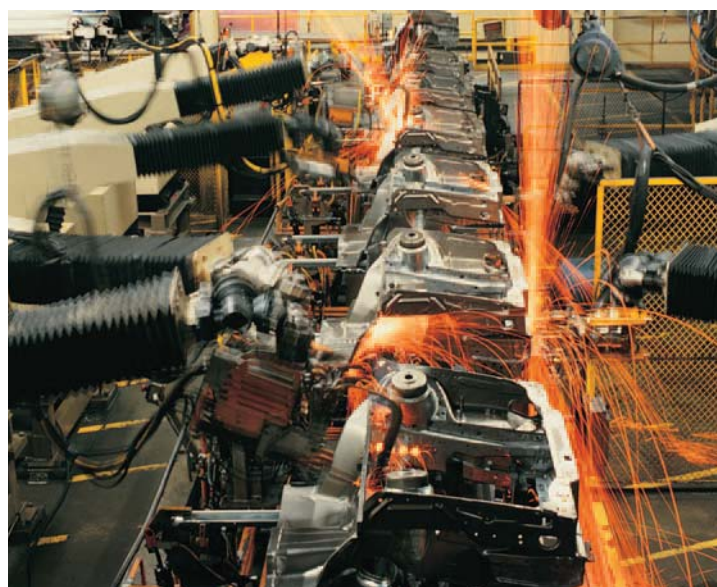

Environmental Specifications

Operating temperature	Suffix 4P (conduction): -40 °C to +85 °C baseplate temperature Suffix 7P (convection): -40 °C to +85 °C ambient temperature
Storage temperature	-40 °C to 85 °C
Humidity	10% to 100% (condensing & non-condensing)
Altitude	Operating: 13,000 feet Non-operating: 50,000 feet
Shock	IEC 68-2-27
Vibration	IEC 68-2-6 / IEC 721-3-2
Ingress protection	IP64 rated
MTBF (calculated)	> 780,000 hours at 100% load; Low line; Telcordia SR332

Compliance

EMI Class B
EN61000 Immunity

Safety

UL + CSA	60950-1 ANSI ES60601-1 3rd Ed.
TÜV	60950-1 60601-1 61347-1; 2-13
China	CCC ³
CB Scheme	IEC 60950-1 IEC 61347-1; 2-13 IEC 60601-1

Electrical Specifications

Output		
Output rating	12 V @ 20.83 A 24 V @ 10.4 A 48 V @ 5.2 A	—
Set point	±0.2%	Factory set point
Total regulation range	±2%	Line/load/temperature
Rated load	250 W maximum	—
Minimum load	0 A Load	No loss of regulation
Capacitive load	0-330 μ F/amp	—
Constant output voltage adjustment range	12 V: +10/-10% 24 V: +14.6/-15% 48 V: +15%/-15%	Adjust via VR2
Constant output current adjustment range	+0/-50%	Adjust via VR1 CC mode supported from Vo nominal down to 80% Vo
Output ripple and noise	1%	See Note 1
Transient response	±5% Vo max transient; recovery < 500 μ s max	50% load step @ 1 A/ μ s Step load verified at: 50% to 100% load; 90-264 Vac input; capacitive load from 0 to 330 μ F/Amp
Remote sense	Capable of stable offset of ±0.5 Vdc at output cable termination	+SENSE (red wire); -SENSE (black wire)
Output On/Off	Remote on/off referenced to secondary side. Positive or negative logic user selectable via CN2. Factory default is positive logic.	On/off (orange wire); on/off return (white wire)
Overload protection (OCP)	< 150% Io	Autorecovery
Overvoltage protection (OVP)	110% to 135% Vo	Latching mode; requires input AC recycle
Overtemp protection (OTP)	—	Autorecovery; hiccup mode
Output isolation	4000 Vac Input to Output 1500 Vac Input to Ground 500 Vac Output to Ground	—

Ordering Information

Model Number	Output	Adjustment Range	Output Current		Output Ripple P/P ¹	Combined Line/Load Regulation
			Min	Max		
LCC250-12U-4P	12 V	±10%	0 A	20.8 A	1%	±2%
LCC250-12U-4PE	12 V	±10%	0 A	20.8 A	1%	±2%
LCC250-12U-7P	12 V	±10%	0 A	20.8 A	1%	±2%
LCC250-12U-7PE	12 V	±10%	0 A	20.8 A	1%	±2%
LCC250-24U-4P	24 V	+14.6/-15%	0 A	10.4 A	1%	±2%
LCC250-24U-4PE	24 V	+14.6/-15%	0 A	10.4 A	1%	±2%
LCC250-24U-7P	24 V	+14.6/-15%	0 A	10.4 A	1%	±2%
LCC250-24U-7PE	24 V	+14.6/-15%	0 A	10.4 A	1%	±2%
LCC250-48U-4P	48 V	±15%	0 A	5.2 A	1%	±2%
LCC250-48U-4PE	48 V	±15%	0 A	5.2 A	1%	±2%
LCC250-48U-7P	48 V	±15%	0 A	5.2 A	1%	±2%
LCC250-48U-7PE	48 V	±15%	0 A	5.2 A	1%	±2%

1. Output ripple measured at the end of the output cable terminated with 10 μ F tantalum capacitor in parallel with 0.1 μ F ceramic capacitor.
2. Additional external capacitance required to meet the indicated Output Ripple Limits. Please check the Technical Reference Notes.
3. China CCC approval applies to part numbers with "-xxE" suffixes only.
4. 12 V output compliance to CE102 requires external filter. Consult Technical Reference Notes.

LCC600

Convection/conduction
mounting

600 Watts

NEW!



Total Power: 600 Watts
of Outputs: Single
Output: 12, 28, 36, 48 V

Special Features

- Baseplate cooled
- -40 to 85 °C operating baseplate temperature
- No derating up to 85 °C baseplate temperature
- Adjustable output
- 10.6 watts per cubic inch
- Differential remote sense
- EMI Class B
- With +5V standby @ 1.5A
- Full DSP controlled
- Optional IP65 ("-4P" suffix) variant
- Optional 277 VAC nominal input ("H" suffix) variant
- Active lshare
- PMBus
- Industrial/Medical safety (Suited for BF Type applications)

Electrical Specifications

Input	
Input range	90-264 VAC (U version) 180-305 VAC (H version)
Frequency	50/60/440 Hz (Agency Approval 47-63 Hz)
Input fusing	12.5 A RMS on both input lines (U Suffix)
Inrush current	< 25 A peak
Power factor	0.99 typical
Harmonics	Meets EN61000-3-2, Class A and C MIL-STD-461F EMI: CE101, CE102, CS101, CS114, CS115 (w/ ext filter)
Input current	< 10 Arms max at 100 VAC
Hold up time	20 ms (main O/P @ 230 Vac)
Efficiency	See datasheet
Isolation	PRI-SEC: 4kVAC (2X MOPP) PRI-CASE: 1.5kVAC (1X MOPP) SEC-CASE: 1.5kVAC (1X MOPP)

Environmental Specifications

Operating Temperature	-40 to 85 °C baseplate
Humidity	10% to 95%
Altitude	15,000 feet operating
Shock	MIL-STD-810F 516.5 Procedure I, VI
Vibration	MIL-STD-810F 514.5 CAT 4, 10
IP Rating	Optional IP65 rated enclosure ("-4P" suffix)
MTBF	See datasheet

Safety

UL + CSA	60950-1 / 60601-1 3rd Ed
TUV	60950-1 / 60601-1
China	CCC
CB Scheme	60950-1 / 60601-1 Certs

Ordering Information

Model Number*	AC Input	Output Setpoint	Setpoint Tolerance	Adjustment Range	Output Current [A]		Max O/P Power [W]	Typical Efficiency **	Standby Output	Combined Line/Load Regulation	Output Ripple
					Min	Max					
LCC600-48U-9P	90 - 264	48 V	±0.5%	44 - 54	0	12.5	600	92%	5 VDC @ 1.5 A	2%	1%
LCC600-48H-9P	180 - 305	48 V	±0.5%	44 - 54	0	12.5	600	92%	5 VDC @ 1.5 A	2%	1%
LCC600-36U-9P	90 - 264	36 V	±0.5%	32 - 38	0	16.7	600	91%	5 VDC @ 1.5 A	2%	1%
LCC600-36H-9P	180 - 305	36 V	±0.5%	32 - 38	0	16.7	600	91%	5 VDC @ 1.5 A	2%	1%
LCC600-28U-9P	90 - 264	28 V	±0.5%	24 - 30	0	25	600	93.5%	5 VDC @ 1.5 A	2%	1%
LCC600-28H-9P	180 - 305	28 V	±0.5%	24 - 30	0	25	600	93.5%	5 VDC @ 1.5 A	2%	1%
LCC600-12U-9P	90 - 264	12 V	±0.5%	12 - 15	0	50	600	90%	5 VDC @ 1.5 A	2%	1%
LCC600-12H-9P	180 - 305	12 V	±0.5%	12 - 15	0	50	600	90%	5 VDC @ 1.5 A	2%	1%

* Change suffix "-9P" to "-4P" for IP65 rated enclosure with fly lead wires.

* Change suffix "-4P" to "-4PR" for IP65 rated enclosure with right angle fly lead wires.

* Contact factory for product availability.

** Typical Efficiency at high line, factory default voltage and full load.

For complete product specifications, technical reference notes and available product options, go to www.Artesyn.com/power

Low Power

External power adapters

3-100 Watts

Special Features

All models feature:

- Wide-range AC input
- High demonstrated MTBF
- Overload protection
- Extensive safety approvals

Many models feature:

- EN61000-3-2 compliance
- Medical approvals
- Thermal protection
- Energy Star/ErP

AC Input:

- Wallmount
 - U.S. – 2-prong
 - China – 2-prong
 - Europe – 2-prong
 - United Kingdom – 3-prong
 - Australia – 2-prong
 - Korea – 2-prong
 - Japan – 2-prong
 - Interchangeable
- Freestanding
 - IEC320 2-pin (C14) & (C6)
 - IEC320 2-pin (C8)

DC Output:

- Single output
 - 2.5 mm barrel plug
 - 2.1 mm right angle plug



Output Power

3 W



	V1	V2	V3	Size W x L x H (mm)	Model
DCH3 Series – USB (Level VI Upgrade)					
5 V @ 0.55 A				1.03" x 2.28" x 2.56" (26.1 x 58 x 65)	DCH3-050EU-0005 DCH3-050EU-0006
5 V @ 0.55 A				2.02" x 2.28" x 1.79" (51.2 x 58 x 46)	DCH3-050UK-0005 DCH3-050UK-0006
5 V @ 0.55 A				1.03" x 2.29" x 2.44" (26.1 x 58 x 62)	DCH3-050US-0005 DCH3-050US-0006

5 W

NEW!



DA5 Series (Level VI)					
5 V @ 1 A				1.73" x 1.57" x 0.98" (44 x 40 x 25)	DA5-050US-B DA5-050US-W
5 V @ 1 A				2.48" x 1.57" x 0.98" (63 x 40 x 25)	DA5-050EU-B
5 V @ 1 A				1.93" x 1.65" x 2.17" (49 x 42 x 55)	DA5-050UK-B
5 V @ 1 A				1.73" x 1.57" x 0.98" (44 x 40 x 25)	DA5-050CH-B

10 W

NEW!



DA10 Series (Level VI)					
5 V @ 2 A				1.73" x 1.57" x 0.98" (44 x 40 x 25)	DA10-050US
5 V @ 2 A				1.73" x 1.57" x 0.98" (44 x 40 x 25)	DA10-050CH
5 V @ 2 A				2.48" x 1.57" x 0.98" (63 x 40 x 25)	DA10-050EU
5 V @ 2 A				1.93" x 1.65" x 2.17" (49 x 42 x 55)	DA10-050UK

Options:

- (1) Interchangeable AC plug - must be purchased separately.
- (2) 2.1 mm x 5.5 mm barrel plug.

Output Power	V1	V2	V3	Size W x L x H (mm)	Model
12 W 	DA12-M Series (Level V only)				
	5 V @ 2 A			1.10" x 2.36" x 2.14" (28 x 60 x 54.3)	DA12-050AU-M
	5 V @ 2 A			1.10" x 2.36" x 2.48" (28 x 60 x 63.1)	DA12-050EU-M
	5 V @ 2 A			1.98" x 2.36" x 1.90" (50.2 x 60 x 48.3)	DA12-050UK-M
	5 V @ 2 A			1.10" x 2.36" x 1.99" (28 x 60 x 50.6)	DA12-050US-M
	5 V @ 2 A			1.1" x 2.36" x 2.06" (28 x 60 x 52.3)	DA12-050MP-M ⁽¹⁾
	5 V @ 2 A				DA12-050MP-M2.1 ⁽²⁾
24 W 	AD24 (Level VI Upgrade)				
	12 V @ 2 A			1.89" x 4.13" x 1.3" (48 x 105 x 33)	AD2412N3L-VI
40 W 	DP40 Series (Level V only)				
	9 V @ 4.4 A			2.4" x 4.88" x 1.55"	DP4009N2M
	9 V @ 4.4 A			(61 x 124 x 39.5)	DP4009N3M
	12 V @ 3.33 A				DP4012N2M
	12 V @ 3.33 A				DP4012N3M
	15 V @ 2.67 A				DP4015N2M
	15 V @ 2.67 A				DP4015N3M
	18 V @ 2.22 A				DP4018N2M
	18 V @ 2.22 A				DP4018N3M
	24 V @ 1.67 A				DP4024N2M
	24 V @ 1.67 A				DP4024N3M
	48 V @ 0.84 A				DP4048N2M
	48 V @ 0.84 A				DP4048N3M
60 W 	DPS50 Series (Level V only)				
	5 V @ 6 A			2.39" x 5.24" x 1.62"	DPS52
	12 V @ 5 A			(60.7 x 133 x 41.15)	DPS53
	15 V @ 4 A				DPS54
	24 V @ 2.5 A				DPS55
	48 V @ 1.25 A				DPS58
100 W 	DP100 Series (Level VI & PoE Isolation)				
	54 V @ 1.85 A			156 x 65 x 37.2	DP10054P3L

NOTE:

Level V products may only be imported into the U.S.A. after February 10 with valid exemptions to Federal Regulations.

Healthcare AC-DC Power Supplies

Up to 24,000 Watts

Artesyn Embedded Technologies produces a wide range of AC-DC power supplies certified for use in medical equipment requiring lower safety ground leakage and higher isolation. The power supplies listed below are designed for use in non-patient critical applications: bio-life science, medical, dental, imaging and laboratory applications such as immunoassay and in-vitro diagnostics machines, ultrasound and mass analyzers. All these power supplies are high efficiency switch-mode designs, and feature medical safety approval to EN60601-1.

Special Features





All models feature:

- Industry standard footprints
- Wide-range AC input
- Remote sense
- Adjustable outputs
- Power fail
- Full power to 50 °C
- High demonstrated MTBF
- Overvoltage protection
- Overload protection
- Built-in EMI filtering
- Medical approvals
- Extensive safety approvals
- Derated operation to 70 °C

Many models feature:

- EN61000-3-2 compliance
- Supervisory outputs (5 V/12 V)
- Wide-adjust floating 4th output
- Single wire current share
- Wide-adjust on single output models
- Voltage monitor/data logging
- Real-time parametric adjustment & control

Output Power		Output				Control	
Forced Air	Free Air	V1	V2	V3	V4	Size W x L x H (mm)	Model
[40 W]	25 W	NPS20-M Series**					
	(1)	5 V @ 5 A [8 A]*				2" x 4" x 1"	NPS22-M
		12 V @ 2.1 A [3.3 A]*				(50.8 x 101.6 x 25.4)	NPS23-M
		15 V @ 1.7 A [2.7 A]*					NPS24-M
		24 V @ 1 A [1.8 A]*					NPS25-M
		48 V @ 0.52 A [0.84 A]*					NPS28-M
[55 W]	40 W	LP40-M Series**					
	(1)	5 V @ 8 A [11 A]*				3" x 5" x 1.2"	LPS42-M
		12 V @ 3.3 A [4.5 A]*				(76.2 x 127 x 30.5)	LPS43-M
		15 V @ 2.6 A [3.6 A]*					LPS44-M
		24 V @ 1.6 A [2.3 A]*					LPS45-M
		5 V @ 4 A [5 A]	12 V @ 2 A [2.5 A]	-12 V @ 0.5 A [0.7 A]			LPT42-M
		5 V @ 4 A [5 A]	15 V @ 2 A [2.5 A]	-15 V @ 0.5 A [0.7 A]			LPT45-M
[60 W]	45 W	NPS40-M Series**					
	(1)	5 V @ 8 A [11 A]*				2" x 4" x 1"	NPS42-M
		12 V @ 3.75 A [5 A]*				(50.8 x 101.6 x 25.4)	NPS43-M
		15 V @ 3 A [4 A]*					NPS44-M
		24 V @ 1.9 A [2.5 A]*					NPS45-M
		48 V @ 0.94 A [1.25 A]*					NPS48-M
[55 W]	45 W	NPT40-M Series**					
	(1)	5 V @ 5 A [8 A]	12 V @ 2.5 A [3 A]	-12 V @ 0.5 A [0.7 A]			NPT42-M
		5 V @ 5 A [8 A]	15 V @ 2 A [2.4 A]	-15 V @ 0.5 A [0.7 A]			NPT43-M
		5 V @ 5 A [8 A]	24 V @ 1 A [1.5 A]	12 V @ 0.5 A [0.7 A]			NPT44-M
[55 W]	55 W	LP50-M Series**					
	(1)	3.3 V @ 8 A	5 V @ 3 A	12 V @ 0.5 A		2" x 4" x 1.3"	LPT51-M
		5 V @ 8 A	12 V @ 3 A	-12 V @ 0.5 A		(50.8 x 101.6 x 33)	LPT52-M
		5 V @ 8 A	15 V @ 2.4 A	-15 V @ 0.5 A			LPT53-M
		5 V @ 8 A	24 V @ 1.5 A	12 V @ 0.5 A			LPT54-M

Options:

[] Rating with 30 CFM of air

(1) Optional cover/enclosure

* Floating output

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[60 W]  (1)	60 W	5 V @ 11 A*					LPS52-M
		12 V @ 5 A*					LPS53-M
		15 V @ 4 A*					LPS54-M
		24 V @ 2.5 A*					LPS55-M
		48 V @ 1.25 A*					LPS58-M
[60 W]  (1)	60 W	NPS60-M Series**					
		5 V @ 11 A*				2" x 4" x 1"	NPS62-M
		12 V @ 5 A*				(50.8 x 101.6 x 25.6)	NPS63-M
		15 V @ 4 A*					NPS64-M
[75 W]  (1)	65 W	NLP65 Series**					
		12 V @ 6.5 A*				3" x 5" x 1.26"	NLP65-9912J ⁽⁵⁾
		15 V @ 5.3 A*				(76.2 x 27 x 32)	NLP65-9915J ⁽⁵⁾
		24 V @ 3.5 A*					NLP65-9924J ⁽⁵⁾
		5 V @ 8 A	12 V @ 3 A				NLP65-9929J ⁽⁵⁾
		5 V @ 8 A	24 V @ 2 A				NLP65-9920J ⁽⁵⁾
		5 V @ 8 A	12 V @ 3 A	-12 V @ 1 A			NLP65-9908J ⁽⁵⁾
[80 W]  (1)	60 W	LP60-M Series**					
		12 V @ 5 A [6.7 A]*				3" x 5" x 1.65"	LPS63-M
		15 V @ 4 A [5.3 A]*				(76.2 x 127 x 41.9)	LPS64-M
		24 V @ 2.5 A [3.3 A]*					LPS65-M
		5 V @ 7 A [8 A]	12 V @ 3 A [3.5 A]	-12 V @ 0.7 A [1 A]			LPT62-M
[130 W]  (1)	80 W	LPT100-M Series**					
		3.3 V @ 13 A [18 A]	5 V @ 5 A [9 A]	12 V @ 1 A [2.3 A]		2" x 4" x 1.28"	LPT101-M
		5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	-12 V @ 1 A [2 A]		(50.8 x 101.6 x 32.7)	LPT102-M
		5 V @ 13 A [18 A]	15 V @ 4 A [7.2 A]	-15 V @ 1 A [1.5 A]			LPT103-M
[150 W]  (1)	100 W	LPS100-M Series**					
		5 V @ 16 A [24 A]*				2" x 4" x 1.29"	LPS102-M
		12 V @ 8.3 A [12.5 A]*				(50.8 x 101.6 x 33)	LPS103-M
		15 V @ 6.7 A [10 A]*					LPS104-M
		24 V @ 4.2 A [6.3 A]*					LPS105-M
		48 V @ 2.1 A [3.1 A]*					LPS108-M
[150 W]  (1)	100 W	TLP150 Series**					
		12 V @ 12.5 A*				3" x 5" x 1.25"	TLP150N-99S12J ^F
		24 V @ 6.3 A*				(177.8 x 101.6 x 31.75)	TLP150N-99S24J ^F
[175 W]  (1)	110 W	LP170-M Series**					
		5 V @ 22 A [35 A]* (2.5-6 V)				4.25" x 8.5" x 1.5"	LPS172-M
		12 V @ 9.1 A [15 A]* (6-12 V)				(108 x 215.9 x 38.1)	LPS173-M
		15 V @ 7.3 A [12 A]* (12-24 V)					LPS174-M
		24 V @ 4.5 A [7.5 A]* (24-54 V)					LPS175-M

Options:

F Replace the 'J' at the end of the model number with 'FJ' when the optional standby output and/or remote ON/OFF control is required e.g., TLP150N-99S12FJ

[] Rating with 30 CFM of air

(1) Optional cover/enclosure (see datasheet for increased dimensions)

(5) These models feature harmonic current correction to EN61000-3-2

* Floating output

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.









Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[200 W]  (1)	100 W	LPQ200-M Series**					
		3.3 V @ 13 A [18 A]	5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	-12 V @ 1 A [2 A]	3" x 5" x 1.32"	LPQ201-M
		5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	24 V @ 1.5 A [3 A]	-12 V @ 1 A [2 A]	(76.2 x 127 x 33.6)	LPQ202-M
[250 W]  (1)	125 W	LPS200-M Series**					
		5 V @ 20 A [40 A]*				3" x 5" x 1.32"	LPS202-M
		12 V @ 10.3 A [20.8 A]*				(76.2 x 127 x 33.6)	LPS203-M
		15 V @ 8.3A [16.6 A]*					LPS204-M
		24 V @ 5.2 A [10.4 A]*					LPS205-M
		48 V @ 2.6 A [5.2 A]*					LPS208-M
[250 W] 	150 W	CPS250-M Series**					
		12 V @ 12.92 A [20.83 A]				2" x 4" x 1.3"	CPS253-M
		24 V @ 6.45 A [10.42 A]				(50.8 x 101.6 x 32.8)	CPS255-M
		36 V @ 4.16 A [6.94 A]					CPS256-M
		48 V @ 3.23 A [5.21 A]					CPS258-M
[360 W] NEW! 	240 W	LPS360-M Series**					
		12 V @ 20 A [30 A]*				3" x 5" x 1.3"	LPS363-M
		15 V @ 16 A [24 A]*				(76.2 x 127 x 33)	LPS364-M
		24 V @ 10 A [15 A]*					LPS365-M
		36 V @ 6.25 A [11.25 A]*					LPS366-M
		48 V @ 5 A [7.5 A]*					LPS368-M
[250 W] 	250 W	LCC250 Series					
		12 V @ 20.8 A				4" x 7" x 1.1"	See LCC250 section
		24 V @ 10.4 A				(101.6 x 177.8 x 28)	
		48 V @ 5.2 A					
[600 W] NEW! 	600 W	LCC600 Series					
		12 V @ 50.0 A				4" x 9" x 1.57"	See LCC600 section
		28 V @ 21.4 A					
		36 V @ 16.7 A				(101.6 x 228.6 x 40)	
		48 V @ 12.5 A					
[500 W]  (4), (5)	200 W	NTS500-M Series**					
		12 V @ 16.6 A [41.7 A]*				4" x 7" x 1.5"	NTS503-M
		24 V @ 8.3 A [20.8 A]*				(101.6 x 177.8 x 38.1)	NTS505-M
		48 V @ 4.2 A [10.4 A]*					NTS508-M

Options:




- (1) Optional cover/enclosure
- (4) Optional top fan covers (see datasheet for increased dimensions)
- (5) Optional end fan cover (see datasheet for increased dimensions)

* Floating output

** This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

Output Power	Output				Size W x L x H (mm)	Model
[Forced Air] Free Air	V1	V2	V3	V4		
[300 W] NEW! 	LCM300 Bulk Front End					
	12-60 V	Single outputs			1.61" x 4.0" x 7.0" (4.09 x 101.6 x 177.8)	See LCM300 section
[600 W] NEW! 	LCM600 Bulk Front End					
	12-60 V	Single outputs			4.5" x 7.5" x 2.4" (114.3 x 190.5 x 62)	See LCM600 section
[1000 W] NEW! 	LCM1000 Bulk Front End					
	12-48 V	Single outputs			2.5" x 5.2" x 10.0" (63.5 x 132.1 x 254)	See LCM1500 section
[1500 W] NEW! 	LCM1500 Bulk Front End					
	12-60 V	Single outputs			2.5" x 5.2" x 10.0" (63.5 x 132.1 x 254)	See LCM1500 section
Up to 1800 W NEW! 	Micro MP Series					
	1.8-60 V	1-12 outputs	(Fully Configurable)		3.5" x 10.11" x 1.57" (88.9 x 256.9 x 40)	See μMP section
Up to 1500 W 	Intelligent MP Series					
	2-60 V	1-21 outputs	Fully configurable and intelligent		5" x 10" x 2.5" (127 x 254 x 63.5)	See iMP section
1500-4920 W 	Intelligent VS Series					
	2-60 V	1-42 outputs	Fully configurable and intelligent		5" x 11" x 5" (127 x 279.4 x 127)	See iVS section
Up to 24000 W NEW! 	Precision High Power System					
	0.12-300 V	Up to 8 outputs	Fully configurable and intelligent		5.22" x 19" x 27.9" (132.5 x 482.6 x 708.3)	See iHP Section



Output Power	V1	V2	V3	Size W x L x H (mm)	Model
12 W	DA12-M Series (Level V only)				
	5 V @ 2 A			1.10" x 2.36" x 2.14" (28 x 60 x 54.3)	DA12-050AU-M
	5 V @ 2 A			1.10" x 2.36" x 2.48" (28 x 60 x 63.1)	DA12-050EU-M
	5 V @ 2 A			1.98" x 2.36" x 1.90" (50.2 x 60 x 48.3)	DA12-050UK-M
	5 V @ 2 A			1.10" x 2.36" x 1.99" (28 x 60 x 50.6)	DA12-050US-M
	5 V @ 2 A			1.1" x 2.36" x 2.06" (28 x 60 x 52.3)	DA12-050MP-M ⁽¹⁾
	5 V @ 2 A				DA12-050MP-M2.1 ⁽²⁾
40 W	DP40 Series (Level V only)				
	9 V @ 4.4 A			2.4" x 4.88" x 1.55" (61 x 124 x 39.5)	DP4009N2M
	9 V @ 4.4 A				DP4009N3M
	12 V @ 3.33 A				DP4012N2M
	12 V @ 3.33 A				DP4012N3M
	15 V @ 2.67 A				DP4015N2M
	15 V @ 2.67 A				DP4015N3M
	18 V @ 2.22 A				DP4018N2M
	18 V @ 2.22 A				DP4018N3M
	24 V @ 1.67 A				DP4024N2M
	24 V @ 1.67 A				DP4024N3M
	48 V @ 0.84 A				DP4048N2M
	48 V @ 0.84 A				DP4048N3M
60 W	DPS50-M Medical (Level V only)				
	5 V @ 6 A			2.39" x 5.24" x 1.62" (60.7 x 133 x 41.15)	DPS52-M
	12 V @ 5 A				DPS53-M
	15 V @ 4 A				DPS54-M
	24 V @ 2.5 A				DPS55-M
	48 V @ 1.25 A				DPS58-M

Options:

- (1) Interchangeable AC plug - must be purchased separately.
- (2) 2.1 mm x 5.5 mm barrel plug

NOTE:

Level V products may only be imported into the U.S.A. after February 10 with valid exemptions to Federal Regulations.



MicroMP Series

Cost-efficient, configurable power supply with market-leading density and efficiency

Up to 1800 Watts with New Product Enhancements


Total Power: Up to 1800 Watts
 Input Voltage: 85-264 Vac
 120-300 Vdc
 # of Outputs: Up to 12

NEW!



Special Features

- Optional conformal coating
- Industrial temp range (-40 °C to 70 °C)
- Industrial shock/vibration (> 50 G's)
- Low cost
- Standard medical leakage (< 400 µA) with Optional low leakage (< 100 µA)
- New 1000W module
- PMBus
- High efficiency
- Low profile 1U size
- Multi output
- Current limit selectable - constant current or foldback
- High power density
 - uMP04: 10.8 W/cu-in
 - uMP09: 18.0 W/cu-in
 - uMP10: 15.1 W/cu-in
 - uMP16: 22.9 W/cu-in
- Intelligent fan (speed control/fault status)
- Low Acoustic Noise
- Downloadable GUI from website
- µP controlled PFC input with active inrush protection
- No preload required
- IEC, Terminal Block, or Barrier Strip input option

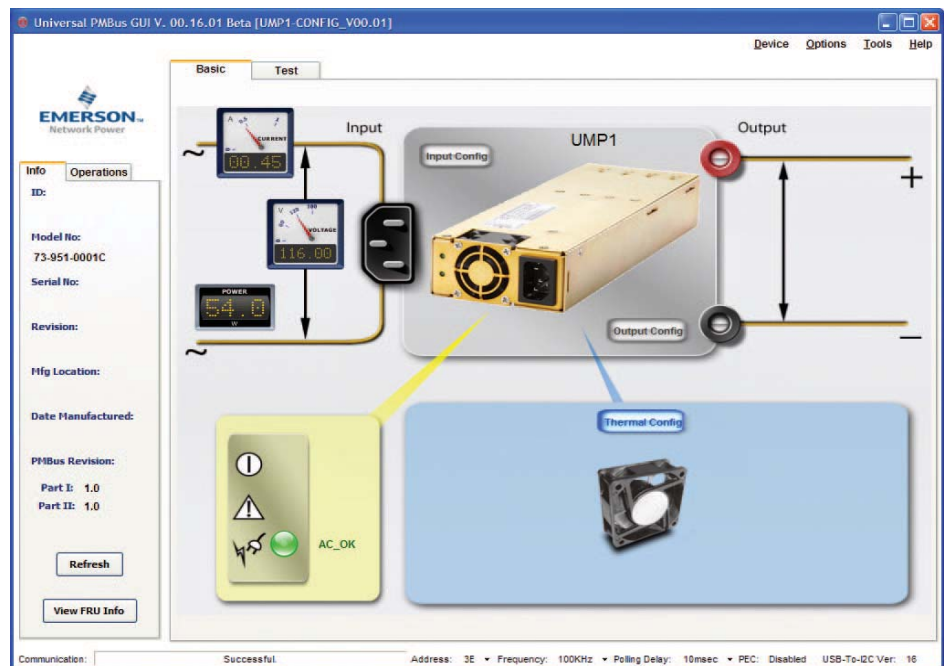

Electrical Specifications

Input	
Input range	85-264 Vac 120-350 Vdc (limited to 300 Vdc in medical apps)
Frequency	47-440 Hz
Inrush current	40 A peak max. (soft start)
Efficiency	Up to 91% @ full case load
Power factor	0.99 typ. meets EN61000-3-2 (n/a @ 440 Hz)
Turn-on time	AC on 2 sec for µMP10/16 and 1.5 sec for µMP04, inhibit/enable 250 ms typical
EMI filter	CISPR 22/EN55022 Level "B"
Leakage current	< 200 µA using center-tapped xfmr measurement method. (< 400 µA @ 264 VAC input)
Radiated EMI	CISPR 22/EN55022 Level "B"
Warranty	Two years

Electrical Specifications

Output	
Factory set point accuracy	±1%
Margining or Optional V Program	±3-7% nominal analog (single output module only)
Overall regulation	0.4% or 30 mV whichever is greater
Ripple	RMS: 0.1% or 10 mV, whichever is greater Pk-Pk: 1.0% or 50 mV, whichever is greater Bandwidth limited to 20 MHz
Dynamic response	< ±5% or 250 mV, with 50% step load
Recovery time	To within 1% in < 300 µs
Reverse voltage protection	100% of rated output current
Thermal protection (OTP)	All outputs disabled when internal temp exceeds safe operating range.
Remote sense	Up to 0.5 V total drop (not available on triple output module)
Single wire parallel	Current share to within 5% of total rated current
DC OK	±5% of nominal
Minimum load	Not required; signal is open collector
Housekeeping standby	5 Vdc @ 2.0 A max. present whenever AC input is applied
Module inhibit	Logic - output on with low or open. Different logic options available
Output/Output isolation	> 1 Megohm, 500 V

Environmental Specifications

Operating temperature	-40 °C to 70 °C ambient. Derate each output 2.5% per degree from 50 °C to 70 °C. (-20 °C start up) Meets full spec after 1/2 load. 10 min warm-up
Storage temp	-40 °C to 85 °C
Electromagnetic susceptibility	Designed to meet EN61000-4; -3, -6, -11 Level 3, Level 4 for -2, -4, -5
Humidity	Operating; non-condensing 10% to 95% RH
Vibration	MIL-STD-810E
MTBF demonstrated	> 350,000 hours at full load, one µMP04 case + two modules, Telcordia SR-332 calculated MTBF
Altitude:	Up to 10k feet; derate linear to 50% from 10k-30k feet

Safety

UL	UL60950/UL60601-1
CSA	CSA22.2 No. 234 Level 5
VDE	EN60950/EN60601-1
BABT	Compliance to EN60950/EN60601 BS7002
CB	Certificate and report
CE	Mark to LVD
CCC	Approved

Voltage Codes

NEW!

Module Output Voltage Code		Single Output One Slot 240 Watts Max	Single Output Three Slots 1000 Watts Max	Dual Output One Slot 96 Watts	
Module Identification		S2	SK*	I	
Code	Volts	Output Current V1	Output Power V1	Output Current V1 V2	
A	2.0	40.0	-	NA	
B	2.2	40.0	-	NA	
C	3.0	40.0	-	NA	
D	3.3	40.0	-	4.0	4.0
E	5.0	36.0	-	4.0	4.0
F	5.2	34.0	-	4.0	4.0
G	5.5	32.0	-	4.0	4.0
H	6.0	30.0	84.0	4.0	4.0
I	8.0	25.0	84.0	4.0	4.0
J	10.0	24.0	84.0	4.0	4.0
K	11.0	22.0	84.0	4.0	4.0
L	12.0	20.0	84.0	4.0	4.0
M	14.0	17.0	71.4	4.0	4.0
N	15.0	16.0	66.7	4.0	4.0
O	18.0	13.0	42.0	4.0	4.0
P	20.0	12.0	42.0	4.0	4.0
Q	24.0	10.0	42.0	4.0	4.0
R	28.0	8.6	35.7	3.4	3.4
S	30.0	8.0	33.3	3.4	3.4
T	33.0	7.0	21.0	NA	
U	36.0	6.7	21.0	NA	
V	42.0	5.7	21.0	NA	
W	48.0	5.0	21.0	NA	
X	54.0	4.4	18.5	NA	
Y	60.0	4.0	16.7	NA	

* Note: Contact factory for availability

Parallel Codes					
Code	Slots in Parallel	Code	Slots in Parallel	Code	Slots in Parallel
1	1&2	6	1&2&3	B	1,2&3; 4&5
2	2&3	7	1,2,3&4	C	1,2,3&4; 5&6
3	3&4	8	1,2,3,4&5	D	1&2; 3&4; 5&6
4	4&5	9	1,2,3,4,5&6	E	1,2&3; 4,5&6
5	5&6	A	1&2; 3&4	O	no module in parallel
				H	3,4&5
				J	3,4,5&6
				K	4,5&6

Ordering Information

Case Size	Module/Voltage	Case Option Codes	Software Code	Hardware Code
µMPXY	S2E - S1L - DER - ILL	00	A	###
Case Size (inch) 1-Phase Input where X = 04 = 1.57" x 3.5" x 10.0", 400W - 600W 4 Slots 09 = 1.57" x 3.5" x 10.0", 600W-1000W, 4 Slots 10 = 1.57" x 5.0" x 10.0", 1000W-1200W, 6 Slots 16 = 1.57" x 5.0" x 10.0", 1200W-1600W, 6 Slots Input Type where Y = S = Barrier Strip T = Terminal Block C = IEC Connector C14	Module Codes S2 = 200 W Single O/P (1 slot) SK = 1000 W Single O/P (3 slot) I = 96W Dual O/P ISO GND (1 Slot) Voltage Codes: See Voltage Code Table	Case Option Codes First digit 0 - K = Parallel Code Second digit 0 = No Options 1 = Reverse Air 2 = Not Used 3 = Global Enable 5 = Opt 1 + Opt 3	Factory assigned for modified standards	Factory assigned for modified standards

MP Series

Modular power supply for optimum flexibility

Up to 1200 Watts

Total Power: Up to 1200 Watts
 Input Voltage: 85-264 Vac
 120-350 Vdc
 # of Outputs: Up to 21



MP1



MP6



MP4

Special Features

- Low cost
- Current share on all outputs with ratings of 10 A or greater
- Remote sense on all outputs with ratings greater than 2 A
- Overload protection on all outputs
- Voltage adjustment on all outputs
- Margining on all single output modules
- Input OK signal and status indicator LED
- Global DC OK signal and status indicator LED
- Global and individual module inhibits/enable
- Forced air cooling or customer provided air option
- Isolated 1 A 5 V bias voltage
- Power factor correction
- EN61000-3-2 harmonic distortion compliance
- CISPR 22, EN55022 Curve B conducted/radiated EMI
- European CE Mark requirements
- Optional VME timing and system DC OK module
- Low leakage option
- EN61000 immunity standards
- Standard modification flexibility (see datasheet on Artesyn.com/Power)

Special Purpose Modules

- Battery charger module
- Extended hold-up module
- High voltage module (non-isolated)
- OR-ing diode module



Electrical Specifications

Input	
Input voltage	85-264 Vac 120-350 Vdc
Frequency	47-440 Hz
Inrush current	40 A peak maximum (soft start)
Efficiency	70-80% typ. @ full case load
Power factor	0.99 typ. meets EN61000-3-2 (N/A @ 440 Hz)
Turn-on time	AC on 1.5 second typical Inhibit/enable 150 ms typical
EMI filter standard	CISPR 22 EN55022 Level "B"
EMI filter (low leakage option)	CISPR 22 EN55022 Level "A"
Leakage current standard	2.0 mA maximum @ 240 Vac
Leakage current (low leakage option)	300 μ A maximum @ 240 Vac
Radiated EMI	CISPR 22 EN55022 Level "B"
Holdover storage	20 ms minimum (independent of input Vac)
AC OK	> 5 ms early warning minimum before outputs lose regulation Full cycle ride thru (50 Hz)
Harmonic distortion	Meets EN61000-3-2
Isolation	Meets EN60950
Global inhibit/enable	TTL, Logic "1" and Logic "0"; configurable
Input fuse (internal)	MP4: 10 A; MP6: 15 A; MP8: 20 A; MP1: 20 A
Warranty	Two years

Output

Adjustment range	±10% minimum all outputs
Margining	±4-6% nominal ¹
Overall regulation	0.4% or 20 mV maximum (36 W modules 4% maximum)
Ripple	RMS: 0.1% or 10 mV, whichever is greater; Pk-Pk: 1.0% or 50 mV, whichever is greater; bandwidth limited to 20 MHz
Dynamic response	< 2% or 100 mV, with 25% load step
Recovery time	To within 1% in < 300 µs second
Overcurrent protection	Single, main of dual output module 105-120% of rated output current
Short-circuit protection	Protected for continuous short-circuit Recovery is automatic upon removal of short
Overvoltage protection (measured at sense connection)	Single output modules
Reverse voltage protection	100% of rated output current
Thermal protection	All outputs disabled when internal temp exceeds safe operating range. > 5 ms warning (AC OK signal) before shutdown
Remote sense	Up to 0.5 V total drop (not available on triple output module)
Single wire parallel	Current share to within 2% of total rated current ²
DC OK	-2% to -8% of nominal for any monitored output ²
Minimum load	Not required on single or triple output modules. 10% required on main of dual output modules ³
Housekeeping standby	5 Vdc @1.0 A maximum present whenever AC input is applied (optional 2.0 A available)
Module inhibit	TTL, isolated, singles and dual (both outputs) only
Switching frequency	250 kHz
Output/output isolation	> 1 Megohm
VME signal option board	POR signal & quad external DC OK

Environmental Specifications

Operating temperature	-20 °C to 50 °C (start @ 0 °C) (derate each output linearly to 50% at 70 °C) (-20 °C to 40 °C max. with rear air option)
Shock/Vibration	MIL-HDBK 810E
Humidity	95% non-condensing
Storage temperature	-40 °C to 85 °C
Temperature coefficient	0.02% per °C
Cooling:	Internal DC fan or customer provided air (option)

Safety

UL	UL1950
CSA	CSA22.2 No. 234 Level 5
IEC	IEC950, Class 1
VDE	EN60950-1
BABT	Compliance to EN 60950, BS 7002
CB	Certificate and report
CE	Mark

Notes:

1. Single output modules only
2. Single and main of dual output modules only
3. Contact factory for optional preload if required

Ordering Information

Sample below is 1200 W case with 12 V @ 50 A; 5 V @ 60 A; 24 V @ 8.5 A; 12 V @ 10 A; 12 V @ 4 A; extended hold-up with no options.

Case Size	Module/Voltage(s) First - Module Code Second - Voltage Code	Add-on Modules Requires 1 slot each	Case Option Codes	Hardware Code
MP1	3L - 2E - 1Q - 4LL	HUP	00	###
Case Size (mm) 4 = 2.5" x 5" x 10"; 400-600 W, 5 Slots (63.5 x 127 x 254) 6 = 2.5" x 5" x 11"; 600 -800 W, 5 Slots (63.5 x 127 x 279.4) 1 = 2.5" x 8" x 11"; 1000-1200 W, 7 Slots (63.5 x 203.2 x 279.4)	Module Codes Module/Voltage/Option Codes Module Codes: (None) = 36 W Triple O/P (1 slot) 1 = 210 W Single O/P (1 slot) 2 = 360 W Single O/P (2 slot) 3 = 750 W Single O/P (3 slot) 4 = 144 W Dual O/P (1 slot) 5 - 9 = Future Voltage Codes: See Output Module Voltage/ Current table	Add-on Modules HUP = Hold up module VME = VME POR signal and isolated DC	Case Option Codes First Digit 0 - 9 = parallel code (See MP parallel codes table on following page) Second Digit Standard Options 0 = no options 1 = rear air exhaust 3 = global enable 5 = option package (options 1 & 3) M = low leakage N = low leakage plus option 1 P = low leakage plus option 3 R = low leakage plus option 5	Factory assigned for modifications

Intelligent MP Series

*Intelligent modular power supply
for optimum flexibility*


Up to 1500 Watts

Total Power: Up to 1500 Watts
Input Voltage: 85-264 Vac
120-300 Vdc
of Outputs: Up to 21



iMP™


PMBUS

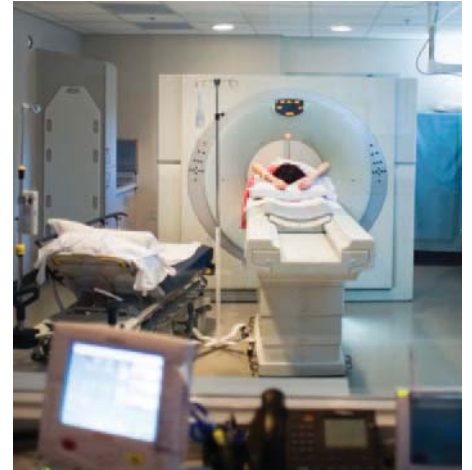

Special Features

- **Medical EN60601-1 approval**
- Intelligent I²C control
- Voltage adjustment on all outputs (Manual or I²C)
- Configurable input and output (case and module) OK signals and indicators
- Configurable inhibit/enable
- Configurable output UP/DOWN sequencing
- Configurable current limit (foldback or constant current)
- High power density (8.8 W/cu-in)
- Intelligent fan (speed control/fault status)
- Downloadable GUI from website
- Customer provided air option
- μ P controlled PFC input with active inrush protection
- I²C monitor of voltage, current and temp
- Programmable voltage, current limit, inhibit/enable through I²C
- Optional extended hold-up module (SEMI F47 compliance)
- CAN BUS and RS-485 interface option
- Low leakage (< 300 μ A)
- Increased power density to 50% over standard MP
- Backward compatibility with standard MP
- External switching frequency sync input
- Optional conformal coating
- Industrial temp range (-40 °C to 70 °C)
- No preload required
- Industrial shock/vibration (> 50 G's)

Electrical Specifications

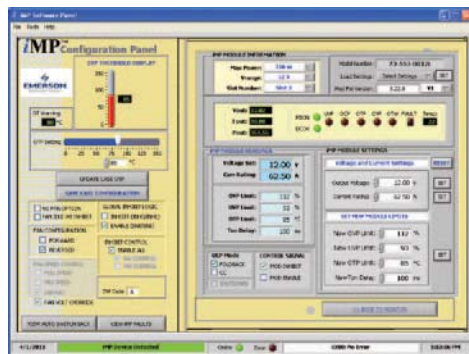

The iMP software is designed to make the iMP Power Supply Unit (PSU) accessible to the user. It is intended to provide information gathered from the PSU and interactive controls to the basic capabilities of iMP power supply. To download go to: www.artesyn.com/power/impsoftware

Input	
Input range	85-264 Vac 120-350 Vdc (limited to 300 Vdc in medical applications)
Frequency	47-440 Hz
Inrush current	40 A peak max. (soft start)
Efficiency	Up to 85% @ full case load
Power factor	0.99 typ. meets EN61000-3-2 (n/a @ 440 Hz)
Turn-on time	AC on 2 sec typ., inhibit/enable 150 ms typical Programmable delay; 50 ms internal turn-on delay (Dual Output only)
EMI filter	CISPR 22/EN55022 Level "B"
Leakage current	300 μ A max. @ 240 Vac; 47-63 Hz
Radiated EMI	CISPR 22/EN55022 Level "B"
Holdover storage	20 ms minimum (independent of input Vac) additional 34 ms holdover storage with optional HUP module (SEMI F47 compatible)
AC OK	> 5 ms early warning min. before outputs lose regulation Full cycle ride thru (50 Hz) (N/A on iMP4 > 750 W @ 90 Vac)
Harmonic distortion	Meets EN61000-3-2
Isolation	Meets EN60950 and EN60601
Global Inhibit/Enable	TTL, Logic "1" and Logic "0"; configurable
Input fuse (internal)	iMP4: 16 A; iMP8: 20 A; iMP1: 25 A (both lines fused)
Warranty	Two years

Output

Adjustment range*	±10% minimum all outputs (manual) (full module adjustment range using I ² C)
Margining	±4-6% nominal analog (single output module only)
Overall regulation	0.4% or 20 mV max. (1500 W modules 1% max. 36 W modules 4% max.)
Ripple	RMS: 0.1% or 10 mV, whichever is greater Pk-Pk: 1.0% or 50 mV, whichever is greater Bandwidth limited to 20 MHz
Dynamic response	< 2% or 100 mV, with 25% load step
Recovery time	To within 1% in < 300 μs
Overcurrent protection**	Configurable through I ² C (calibration required). Single output module and main output of the dual output module 105-120% of rated output current. Aux output of dual output module 105-140% of rated output current
Short-circuit protection	Protected for continuous short-circuit Recovery is automatic upon removal of short
Overvoltage protection*	Configurable through I ² C - Single output module 2-5.5 V 122-134%; 6-60 V 110-120% - Dual output module 2-6 V 122-134%; 8-28 V 110-120% - Triple output module
Reverse voltage protection	100% of rated output current
Thermal protection* (OTP and OTW)	Configurable through I ² C All outputs disabled when internal temp exceeds safe operating range. > 5 ms warning (AC OK signal) before shutdown
Remote sense	Up to 0.5 V total drop (not available on triple output module)
Single wire parallel	Current share to within 2% of total rated current
DC OK*	±5% of nominal. Configurable through I ² C
Minimum load	Not required
Housekeeping standby	5 Vdc @ 1.0 A max. present whenever AC input is applied (Optional 2.0 A available)
Module inhibit*	Configured and controlled through I ² C
Switching frequency	250 kHz accepts external sync signal
Output/Output isolation	> 1 Megohm, 500 V

* Can be controlled via I²C** Controlled via I²C but requires load calibration**Environmental Specifications**

Operating temperature	-40 °C to 70 °C ambient. Derate each output 2.5% per degree from 50 °C to 70 °C. (-20 °C start up)
Storage temperature	-40 °C to 85 °C
Electromagnetic susceptibility	Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity	Operating; non-condensing 10% to 95% RH
Vibration	IEC68-2-6 to the levels of IEC721-3-2
MTBF demonstrated	> 550,000 hours at full load, 220 Vac and 25 °C ambient conditions

Safety

UL	UL60950/UL2601
CSA	CSA22.2 No. 234 Level 5
VDE	EN60950/EN60601-1
BABT	Compliance to EN60950/ EN60601 BS7002
CB	Certificate and report
CE	Mark to LVD

Output Module Line-up

Module Code	1	2	3	5	4	
Module Type	Single	Single	Single	Single	Dual	Triple
Max output power	210 W	360 W	750 W	1500 W	144 W	36 W
Max output current	35 A	60 A	150 A	300 A	10 A	2 A
Output voltages available*	2-60 V	2-60 V	2-60 V	2-60 V	6-15, 24-28; 6-15; 6-15; 6-15; 2-6; 2-6, 2-6; 24-28, 24-28; 24-28; 2-6	8-15, 8-15, 2-6; 8-15, 8-15, 8-15; 8-15, 8-15, 18-28; 8-15, 18-28, 2-6
Standard voltage increments	25	25	25	18	16	18
Remote sense	Yes	Yes	Yes	Yes	Yes	No
Remote margin*	Yes	Yes	Yes	Yes	No	No
V-Program - I ² C Control*	Yes	Yes	Yes	Yes	Yes	No
Active Current Share	Yes	Yes	Yes	Yes	Yes	No
Module Inhibit - I ² C Control*	Yes	Yes	Yes	Yes	Yes	Yes
Module Inhibit - Analog	Yes	Yes	Yes	Yes	No	No
Overvoltage/Overcurrent protection*	Yes	Yes	Yes	Yes	Yes	Yes
Minimum load required	No	No	No	No	No	No
Slots occupied in any iMP case	1	2	3	4	1	1

* Programmable

Output Module Voltage/Current

Voltage	Voltage Code	Single Output Module Code				Dual Output**		Triple Output			I ² C Adjustment Ranges***
		1	2	3	5+	V1	V2	—	—	—	
2 V	A	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	1.8-2.2
2.2 V	B	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	2.0-2.4
3 V	C	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	2.7-3.3
3.3 V	D	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	3.0-3.6
5 V	E	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	4.5-5.5
5.2 V	F	35 A	60 A	144 A	288 A	10 A	10 A	—	—	2 A	4.7-5.7
5.5 V	G	34 A	58 A	136 A	273 A	10 A	10 A	—	—	2 A	5.0-6.1
6 V	H	23 A	42 A	97.5 A	250 A	10 A*	10 A*	—	—	2 A	5.4-6.6
8 V	I	20 A	36 A	84.4 A	140 A	10 A	4 A	1 A	1 A	1 A	7.2-8.8
10 V	J	18 A	32 A	75 A	140 A	10 A	4 A	1 A	1 A	1 A	9.0-11.0
11 V	K	17 A	31 A	68 A	136.3 A	10 A	4 A	1 A	1 A	1 A	9.9-12.1
12 V	L	17 A	30 A	62.5 A	125 A	10 A	4 A	1 A	1 A	1 A	10.8-13.2
14 V	M	14 A	21 A	53.5 A	107 A	9 A	4 A	1 A	1 A	1 A	12.6-15.4
15 V	N	14 A	20 A	50 A	100 A	8 A	4 A	1 A	1 A	1 A	13.5-16.5
18 V	O	11 A	19 A	41.6 A	83.3 A	—	—	—	0.5 A	0.5 A	16.2-19.8
20 V	P	10.5 A	18 A	37.5 A	75 A	—	—	—	0.5 A	0.5 A	18.0-22.0
24 V	Q	8.5 A	15 A	30 A	62.5 A	4 A	2 A	—	0.5 A	0.5 A	21.6-26.4
28 V	R	6.7 A	11 A	26.8 A	53.5 A	3 A	2 A	—	0.5 A	0.5 A	25.2-30.8
30 V	S	6.5 A	11 A	25 A	50 A	—	—	—	—	—	27.0-33.0
33 V	T	6.2 A	10.9 A	22.7 A	35.8 A	—	—	—	—	—	29.7-36.3
36 V	U	5.8 A	10 A	20.8 A	35.8 A	—	—	—	—	—	32.4-39.6
42 V	V	4.2 A	7.5 A	16 A	35.7 A	—	—	—	—	—	37.8-46.2
48 V	W	4 A	7.5 A	15.6 A	31.2 A	—	—	—	—	—	43.2-52.8
54 V	X	3.7 A	6 A	13.9 A	27.7 A	—	—	—	—	—	48.6-59.4
60 V	Y	3.5 A	6 A	12.5 A	25 A	—	—	—	—	—	54.0-66.0
Consult Factory											
Special	Z	35 A	60 A	150 A	—	—	10 A	—	—	—	2.3-2.6
Special	Z	35 A	60 A	150 A	—	—	10 A	—	—	—	3.7-4.4
Special	Z	20 A	36 A	80 A	140 A	—	8 A	—	—	—	6.7-7.1


* Note: Contact factory for extended range down to 6 V.

** Total output power on dual module must not exceed 144 W.

*** For single output modules only.

+ Applicable for iMP1 only.

Parallel Codes

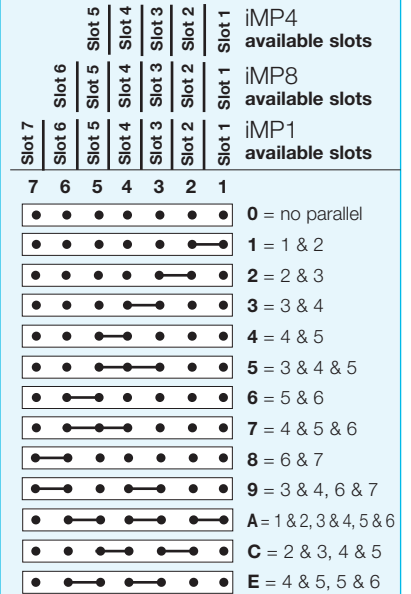

Increments of current not shown can be achieved by paralleling modules (add currents of each module selected).

Ordering Information

Sample below is 1500 W case with 12 V @ 62.5 A; 5 V @ 60 A; 24 V @ 8.5 A; 12 V @ 10 A; 12 V @ 4 A; with no options.

Case Size	Module/Voltage/Option Codes	Case Option Codes	Software Code	Hardware Code
iMP1*	First - Module Code Second - Voltage Code Third - Option Code			
3L0 - 2E2 - 1Q1 - 4LL0		00	A	###
Case Size (mm) 4 = 2.5" x 5" x 10"; 750-1100 W, 5 slots (63.5 x 127 x 254) 8 = 2.5" x 7" x 10"; 1000-1200 W, 6 slots (63.5 x 177.8 x 254) 1 = 2.5" x 8" x 11"; 1200-1500 W, 7 slots (63.5 x 203.2 x 279.4) *Note: Add "E" after iMP4 to denote IEC input option. e.g., iMP4E (Not available on iMP8 or iMP1)	Module Codes Module/voltage/option codes Module codes: (None) = 36 W triple O/P (1 slot) 1 = 210 W single O/P (1 slot) 2 = 360 W single O/P (2 slot) 3 = 750 W single O/P (3 slot) 4 = 144 W dual O/P (1 slot) 5 = 1500 W single O/P (4 slot) 6 - 9 = Future Voltage Codes: See Output Module Voltage/Current table above Option Codes: 0 = Standard 1 = Module enable 2 = Constant current 3 = 1 & 2 combined 4 = Set for use in standard (non-intelligent case) 5 = Shutdown mode for 1500 W 6 = 1 & 5 combined 7 - 9 = Future	Case Option Codes First digit 0 - 9 = parallel code (See Parallel Codes table above) Second digit 0 = No options 1 = Reverse air 3 = Global enable 4 = Fan idle w/inhibit 5 = Opt 1 + Opt 3 6 = Opt 1 + Opt 4 7 = Opt 3 + Opt 4 8 = Opt 1 + 3 + 4 9 = RS-485 73-544-002 C = 9 + 3 D = CANBUS 73-544-003 E = D + 3	Software code used for configuration change. "A" is standard	Factory assembled for hardware of firmware mods.

Ordering Note:

- The cases and modules of both MP and iMP series can be interchanged to allow more flexibility. If intelligent modules are used with non-intelligent cases, a numeric code "4" is placed at the end of the module code (e.g., 4LL0 becomes 4LL4).
- USB to I²C module order code 73-769-001 or -002

Intelligent VS Series

*Intelligent modular power supply
for optimum flexibility*

Up to 4920 Watts

Total Power: Up to 4920 Watts
Input Voltage: 85-264 Vac
120-300 Vdc
of Outputs: Up to 24

iVS™




Special Features

- **Medical EN60601-1 approval**
- Intelligent I²C control
- Voltage adjustment on all outputs (manual or I²C)
- Configurable input and output OK signals and indicators
- Configurable inhibit/enable
- Configurable output UP/DOWN sequencing
- High power density (12 W/cu-in)
- Intelligent fan (speed control/fault status)
- μ P controlled PFC input with active Inrush protection
- I²C monitor of voltage, current and temp
- Programmable voltage, current limit, inhibit/enable through I²C
- CAN BUS and RS-485 interface option
- Optional extended hold-up module (SEMI F47 compliance)
- Increased power density to 150%
- Optional conformal coating
- Industrial temp range (-40 °C to 70 °C)
- Uses standard iMP modules
- Field upgradeable firmware
- RoHS compliant

Single



210 W



750 W



360 W



1500 W (2.0 - 8.0 V)

Dual



144 W



1500 W (10 - 60 V)

Triple



36 W



1500 W with Bus Bar Adaptor Option
(used with the 10 - 60 V module)

Electrical Specifications

Input

Input range

iVS1 & iVS3:	90-264 Vac 1Ø; 120-300 Vdc
iVS6 & iVS8:	170-264 Vac 3Ø
iVS8H:	380/480 Vac 3Ø

Frequency	47-440 Hz
Inrush current	40 A peak maximum (soft start)
Efficiency	Up to 85% @ full case load
Power factor	0.99 typ. meets EN61000-3-2
Turn-on time	AC on 1.5 sec typical, inhibit/enable 150 ms typical. Programmable
EMI Filter	CISPR 22/EN55022 Level "B"
Leakage current	300 μ A max. @ 240 Vac; 47-63 Hz
Radiated EMI	CISPR 22/EN55022 Level "B"
Holdover storage	10 ms minimum (independent of input Vac) additional 20 ms holdover storage with optional HUP module (SEMI F47 compatible)
AC OK	> 5 ms early warning minutes before outputs lose regulation. Full cycle ride thru (50 Hz). Programmable
Harmonic distortion	Meets EN61000-3-2
Isolation	Meets EN60950 and EN60601
Global inhibit/enable	TTL, Logic "1" and Logic "0"/configurable
Warranty	Three years

Output

Adjustment range*	±10% minimum all outputs (manual) (full module adjustment range using I ² C)
Margining	±4-6% nominal analog (single output module only)
Overall regulation	0.4% or 20 mV max. (1500 W modules 1% max.)
Ripple	RMS: 0.1% or 10 mV, whichever is greater Pk-Pk: 1.0% or 50 mV, whichever is greater Bandwidth limited to 20 MHz
Dynamic response	< 2% or 100 mV, with 25% load step
Recovery time	To within 1% in < 300 µs
Overcurrent protection**	Configurable through I ² C. single output module and main output of the dual output module 105-120% of rated output current. Aux output of dual output module 105-140% of rated output current. Special programmable OCP delay on 1500 W module from 100 ms to 25.5 seconds with shutdown features
Short-circuit protection	Protected for continuous short-circuit Recovery is automatic upon removal of short (Shutdown mode on 1500 W module)
Overvoltage protection*	Configurable through I ² C – Single output module 2-5.5 V 122-134%; 6-60 V 110-120% – Dual output module 2-6 V 122-134%; 8-28 V 110-120% – Triple output module No overvoltage protection provided
Thermal protection*	Configurable through I ² C All outputs disabled when internal temp exceeds safe operating range. > 5 ms warning (AC OK signal) before shutdown
Remote sense	Up to 0.5 V total drop (not available on triple output module)
Single wire parallel	Current share to within 2% of total rated current
DC OK*	±5% of nominal. Configurable through I ² C
Minimum load	Not required
Housekeeping bias voltage	5 Vdc @1.0 A max. present whenever AC input is applied
Module inhibit*	Configured and controlled through I ² C
Output/Output isolation	> 1 Megohm, 500 V

* Can be controlled via I²C** Controlled via I²C but requires load calibration**Environmental Specifications**

Operating temperature	-40 °C to 70 °C ambient. Derate each output 2.5% per degree from 50 °C to 70 °C. (-20 °C start up)
Storage temperature	-40 °C to 85 °C
Electromagnetic susceptibility	Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity	Operating; non-condensing 10% to 95% RH
Vibration	IEC68-2-6 to the levels of IEC721-3-2
MTBF demonstrated	> 550,000 hours at full load, 220 Vac and 25 °C ambient conditions

Safety

UL	UL60950/UL2601
CSA	CSA22.2 No. 234 Level 5
VDE	EN60950/EN60601-1
BABT	Compliance to EN60950/ EN60601 BS7002
CB	Certificate and report
CE	Mark to LVD

Output Module Line-up

Module Code	1	2	3	5	4	
Module Type	Single	Single	Single	Single	Dual	Triple
Max output power	210 W	360 W	750 W	1500 W	144 W	36 W
Max output current	35 A	60 A	150 A	300 A	10 A	2 A
Output voltages available*	2-60 V	2-60 V	2-60 V	2-60 V	6-15, 24-28; 6-15; 6-15; 6-15; 2-6; 2-6, 2-6; 24-28, 24-28; 24-28; 2-6	8-15, 8-15, 2-6; 8-15, 8-15, 8-15; 8-15, 8-15, 18-28; 8-15, 18-28, 2-6
Standard voltage increments	25	25	25	18	16	18
Remote sense	Yes	Yes	Yes	Yes	Yes	No
Remote margin*	Yes	Yes	Yes	Yes	No	No
V-Program - I ² C Control*	Yes	Yes	Yes	Yes	Yes	No
Active Current Share	Yes	Yes	Yes	Yes	Yes	No
Module Inhibit - I ² C Control*	Yes	Yes	Yes	Yes	Yes	Yes
Module Inhibit - Analog	Yes	Yes	Yes	Yes	No	No
Overvoltage/Overcurrent protection*	Yes	Yes	Yes	Yes	Yes	Yes
Minimum load required	No	No	No	No	No	No
Slots occupied in any iMP case	1	2	3	4	1	1

* Programmable



Output Module Voltage/Current

Voltage	Voltage Code	Single Output Module Code				Dual Output**		Triple Output			I _C Adjustment Ranges***
		1	2	3	5	V1	V2				
2 V	A	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	1.8-2.2
2.2 V	B	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	2.0-2.4
3 V	C	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	2.7-3.3
3.3 V	D	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	3.0-3.6
5 V	E	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A	4.5-5.5
5.2 V	F	35 A	60 A	144 A	288 A	10 A	10 A	—	—	2 A	4.7-5.7
5.5 V	G	34 A	58 A	136 A	273 A	10 A	10 A	—	—	2 A	5.0-6.1
6 V	H	23 A	42 A	97.5 A	250 A	10 A*	10 A*	—	—	2 A	5.4-6.6
8 V	I	20 A	36 A	84.4 A	140 A	10 A	4 A	1 A	1 A	1 A	7.2-8.8
10 V	J	18 A	32 A	75 A	140 A	10 A	4 A	1 A	1 A	1 A	9.0-11.0
11 V	K	17 A	31 A	68 A	136.3 A	10 A	4 A	1 A	1 A	1 A	9.9-12.1
12 V	L	17 A	30 A	62.5 A	125 A	10 A	4 A	1 A	1 A	1 A	10.8-13.2
14 V	M	14 A	21 A	53.5 A	107 A	9 A	4 A	1 A	1 A	1 A	12.6-15.4
15 V	N	14 A	20 A	50 A	100 A	8 A	4 A	1 A	1 A	1 A	13.5-16.5
18 V	O	11 A	19 A	41.6 A	83.3 A	—	—	—	0.5 A	0.5 A	16.2-19.8
20 V	P	10.5 A	18 A	37.5 A	75 A	—	—	—	0.5 A	0.5 A	18.0-22.0
24 V	Q	8.5 A	15 A	30 A	62.5 A	4 A	2 A	—	0.5 A	0.5 A	21.6-26.4
28 V	R	6.7 A	11 A	26.8 A	53.5 A	3 A	2 A	—	0.5 A	0.5 A	25.2-30.8
30 V	S	6.5 A	11 A	25 A	50 A	—	—	—	—	—	27.0-33.0
33 V	T	6.2 A	10.9 A	22.7 A	35.8 A	—	—	—	—	—	29.7-36.3
36 V	U	5.8 A	10 A	20.8 A	35.8 A	—	—	—	—	—	32.4-39.6
42 V	V	4.2 A	7.5 A	16 A	35.7 A	—	—	—	—	—	37.8-46.2
48 V	W	4 A	7.5 A	15.6 A	31.2 A	—	—	—	—	—	43.2-52.8
54 V	X	3.7 A	6 A	13.9 A	27.7 A	—	—	—	—	—	48.6-59.4
60 V	Y	3.5 A	6 A	12.5 A	25 A	—	—	—	—	—	54.0-66.0
Consult Factory											
Special	Z	35 A	60 A	150 A	—	—	10 A	—	—	—	2.3-2.6
Special	Z	35 A	60 A	150 A	—	—	10 A	—	—	—	3.7-4.4
Special	Z	20 A	36 A	80 A	140 A	—	8 A	—	—	—	6.7-7.1

* Note: Consult factory for extended range down to 6V.

** Total output power on dual model must not exceed 144 W.

*** For single output modules only.

Ordering Information

Sample below is 3210 W case with 12 V @ 125 A; 24 V @ 8.5 A; 5 V @ 60 A; 12 V @ 10 A and 12 V @ 4 A; with no options.

Case Size	Module/Voltage/Option Codes	Case Option Codes	Software Code	Hardware Code
iVS1	5L1 - 1Q1 - 2E0 - 4LL0	00	A	###
Case Size (mm) 1-Phase Input 1 = 5" x 5" x 11"; 1500-3210 W, 9 slots (127 x 127 x 279.4) 3 = 5" x 8" x 11"; 1800-4920 W, 14 slots (127 x 203.2 x 279.4) 3-Phase Input* 6 = 5" x 5" x 11"; 3120 W, 9 slots (127 x 127 x 279.4) 8 = 5" x 8" x 11"; 4920 W, 14 slots (127 x 203.2 x 279.4) 8H = 5" x 8" x 11"; 4920 W, 14 slots (127 x 203.2 x 279.4) Note: The input is 440 VAC 3 phase nominal *3-phase versions not medically approved	Module Codes Module/voltage/option codes Module Codes: (None) = 36 W triple O/P (1 slot) 1 = 210 W single O/P (1 slot) 2 = 360 W single O/P (2 slot) 3 = 750 W single O/P (3 slot) 5 = 1500 W single O/P (slot 4) 4 = 144 W dual O/P (1 slot) HUP = Extra 30mS hold-up (1 slot) Voltage Codes: See Output Module Voltage/Current table above Option Codes: 0 = Standard 1 = Module enable 2 = Constant current 3 = 1 & 2 combined 4 = Set for use in standard (non-intelligent case) 5 = Shutdown mode for 1500 W 6 = 1 & 5 combined 7-9 = Future	Case Option Codes First Digit 0 - 9 = Parallel code (See parallel codes table in datasheet) Second Digit 0 = No options 1 = Reverse air 2 = Not used 3 = Global enable 4 = Fan idle w/inhibit 5 = Opt 1 + Opt 3 6 = Opt 1 + Opt 4 7 = Opt 3 + Opt 4 8 = Opt 1 + 3 + 4 9 = RS485 73-544-001 B = USB 73-546-001 C = 9 + 3 D = CANBus 73-544-004 E = D + 3	Software code used for configuration change. "A" is standard	Factory assembled for hardware of firmware mods.
Ordering Note: 1. USB to I ² C module order code 73-769-001				

Precision High Power System

Multi output precision high power system

Up to 24000 Watts

Total Power: Up to 24 KW
 Input Voltage: 180-264 VAC
 342-528 VAC
 3-Phase
 # of Outputs: Up to 8

NEW!

iHP



Special Features

- Standard 19" rack
- Outputs parallel up to 1600 A
- Outputs series up to 1000 V
- 100% digital control
- Outputs program as voltage or current source
- Versatile input configurable to:
 - Low Line 180-264 VAC 3-Phase
 - High Line 342-528 VAC 3-Phase
- Medical safety approved – NO ISOLATION XFMR NEEDED
- Flexible control interfaces (Ethernet, RS485, etc.)
- Air cooled
- Semi F47 compliance
- Field upgradeable firmware
- Self help monitoring
- Programmable slew rate
- Fast current slew rate up to 200 Hz
- Active power factor correction
- User defined command profiles

Electrical Specifications

Input	
Input Parameter	Type: 19" Rack 24 KW 3-Phase Air Cooled (iHP24L/H3A)
Mechanical (H x W x D)	5.22" x 19.0" x 27.9" (132.5 mm x 482.6 mm x 708.3 mm)
Output Power	2400-24000 W
Number of Outputs	1-8
Number of Module Slots	8
Cooling	AIR (Liquid available mid 2016)
Input Range	180-528 VAC
Input Nominal	Supports Nominal Inputs Ranges: 200/208/220/230/240/380/480 VAC
Number of Phases	3 Phase (Wye or Delta) 4 wire total (3 Phase and 1 earth ground)
Frequency	47-440 Hz (Leakage and Medical approval rating 47-63 Hz only)
Phase Detection	Loss of Phase will inhibit unit off. Comms will continue with Phase Loss
Max Current/Phase	108 A @ 180 VAC
Undervoltage Detection	Nominal input locked on at turn-on. Undervoltage shutdown at 15% below nominal. Turn-on at 12% below nominal. Meets SEMI F47
Current Inrush	2.5 x Max input current
Power Factor	> 0.9 @ full load and Nominal Line
Harmonic Distortion	TBD
Line Interruption	Designed to meet SEMI F47-0706, 53,58,S14 at nominal input voltages
Input Leakage Current	< 5 mA (Fixed ground condition 3rd edition leakage = 5 mA)
ON/OFF switch	Front Panel Standby switch
Input Protection	Internal Fuse (Not User Serviceable)
Input Overvoltage Protection	Up to 125% of nominal input shall not damage unit
Phase Imbalance	≤ 5%
Rack Parallel	Up to 6 racks (144 KW) with master slave communication configuration

Safety

UL 60950-1 2 nd Edition
CSA C22.2 No. 60950-1-07, 2 nd Edition
EN60950-1
IEC60950-1/EN60950
EN60601-1
IEC60601-1
UL 60601-1 1st Edition; ANSI/AAMI ES60601-1 (2005 + C1:09 + A2:10) "3 rd Ed"
CAN/CSA-C22.2 No. 60601-1 (2008)
IEC60601
UL/CSA 61010 and IEC/EN 61010-1
CB Certificate and Report
CE (LVD+RoHS), EN60950-1
CQC

OUTPUT – General Specs

Parameter						
MODULE CODE	SL	SQ	SW	S8	S1	S2
# Outputs	1	1	1	1	1	1
Nominal O/P (V)	12.0 V	24.0 V	48.0 V	80.0 V	125.0 V	250.0 V
O/P Voltage Range (V)	0.12 V - 14.4 V	0.24 V - 28.8 V	0.48 V - 57.6 V	0.80 V - 96.0 V	1.25 V - 150.0 V	2.50 V - 300.0 V
Max Power (W)	2400 W	2880 W	3000 W	3000 W	3000 W	3000 W
O/P Current Range (A)	0.048 A - 200 A	0.096 A - 120 A	0.192 A - 62.5 A	0.32 A - 37.5 A	0.5A -24 A	1.0A -12 A
Power Density (W/cu-in)	32.5	39.0	40.6	40.6	40.6	40.6
Efficiency (%)	94	94	94	94	94	94
Module Input Voltage	400 V					
Module Operating Temp	-20 °C to +70 °C; Baseplate Temp TBD					
Series Operation	250 V modules can be connected in series up to 900 V for Medical and 1000 V above ground with no operation ON/OFF limitations					
Parallel Operation	Up to 8 modules can be paralleled in 1 rack, with up to 6 racks connected in parallel. Single Wire Parallel connection will be provided as part of configuration					

OUTPUT – Module in Constant Voltage Mode

Constant Voltage						
MODULE CODE	SL	SQ	SW	S8	S1	S2
Nominal Output (V)	12	24	48	80	125	250
Setting Range (V)	0.12 V - 14.4 V	0.24 V - 28.8 V	0.48 V - 57.6 V	0.80 V - 96.0 V	1.25 V - 150.0 V	2.50 V - 300.0 V
Low Frequency RMS Ripple (mV)	5	5	5	25	25	100
Line Regulation (mV)	12	24	48	80	125	250
Load Regulation (mV)	24	48	96	160	250	500
P-P Ripple (mV)	60	120	240	400	625	1250
Drift (Temp Stability)	±0.05% of I _{out} Rated over 8 hours, after 30 minute warm up, constant Line, Load and Temp					
Temp Coefficient (PPM/°C)	200					
Pgm Accuracy (mV)	0.05% digital; 0.5% analog of Nominal Output Voltage					
Pgm Resolution (mV)	TBD					
Meas Accuracy (mV)	0.2% + 0.2% of Nominal Output Voltage					
Meas Resolution	TBD					
Transient Response	Max 5.0% deviation from current set point must recover within 1mS for a 50% step load. Residual value 0.20%					
Current Sense Method	Internal Shunt					


OUTPUT – Module in Constant Current Mode

Constant Voltage						
MODULE CODE	SL	SQ	SW	S8	S1	S2
Nominal Output (V)	12	24	48	80	125	250
Setting Range (A)	0.0 A - 200 A	0.0 A - 120 A	0.0 A - 62.5 A	0.0 A - 37.5 A	0.0 A - 24 A	0.0 A - 12 A
RMS Ripple (mA)	100	60	31.3	18.8	12	6
Line Regulation (mA)	100	60	31.3	18.8	12	6
Load Regulation (mA)	400	240	125	75	48	24

OUTPUT – Module in Constant Current Mode

Constant Voltage						
P-P Ripple (mA)	N/A					
Drift (Temp Stability)	$\pm 0.05\%$ of I_{out} Rated over 8 hours, after 30 minute warm up, constant Line, Load and Temp					
Temp Coefficient (PPM/°C)	200					
Pgm Accuracy (A)	0.2% digital, 0.5% analog					
Pgm Resolution (mA)	39.6	13.2	6.6	5	2.6	1.3
Meas Accuracy	0.2% + 0.2% of Rated Output Max					
Meas Resolution	39.6	13.2	6.6	5	2.6	1.3
Transient Response	0-63% output current change in 7.5 mSec, residual value 1%, settling time 35 mSec					
Current Sense Method	Internal Shunt					

Ordering Information

CASE CODE		MODULE CODES (up to 8 modules)		PARALLEL/SERIES CASE CODE		MOD CODE
iHP**XYA-		XV-		-XX		-XXX
Case Decoder	iHP**XYA	Module Decoder	XV	Case Code Decoder First Digit	Case Code Decoder Second Digit	
** = Case Power		X = Output Type		0 = None	0 = None	
	24 = 24 KW 19" Rack		S = Single	1 = Slot 1&2	P = Parallel	
X = Voltage Range		V = Nominal Voltage		2 = Slot 2&3	S = Series	
	L = Low Range 180-264		L = 12 V	3 = Slot 3&4	1 = Combo 2 P/S	
	H = High Range 342-528		Q = 24 V	4 = Slot 4&5	2 = Combo 2 S/P	
Y = Input Phase			W = 48 V	5 = Slot 5&6	3 = Combo 3 P/P/P	
	3 = 3 Phase		8 = 80 V	6 = Slot 6&7	4 = Combo 3 P/P/S	
Z = Cooling			1 = 125 V	7 = Slot 7&8	5 = Combo 3 P/S/P	
	A = Air Cooled		2 = 250 V	8 = Slot 1,2&3	6 = Combo 3 P/S/S	
A = Accessory Options				9 = Slot 1,2,3&4	7 = Combo 3 S/P/P	
	Blank = Full control			A = Slot 1,2,3,4&5	8 = Combo 3 S/P/S	
				B = Slot 1,2,3,4,5&6	9 = Combo 4 P/P/P/P	
				C = Slot 1,2,3,4,5,6&7	A = Combo 4 P/P/P/S	
				D = Slot 1,2,3,4,5,6,7&8	B = Combo 4 P/P/S/P	
				E = Slot 1&2; 3&4	C = Combo 4 P/P/S/S	
				F = Slot 1&2; 3&4; 5&6	D = Combo 4 P/S/P/P	
				G = Slot 1&2; 3&4; 5&6; 7&8	E = Combo 4 P/S/P/S	
				H = Slot 1,2&3; 4&5	F = Combo 4 P/S/S/P	
				J = Slot 1,2&3; 4&5; 6&7	G = Combo 4 P/S/S/S	
				K = Slot 1,2&3; 4,5&6	H = Combo 4 S/P/P/P	
				L = Slot 1,2&3; 4,5&6; 7&8	J = Combo 4 S/P/P/S	
				M = Slot 1,2,4&4; 5&6	K = Combo 4 S/P/S/P	
				N = Slot 1,2,3&4; 5&6; 7&8	L = Combo 4 S/P/S/S	
				P = Slot 1,2,3&4; 5,6&7	M = Combo 4 S/S/P/P	
				R = Slot 1,2,3&4; 5,6,7&8	N = Combo 4 S/S/P/S	
				S = Slot 1,2,3,4&5; 6&7	R = Combo 4 S/S/S/P	
				T = Slot 1,2,3,4&5; 6,7&8	T = Combo 4 S/S/S/S	
				U = Slot 1,2,3,4,5&6; 7&8		

For complete product specifications, technical reference notes and available product options, go to www.Artesyn.com/power

LCB35-150

Bulk front end

35-150 Watts

Total Power: 35-150 W
of Outputs: Single
Output: 3.3 to 48 V

NEW!



Special Features

- Low Cost
- -25 °C to 70 °C with derating
- LCB35/LCB50 = 3.9" x 3.2" x 1.4"
- LCB100 = 5.1" x 3.9" x 1.5"
- LCB150 = 3.9" x 7" x 1.5"
- High Efficiency: 90% @ 230 VAC
- ±10% adjustment range
- EMI Class B
- EN61000 Immunity
- RoHS 2
- Withstand 5G vibration test (2G on LCB150)

Electrical Specifications

Input	
Input range	88 - 264 Vac (Operating) (125-374 Vdc) 115/230 Vac (Nominal) TERMINAL BLOCK (by switch on LCB150)
Frequency	47 - 63 Hz, Nominal 50/60
Inrush current	≤ 50 A peak, cold start at LCB150
Harmonics	Meets IEC 1000-3-2 requirements
Input current	5 Arms max input current, at LCB150
Hold up time	25 ms minimum for Main O/P, at full rated load @ LCB150
Efficiency	90% typical at full Load/230 Vac nominal
Leakage current	< 2 mA at 264 Vac
Isolation	PRI-Chassis 1500 Vdc Basic PRI-SEC 3000 Vac SEC-Chassis 500 Vdc

Environmental Specifications

Operating temperature	-25 °C to +70 °C, linear derating to 50% from 50 °C to 70 °C
Storage temperature	-40 °C to +85 °C
Humidity	20 to 90%, non-condensing. Operating. conformal coat option available
Vibration	10-500 Hz, 5G 10 min/1 cycle, period for 60 min each along X, Y, Z axes (2G on LCB150)

Safety

UL, CVL	60950-1
TUV	60950-1
CE	

Electrical Specifications

Output		
Output rating	See ordering information table below	88-264 Vac
Set point	±0.5%	88-264 Vac
Total regulation range	Main output 0.5 - 2%	Combined line/load/transient when measured at output terminal
Minimum load	Main output @ 0.0 A	No loss of regulation
Output noise (PARD)	200 mVp-p	Main output Measured with a 0.1 µF ceramic and 10 µF tantalum capacitor on any output, 20 MHz
Output voltage overshoot	—	No overshoot/undershoot outside the regulation band during on or off cycle
Short circuit protection	Protection against damage	Bounce mode
Output isolation	—	Standard per safety requirements
Overload protection (OCP)	> 110%	Main output
Overvoltage protection (OVP)	115% to 150%	Main output

Ordering Information

Model Number	Output Voltage	Output Current	Vo Adjust	Output Power	Efficiency
LCB35D	3.3 V	7 A	±10%	23.1 W	78%
LCB35E	5 V	7 A	±10%	35 W	83%
LCB35L	12 V	3 A	±10%	36 W	89%
LCB35N	15 V	2.4 A	±10%	36 W	89%
LCB35Q	24 V	1.5 A	±10%	36 W	88%
LCB35W	48 V	0.8 A	±10%	38.4 W	90%
LCB50D	3.3 V	10 A	±10%	33 W	78%
LCB50E	5 V	10 A	±10%	50 W	83%
LCB50L	12 V	4.2 A	±10%	50.4 W	88%
LCB50N	15 V	3.4 A	±10%	51 W	89%
LCB50Q	24 V	2.2 A	±10%	52.8 W	90%
LCB50W	48 V	1.1 A	±10%	52.8 W	90%
LCB100D	3.3 V	20 A	±10%	66 W	79%
LCB100E	5 V	16 A	±10%	80 W	83%
LCB100L	12 V	8.5 A	±10%	102 W	86%
LCB100N	15 V	7 A	±10%	105 W	88%
LCB100Q	24 V	4.5 A	±10%	108 W	88%
LCB100W	48 V	2.3 A	±10%	110 W	89%
LCB150E	5 V	18 A	±10%	90 W	83%
LCB150L	12 V	12.5 A	±10%	150 W	88%
LCB150N	15 V	10 A	±10%	150 W	89%
LCB150Q	24 V	6.5 A	±10%	156 W	90%
LCB150W	48 V	3.3 A	±10%	158.4 W	90%



For complete product specifications, technical reference notes and available product options, go to www.Artesyn.com/power

LCM300

Bulk front end

300 Watts

Total Power: 300 W (350 W some models)
 # of Outputs: Single
 Output: 12 to 60 V
 Optional 5.0 V standby

NEW!



Special Features

- 300 W (350 W some models)
- Low Cost
- 1.61" x 4.0" x 7.0"
- 7.1 Watts Per Cubic Inch
- Industrial/Medical Safety
- -40 °C to 70 °C with derating
- Optional 5 V @ 2 A Housekeeping
- High Efficiency: 91% @ 230 VAC
- Variable speed "Smart Fans"
- DSP controlled
- PMBus Compliant
- Conformal coat option
- $\pm 20\%$ adjustment range
- Margin programming (300W and 600W models)
- OR-ing FET
- EMI Class B
- EN61000 Immunity
- RoHS 2
- Optional battery charging current profile

Electrical Specifications

Input	
Input range	90 - 264 Vac (Operating) (127-374 Vdc) 115/230 Vac (Nominal) TERMINAL BLOCK
Frequency	47 - 63 Hz, Nominal 50/60
Input fusing	Internal 8 A fuses, both lines fused
Inrush current	≤ 20 A peak, either hot or cold start
Power factor	0.98 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input current	5 Arms max input current, at 90 Vac
Hold up time	20 ms minimum for Main O/P, at full rated load
Efficiency	> 91% typical at full Load/230 Vac nominal
Leakage current	< 0.3 mA at 264 Vac
ON/OFF power switch	N/A
Power line transient	MOV directly after the fuse
Isolation	PRI-Chassis 2500 Vdc Basic PRI-SEC 4000 Vac Reinforced 2xMOPP SEC-Chassis 500 Vdc

Environmental Specifications

Operating temperature	-40 °C to +70 °C, linear derating to 50% from 50 °C to 70 °C
Storage temperature	-40 °C to +85 °C
Humidity	20 to 90%, non-condensing. Operating. conformal coat option available
Fan noise	< 45 dBA, 80% load at 40 °C; fan off when unit is inhibited
Altitude	Operating - 16,405 feet (3000m) Storage - 30,000 feet
Shock	MIL-STD-810F 516.5, Procedure I, VI. storage
Vibration	MIL-STD-810F 514.5, Cat. 4, 10. storage

Safety

UL	60950-1 508/1598/1433 60601-1 Ed 3
CSA	60950-1
VDE	60950-1 60601
China	CCC
CB Scheme	Report/Cert

Electrical Specifications

Output		
Output rating	See ordering information table below	90-264 Vac
Set point	$\pm 0.5\%$	90-264 Vac
Total regulation range	Main output $\pm 2\%$ 5 Vsb $\pm 1\%$	Combined line/load/transient when measured at output terminal
Rated load	310 W maximum	Derate linear to 50% from 50 °C to 70 °C
Minimum load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output noise (PARD)	1% max p-p 50 mV max p-p	Main output 5 Vsb output Measured with a 0.1 μ F ceramic and 10 μ F tantalum capacitor on any output, 20 MHz
Output voltage overshoot	—	No overshoot/undershoot outside the regulation band during on or off cycle
Transient response	< 300 μ s	50% load step @ 1 A/ μ s Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max units in parallel	—	Up to 10
Short circuit protection	Protection against damage	Bounce mode
Remote sense	—	Compensation up to 500 mV
Output isolation	—	Standard per safety requirements
Forced load sharing	To within 10% of all shared outputs	Analog sharing control
Overload protection (OCP)	105% to 125% 120% to 170%	Main output 5 Vsb output. Constant current or hiccup mode (software selectable)
Overvoltage protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Overtemp protection	10-15 °C above safe operating area	Both PFC and output converter monitored

Ordering Information

Model Number*	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current		Output Ripple P/P (0-50 °C)	Max Continuous Power	Combined Line/ Load Regulation
					Min	Max			
LCM300L	12 V	12 V	$\pm 0.5\%$	$\pm 0.5\%$	0 A	25 A	120 mV	310	2%
LCM300N	15 V	15 V	$\pm 0.5\%$	$\pm 0.5\%$	0 A	20 A	150 mV	310	2%
LCM300Q	24 V	24 V	$\pm 0.5\%$	$\pm 0.5\%$	0 A	12.5 A	240 mV	310	2%
LCM300U	36 V	36 V	$\pm 0.5\%$	$\pm 0.5\%$	0 A	8.4 A	360 mV	310	2%
LCM300W	48 V	48 V	$\pm 0.5\%$	$\pm 0.5\%$	0 A	6.3 A	480 mV	310	2%

* For option codes, see Data Sheet

LCM600

Bulk front end

600 Watts

NEW!

Total Power: 600 Watts
of Outputs: Single
Output: 9.6-60 V
Optional 5.0 V standby



Special Features

- 600 W output power
- Low cost
- 2.4" x 4.5" x 7.5"
- 7.41 W/cu-in
- 5 V SELV standby (housekeeping)
- Industrial/Medical safety
- -40 °C to 70 °C with derating
- 5 V housekeeping
- High efficiency: 89% typical
- Variable speed "Smart Fans"
- DSP controlled front end
- Conformal coat option
- ±20% adjustment range
- Margin programming
- OR-ing FET option
- Terminal block input option

Electrical Specifications

Input	
Input range	85-264 Vac (Operating) 115/230 Vac (Nominal) Input through standard IEC connector
Frequency	47-440 Hz, Nominal 50/60
Input fusing	Internal 10 A fuses, both lines fused
Inrush current	≤ 25 A peak, either hot or cold start
Power factor	0.99 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input current	8 A RMS max input current, at 100 Vac
Hold up time	20 ms minimum for Main O/P, at full rated load
Efficiency	> 88% at full load
Leakage current	< 0.3 mA at 264 Vac
ON/OFF power switch	N/A
Power line transient	MOV directly after the fuse



Environmental Specifications

Operating temperature	-40 °C to +70 °C, linear derating to 50% from 50 °C to 70 °C
Storage temperature	-40 °C to 85 °C
Humidity	20 to 90%, non-condensing. Operating. Conformal coat option available
Fan noise	< 45 dBA, 80% load at 30 °C
Altitude	Operating: Up to 15,000 feet above sea level Storage: Up to 30,000 feet above sea level
Shock	MIL-STD-810F 516.5, Procedure I, VI. Storage
Vibration	MIL-STD-810F 514.5, Cat. 4, 10. Storage

Safety

UL	60950-1 508/1598/1433 60601-1
CSA	60950-1
VDE	60950-1 60601
China	CCC
CB Scheme	Report/Cert

Electrical Specifications

Output		
Output rating	See ordering information table below	85-264 Vac
Set point	±0.5%	85-264 Vac
Total regulation range	Main output ±2% 5 Vsb ±1%	Combined line/load/transient when measured at output terminal
Rated load	600 W maximum	Derate linear to 50% from 50 °C to 70 °C
Minimum load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output noise (PARD)	1% max p-p 50 mV max p-p	Main output 5 Vsb output Measured with a 0.1 µF ceramic and 10 µF tantalum capacitor on any output, 20 MHz
Output voltage overshoot	—	No overshoot/undershoot outside the regulation band during on or off cycle
Transient response	< 300 µs	50% load step @ 1 A/µs Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max units in parallel	—	Up to 10
Short circuit protection	Protection against damage	Bounce mode
Remote sense	—	Compensation up to 500 mV
Output isolation	—	Standard per safety requirements
Forced load sharing	To within 10% of all shared outputs	Analog sharing control
Overload protection (OCP)	105% to 125% 120% to 170%	Main output 5 Vsb output. Constant current or bounce mode option through software
Overvoltage protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Overtemp protection	10-15 °C above safe operating area	Both PFC and output converter monitored

Ordering Information

Model Number*	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current		Output Ripple P/P (0-50 °C)	Combined Line/ Load Regulation
					Min	Max		
LCM600L	12 V	12 V	±0.5%	9.6–14.4 V	0 A	54 A	120 mV	2%
LCM600N	15 V	15 V	±0.5%	12.0–19.5 V	0 A	44 A	150 mV	2%
LCM600Q	24 V	24 V	±0.5%	19.2–28.8 V	0 A	27 A	240 mV	2%
LCM600U	36 V	36 V	±0.5%	28.8–43.2 V	0 A	16.7 A	360 mV	2%
LCM600W	48 V	48 V	±0.5%	38.4–57.6 V	0 A	14 A	480 mV	2%

* For option codes, see Data Sheet

LCM1000

Bulk front end

1000 Watts

NEW!

Total Power: 1000 W
of Outputs: Single
Output: 12 to 48 V
Optional 5.0 V standby



Special Features

- 1000 W output power
- Low cost
- 2.5" x 5.2" x 10.0"
- 7.7 Watts per cubic inch
- Industrial/Medical safety
- -40 °C to 70 °C with derating
- Optional 5 V @ 2 A housekeeping
- High efficiency: 90% typical
- Variable speed "Smart Fans"
- DSP controlled
- Conformal coat option
- ±10% adjustment range
- Margin programming
- OR-ing FET
- Low acoustic noise

Electrical Specifications

Input	
Input range	90 - 264 Vac (Operating) 115/230 Vac (Nominal) TERMINAL BLOCK
Frequency	47 - 440 Hz, Nominal 50/60
Input fusing	Internal 20 A fuses, both lines fused
Inrush current	≤ 25 A peak, either hot or cold start
Power factor	0.99 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input current	12 A RMS max input current, at 100 Vac
Hold up time	20 ms minimum for Main O/P, at full rated load
Efficiency	> 90% typical at full load / 230 Vac nominal
Leakage current	< 0.4 mA at 264 Vac
ON/OFF power switch	N/A
Power line transient	MOV directly after the fuse
Isolation	PRI-Chassis 2500 Vdc Basic PRI-SEC 4000 VAC Reinforced 2xMOPP SEC-Chassis 500 Vdc

Environmental Specifications

Operating temperature	-40 °C to +70 °C, linear derating to 75% from 60 °C to 70 °C
Storage temperature	-40 °C to +85 °C
Humidity	20 to 90%, non-condensing. Operating. Conformal coat option available
Fan noise	< 45 dBA, 100% load at 30 °C
Altitude	Operating - 16,405 feet (5,000 m) Storage - 30,000 feet
Shock	MIL-STD-810F 516.5, Procedure I, VI. Storage
Vibration	MIL-STD-810F 514.5, Cat. 4, 10. Storage

Safety

ULcUL Recognized ITE (UL60950-1)
ULcUL Recognized Medical (ANSI/AAMI ES60601-1)
TUV-SuD ITE + Medical (EN60950-1 and EN60601-1)
CE LVD (EN60950-1 + ROHS)
BSMI
CB Report
- through Demko for IEC60950-1
- through TUV-SuD for IEC60601-1
CCC Approval

Electrical Specifications

Output		
Output rating	See table 1	90-264 Vac
Set point	±0.5%	90-264 Vac
Total regulation range	Main output ±2% 5 Vsb ±1%	Combined line/load/transient when measured at output terminal
Rated load	1000 W maximum	Derate linear to 50% from 50 °C to 70 °C
Minimum load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output noise (PARD)	1% max p-p 50 mV max p-p	Main output 5 Vsb output Measured with a 0.1 µF Ceramic and 10 µF Tantalum Capacitor on any output, 20 MHz
Output voltage overshoot	—	No overshoot/undershoot outside the regulation band during on or off cycle
Transient response	< 300 µSec	50% load step @ 1 A/µs Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max units in parallel	—	Up to 10
Short circuit protection	Protected, no damage to occur	Bounce mode
Remote sense	—	Compensation up to 500 mV
Output isolation	—	Standard per safety requirements
Forced load sharing	To within 10% of all shared outputs	Analog sharing control
Overload protection (OCP)	105% to 125% 120% to 170%	Main output 5 Vsb output
Overvoltage protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Overtemp protection	10 - 15 °C above safe operating area	Both PFC and output converter monitored

Ordering Information

Model Number*	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current Min	Current Max	Output Ripple P/P (0-50 °C)	Max Continuous Power	Combined Line/Load Regulation
LCM1000L	12 V	12 V	±0.5%	10.8 – 13.2 V	0 A	83.3 A	120 mV	1000 W	2%
LCM1000N	15 V	15 V	±0.5%	13.5 – 16.5 V	0 A	66.7 A	150 mV	1000 W	2%
LCM1000Q	24 V	24 V	±0.5%	21.6 – 26.4 V	0 A	41.7 A	240 mV	1000 W	2%
LCM1000U	36 V	36 V	±0.5%	32.4 – 39.6 V	0 A	27.8 A	360 mV	1000 W	2%
LCM1000W	48 V	48 V	±0.5%	43.2 – 52.8 V	0 A	20.8 A	480 mV	1000 W	2%

* For option codes, see Data Sheet

LCM1500

Bulk front end

1500 Watts

Total Power: 1500 W
of Outputs: Single
Output: 12 to 60 V
Optional 5.0 V standby

NEW!



Special Features

- 1500 W output power
- Low Cost
- 2.5" x 5.2" x 10.0"
- 12 Watts Per Cubic Inch
- Industrial/Medical safety
- -40 °C to 70 °C with derating
- Optional 5 V @ 2 A Housekeeping
- High Efficiency: 89% typical
- Variable speed "Smart Fans"
- DSP controlled
- Conformal coat option
- $\pm 10\%$ adjustment range
- Margin programming
- OR-ing FET
- Change to EMI Class A
- EN61000 Immunity
- RoHS 2
- PMBUS

Electrical Specifications

Input	
Input range	90 - 264 Vac (Operating) 115/230 Vac (Nominal) TERMINAL BLOCK
Frequency	47 - 440 Hz, Nominal 50/60
Input fusing	Internal 20 A fuses, both lines fused
Inrush current	≤ 25 A peak, either hot or cold start
Power factor	0.99 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input current	18 Arms max input current, at 100 Vac
Hold up time	20 ms minimum for Main O/P, at full rated load
Efficiency	> 91% typical at full Load/230 Vac nominal
Leakage current	< 0.3 mA at 264 Vac
ON/OFF power switch	N/A
Power line transient	MOV directly after the fuse
Isolation	PRI-Chassis 2500 Vdc Basic PRI-SEC 2500 Vdc Reinforced SEC-Chassis 500 Vdc

Environmental Specifications

Operating temperature	-40 °C to +70 °C, linear derating to 50% from 50 °C to 70 °C
Storage temperature	-40 °C to +85 °C
Humidity	20 to 90%, non-condensing. Operating. Conformal coat option available
Fan noise	< 45 dBA, 80% load at 30 °C
Altitude	Operating - 16,405 feet (3000m) Storage - 30,000 feet
Shock	MIL-STD-810F 516.5, Procedure I, VI. Storage
Vibration	MIL-STD-810F 514.5, Cat. 4, 10. Storage

Safety

UL	60950-1 508/1598/1433 60601-1 Ed 3
CSA	60950-1
VDE	60950-1 60601
CB Scheme	Report/Cert

Electrical Specifications

Output		
Output rating	See ordering information table below	90-264 Vac
Set point	±0.5%	90-264 Vac
Total regulation range	Main output ±2% 5 Vsb ±1%	Combined line/load/transient when measured at output terminal
Rated load	1500 W maximum	Derate linear to 50% from 50 °C to 70 °C
Minimum load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output noise (PARD)	1% max p-p 50 mV max p-p	Main output 5 Vsb output Measured with a 0.1 µF ceramic and 10 µF tantalum capacitor on any output, 20 MHz
Output voltage overshoot	—	No overshoot/undershoot outside the regulation band during on or off cycle
Transient response	< 300 µs	50% load step @ 1 A/µs Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max units in parallel	—	Up to 10
Short circuit protection	Protection against damage	Bounce mode
Remote sense	—	Compensation up to 500 mV
Output isolation	—	Standard per safety requirements
Forced load sharing	To within 10% of all shared outputs	Analog sharing control
Overload protection (OCP)	105% to 125% 120% to 170%	Main output 5 Vsb output. Constant current or bounce mode option through software.
Overvoltage protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Overtemp protection	10-15 °C above safe operating area	Both PFC and output converter monitored

Ordering Information

Model Number*	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current Min	Current Max	Output Ripple P/P (0-50 °C)	Max Continuous Power	Combined Line/Load Regulation
LCM1500L	12 V	12 V	±0.5%	10.8–13.2 V	0 A	133 A	120 mV	1500	2%
LCM1500N	15 V	15 V	±0.5%	13.5–16.5 V	0 A	100 A	150 mV	1500	2%
LCM1500Q	24 V	24 V	±0.5%	21.6–26.4 V	0 A	67 A	240 mV	1500	2%
LCM1500R	28 V	28 V	±0.5%	25.2–30.8 V	0 A	53.6 A	280 mV	1500	2%
LCM1500U	36 V	36 V	±0.5%	32.4–39.6 V	0 A	43 A	360 mV	1500	2%
LCM1500W	48 V	48 V	±0.5%	43.2–52.8 V	0 A	33 A	480 mV	1500	2%

* For option codes, see Data Sheet

HPS & UFE

Distributed power bulk front end

3000-12000 Watts

Special Features

- EN61000-3-2 harmonic compliance
- Built-in EMI filter
- Low output ripple
- +5 V standby output
- Built-in cooling fans
- N + 1 redundant
- Overcurrent protection
- Overvoltage protection
- Overtemperature protection
- Built-in OR-ing diodes
- Active power factor correction



HPS3000

Voltage Availability

Model	HPS3000	UFE
Wattage	3000 W ³	2000 W ⁴
Input Voltage	90-140 Vac 180-264 Vac	90-265 Vac
Available Standard Output Voltages (order code) ¹		
12 (L)		
24 (Q)		●
28 (R)		●
30 (S)		
48 (W)	●	●
54 (X)		●
60 (Y)		
Available Options	See Note 1	
Corresponding Rack	See Note 2	UFR6000J

Notes: 1 = Consult factory for other output voltages and options

2 = Comes with optional I²C interface

3 = 3000 W @ 180-264 Vac; 1500 W @ 90-140 Vac

4 = 2000 W @ 48 V; 1300 W @ 24 V

HPS3000 Electrical Specifications

Input	
Input range (operating)	180-264 Vac 90-140 Vac
Input range (nominal)	200 Vac 110 Vac
Frequency	43-63 Hz
Input fusing	Internal 25 A fuses (both lines fused)
Inrush current	≤ 40 A peak (either hot or cold start)
Power factor	0.97 typical (Meets EN61000-3-2)
Harmonics	Meets IEC 1000-3-2 requirements @ 50% load
Input current	19 A max input current
Holdup time	10 ms min @ full rated load
Leakage current	1.4 mA @ 240 Vac
Power line transient	MOV directly after the fuse

Environmental Specifications

HPS3000	
Operating temp.	-10 °C to 40 °C
Storage temp.	-40 °C to 85 °C
Cooling	External fans with Fan Fail and Fan Speed control
Humidity	Operating/Storage: 5-95% non-condensing
Altitude	Operating: Up to 10,000 feet above sea level Storage: Up to 30,000 feet above sea level
Vibration/Shock	Non-operational 5G Sine sweep from 5-500 Hz, dwelling at resonant frequencies for one hour each
RoHS compliant	Yes

Safety

UL	UL60950 (UL recognized)
NEMKO	EN60950
TÜV	EN60950
CE	Mark
CB	Report



HPR12K



Output

Output rating	48 V @ 62.0 A (180-264 Vac) 5 Vsb @ 3.0 A 48 V @ 29.4 A (90-140 Vac) 5 V @ 3 A
Set point	-4% to +17% through I ² C
Total regulation range	48 V \pm 10%; 5 Vsb \pm 4% (line/load/transient when measured at output connection)
Rated load	3000 W maximum @ 200 Vac Input 1500 W maximum @ 110 Vac Input (no derating over operating temperature range)
Minimum load	48 V @ 0.0 A; 5 Vsb @ 0.0 A with no loss of regulation
Output noise	480 mV max P-P for 48 V output 100 mV max P-P for 5 Vsb output Measured with a 0.1F Ceramic and 10 F Tantalum capacitor on any input
Output voltage overshoot	\pm 5% maximum of nominal voltage setting
Transient response	5% maximum deviation (50% load step @ 1 A/ μ s. Step load valid between 10-100% of output rating)
Max units in parallel	Up to 4 (total power in 1U 19" rack is 12 KW)
Short circuit protection	120-130% of rated output (output to return)
Forced load sharing	Within 10% of all shared outputs (digital sharing control)
Overcurrent protection (OCP)	120-130% for 48 V output 100-125% for 5 Vsb output
Overvoltage protection (OVP)	110-120% for 48 V output 110-125% for 5 Vsb output
Overtemperature protection	10 °C to 15 °C above safe operating area. (Both PFC and output converter monitored. 5 Vsb will operate under overtemperature condition. Built-in hysteresis.)

Rack Ordering Information

Module	UFE1300/2000	HPS3000
Rack #	UFR6000	HPR12K
# of Slots	3	4
Total Power	6000 W	12000 W

** See website for option codes on HPR racks.

Ordering Information

HPS3000-9-001	High airflow performance	HPR120K-00-001
HPS3000-9	Standard fans	HPR12K-00

UFE1300/2000 Electrical Specifications

Input	
Input range (operating)	88-264 Vac 176-264 Vac
Input range (nominal)	120 Vac 240 Vac
Frequency	47-63 Hz
Input fusing	30 A (both lines fused)
Power factor	0.98 (50-100% load)
Input current	15 A max.
Leakage current	2 mA max.
Undervoltage lockout (power up)	176 Vac max. (high line range) 88 Vac max. (wide range)
Undervoltage lockout (power down)	162 Vac min. (high line range) 76 Vac min. (wide range)



Output	
Output rating - Main output	48 V 2000 W (high line range) 48 V 1300 W (wide range) 24 V 1300 W (all ranges)
Output rating - Auxiliary output	11 V $\pm 15\%$, 2.875 W
Line regulation	$\pm 0.15\%$ max.
Load regulation	$\pm 0.15\%$ max.
Turn-on delay	5.0 seconds max.
Ambient temp. coefficient	$\pm 0.005\%/^{\circ}\text{C}$
Voltage adjustability (via PMBus)	48 V 42-57 Vdc 24 V 21-28.5 Vdc
Output setpoint accuracy	$\pm 0.5\%$
Default output voltage (@ 25 $^{\circ}\text{C}$)	48 V $\pm 0.5\%$ @ 41 A 27 V $\pm 0.5\%$ @ 48 A
Total error band	$\pm 1.0\%$ max.
Overshoot/undershoot	0%
Ripple and noise (20 MHz)	500 mV pk-pk, 150 mV rms
Dynamic regulation (except droop mode)	2.5% max., recovery in 1 ms max.
Current sharing	15% max.
Electrical insulation	4242 Vdc input/output
Switching frequency	450 kHz fixed
Power limit	115%
Current limit	108% typical
Short-circuit	200 ms on; 1/8 second off
Overvoltage	60 V/32 V
Overtemperature	Non-latching

Ordering Information

Rated Output Power	Output Voltage Vout		Output Current (Min)	Power Limit + 15% / -0% Vout (min)	Line Range at Turn On (Auto Ranging)	Operating Line Range	Current Limit (Vout) < Vout (min)	Model Numbers	Order Number
	Min	Max							
24 Vout Models									
1300 W	21 V	28.5 V	0 A	1300 W	90-264 Vac	65 A	65 A	UFE1300-96S24PJ	UFE1300-5
48 Vout Models									
1300 W	42 V	57 V	0 A	1300 W	90-264 Vac	33 A	33 A	UFE2000-96S48PJ	UFE2000-9
2000 W	42 V	57 V	0 A	2000 W	180-264 Vac	52 A	52 A		
1300 W	42 V	57 V	0 A	1300 W	90-264 Vac	33 A	33 A	UFE2000-96S48PDJ	UFE2000-9-HD
2000 W	42 V	57 V	0 A	2000 W	180-264 Vac	52 A	52 A		
1300 W	42 V	57 V	0 A	1300 W	90-264 Vac	33 A	33 A	UFE2000-96S48PHDJ	UFE2000-9-D
2000 W	42 V	57 V	0 A	2000 W	180-264 Vac	52 A	52 A		

Product Family	Rated Output Power	Input Range	Standard Compliance	Type of Output	Output Voltage	Communications Type	Option Code	Special Modification	RoHS Compliance
UFE	2000	9	6	S	48	P	D	xx	J
UFE = Universal Front-End	1300 = 1300 Watts 2000 = 2000 Watts	9 = Universal Input with PFC	6 = UL/CSA/VDE Class A/B	S = Single	48 = 48 V 24 = 24 V	P = PMBus serial communications	None = Active Ishare D = Droop Ishare HD = PS Enable HI/Droop		J = Pb free (RoHS 6/6 compliant)

Distributed Power Systems (DS)

AC and DC inputs available

250-3000 Watts



DS450DC/DS2900

Special Features

- Active power factor correction
- EN61000-3-2 harmonic compliance
- Active AC inrush control
- High density
- Outputs +12 Vdc with some +48 Vdc models available
- 3.3 Vdc standby
- 12.0 Vdc standby on some models
- Options for 5 V standby voltage
- No minimum load required
- Hot plug operation
- N+1 redundant
- Internal OR-ing FETs
- Active current sharing
- Built-in cooling fans
- I²C Interface with EEPROM for FRU data
- Internal fan speed control with fan fail signal
- DC Input
- DSR1 rack for DS650/850. Ordering part number is 73-762-002. Standard 19" 1U fits up to 5 modules (4250 Watts)
- Options for reverse airflow
- Platinum Plus efficiency on some models

Voltage Availability

Model	12 V	24 V	48 V	PMBus
	(-3)	(-5)	(-9)	
DS250SPE	●			
DS450	●			
DS450DC	●			
DS460S	●			●
DS460SDC	●			●
DS500SDC	●			
DS500SPE	●			
DS550	●			
DS550DC	●			
DS650	●	●	●	
DS650DC	●			
DS750PED	●			
DS760SL	●			
DS800SL	●			●
DS850	●	●	●	
DS850DC	●			
DS1050	●			●
DS1100PED	●			
DS1100SDC	●			
DS1100SLPE	●			
DS1100TDC-3	●			
DS1200	●			●
DS1200DC	●			●
DS1600SPE	●			
DS2000	●			●
DS2000SPE	●			
DS2500PE	●			
DS2700DC	●			
DS2900	●			●
DS3000PE	●			

Notes: ● Available



Safety

UL	UL60950 (UL recognized)
NEMKO	EN60950
TÜV	EN60950
CE	Mark
CB	Report

For complete product specifications, technical reference notes and available product options, go to www.Artesyn.com/power



DS460



DS500

Electrical Specifications

NEW!

NEW!

	DS250SPE-3	DS450-3	DS450DC-3	DS460S-3	DS460SDC	DS500SDC-3	DS500SPE-3
Input							
Input Range	90-264Vac	90-264 Vac	40-72 Vdc	90-264 Vac	40-72 Vdc	-36 to -72 Vdc	90-264 Vac
Frequency	47-63 Hz	47-63 Hz	DC	47-63 Hz	DC	N/A	47-63 Hz
Efficiency	90% Typ	80% Typ	80% Typ	92% Typ	92% Typ	90% Typ	94% Typ
EMI/RFI	Class A	Class B	N/A	Class B	N/A	Class A	Class A
Leakage Current	1.75mA	1.4 mA @ 240 V	N/A	1.0 mA @ 240 V	N/A	N/A	1.75 mA @ 240 V
Outputs							
Output Main	12 V / 20.8 A	12 V / 37 A	12 V / 37 A	12 V / 38.2 A	12 V / 38.2 A	12 V / 41.6 A	12 V / 41.6 A
Output Stand-By	12 V / 3.0 A	3.3 Vsb / 3 A	3.3 Vsb / 3 A	12 Vsb / 2.5 A	12 Vsb / 2.5 A	12 V / 3.0 A	12 V / 4.5 A
OCP/OVP/OTP	YES	YES	YES	YES	YES	YES	YES
I ² C Control	YES	YES	YES	YES	YES	YES	YES
Environmental							
Operating Temp	0°C to 50°C	-10 °C to 50 °C	-10 °C to 50 °C	-10 °C to 50 °C	-10 °C to 50 °C	0 °C to 50 °C	0 °C to 50 °C
Derating	N/A	N/A	N/A	N/A	N/A	N/A	50 °C to 70 °C
Storage	-40°C to 70°C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to 70 °C	-40 °C to +85 °C
RoHS Compliant	Yes	YES	YES	YES	YES	Yes	YES
MTBF	>200k hours	300K Hours	500K Hours	500K Hours	500K Hours	> 500K hours	500K Hours
Other							
Size (inch)	1.57 x 3.39 x 7.75	1.57 x 3.07 x 11.05	1.57 x 3.07 x 11.05	1.57 x 3.4 x 7.75	1.57 x 3.4 x 7.75	1.57 x 3.39 x 7.73	1.57 x 3.39 x 7.73
Size (mm)	42 x 86.3 x 196.5	40 x 78 x 280	40 x 78 x 280	40 x 86.4 x 197	40 x 86.4 x 197	40 x 86.3 x 196.5	40 x 86.3 x 196.5
Power Density	6.1	8.42	8.42	11.12	11.12	12.2	12.15
Cubic Inches	41.14	53.42	53.42	41.37	41.37	41.14	41.14
Pro-E Files	Yes	NO	YES	YES	YES	YES	YES
Thermal Data	Yes	YES	YES	YES	YES	YES	YES
PQ Airflow Curves	Yes	YES	YES	YES	YES	YES	YES
Warranty	Two years	Two Years	Two Years	Two Years	Two Years	Two Years	Two Years
Ordering Codes							
Standard	DS250SPE-3	DS450-3	DS450DC-3	DS460S-3-002 DS460S-3-004 (CCC 5,000m altitude)	DS460SDC-3	DS500SDC-3	DS500SPE-3
ALT Standby		DS450-3-001					
Reverse Air	DS250SPE-3-001	DS450-3-002	DS450DC-3-002	DS460S-3-003 DS460S-3-005 (CCC 5,000m altitude)	DS460SDC-3-001	DS500SDC-3-001	DS500SPE-3-001



DS550DC



DS650/DS850

	DS550-3	DS550DC-3	DS650-3	DS650-5	DS650-9	DS650DC-3
Input						
Input Range	90-264 Vac	40-72 Vdc	90-264 Vac	90-264 Vac	90-264 Vac	40-72 Vdc
Frequency	47-63 Hz	DC	47-63 Hz	47-63 Hz	47-63 Hz	DC
Efficiency	80% Typ	80% Typ	80% Typ	80% Typ	82% Typ	80% Typ
EMI/RFI	Class B	N/A	Class B	Class B	Class B	N/A
Leakage Current	1.4 mA @ 240 V	N/A	1.4 mA @ 240 V	1.4 mA @ 240 V	1.4 mA @ 240 V	N/A
Outputs						
Output Main	12 V / 45 A	12 V / 45 A	12 V / 52.5 A	24 V / 26.3 A	48 V / 13.1 A	12 V / 52.5 A
Output Stand-By	3.3 Vsb / 3 A	3.3 Vsb / 3 A	3.3 Vsb / 6 A	3.3 Vsb / 6 A	3.3 Vsb / 6 A	3.3 Vsb / 6 A
OCP/OVP/OTP	YES	YES	YES	YES	YES	YES
I ² C Control	YES	YES	YES	YES	YES	YES
Environmental						
Operating Temp	-10 °C to 50 °C	-10 °C to 50 °C	-10 °C to 50 °C	-10 °C to 50 °C	-10 °C to 50 °C	-10 °C to 50 °C
Derating	N/A	N/A	50% at 70 °C	50% at 70 °C	50% at 70 °C	50% at 70 °C
Storage	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
RoHS Compliant	YES	YES	YES	YES	YES	YES
MTBF	300K Hours	500K Hours	500K Hours	500K Hours	500K Hours	500K Hours
Other						
Size (inch)	1.57 x 3.07 x 11.05	1.57 x 3.07 x 11.05	1.57 x 3.20 x 11.00	1.57 x 3.20 x 11.00	1.57 x 3.20 x 11.00	1.57 x 3.20 x 11.00
Size (mm)	40 x 78 x 280	40 x 78 x 280	40 x 81.3 x 279.4	40 x 81.3 x 279.4	40 x 81.3 x 279.4	40 x 81.3 x 279.4
Power Density	10.30	10.30	11.76	11.76	11.76	11.76
Cubic Inches	53.42	53.42	55.44	55.44	55.44	55.44
Pro-E Files	NO	YES	YES	YES	YES	YES
Thermal Data	YES	YES	YES	YES	YES	YES
PQ Airflow Curves	YES	YES	YES	YES	YES	YES
Warranty	Two Years	Two Years	Two Years	Two Years	Two Years	Two Years
Ordering Codes						
Standard	DS550-3	DS550DC-3/	DS650-3	DS650-5	DS650-9	DS650DC-3
ALT Standby						DS650DC-3-002
Reverse Air		DS550DC-3-003	DS650-3-007			DS650DC-3-003
ALT Standby & Reverse Air						DS650DC-3-004
Disable External Fan Drive				DS650DC-3-001		



DS750PED



DS800SL



DS760SL



DS850

	DS750PED-3	DS760SL-3	DS800SL-3	DS850-3	DS850-5	DS850-9
Input						
Input Range	90-264 Vac	90-264 Vac	90-264 Vac	90-264 Vac	90-264 Vac	90-264 Vac
Frequency	47-63 Hz	47-63 Hz	47-63 Hz	47-63 Hz	47-63 Hz	47-63 Hz
Efficiency	94% Typ	90% Typ	92% Typ GLD	82% Typ	82% Typ	83% Typ
EMI/RFI	Class A	Class A	Class B	Class B	Class B	Class B
Leakage Current	1.75 mA @ 240 V	0.8 mA @240 V	0.8 mA @240 V	1.4 mA @ 240 V	1.4 mA @ 240 V	1.4 mA @ 240 V
Outputs						
Output Main	12 V / 62.5 A	12 V / 62.3 A	12 V / 66.7 A	12 V / 70 A	24 V / 35 A	48 V / 17.5 A
Output Stand-By	12 V / 3 A	5.0 Vsb / 3.6 A	5.0 Vsb / 4 A	3.3 Vsb / 6 A	3.3 Vsb / 6 A	3.3 Vsb / 6 A
OCP/OVP/OTP	YES	YES	YES	YES	YES	YES
I ² C Control	YES	YES	YES	YES	YES	YES
Environmental						
Operating Temp	0 °C to 50 °C	0 °C to 50 °C	0 °C to 50 °C	-10 °C to 50 °C	-10 °C to 50 °C	-10 °C to 50 °C
Derating	N/A	N/A	N/A	50% at 70 °C	50% at 70 °C	50% at 70 °C
Storage	-40 °C to +70 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
RoHS Compliant	YES	YES	YES	YES	YES	YES
MTBF	200K Hours	300K Hours	500K Hours	500K Hours	500K Hours	500K Hours
Other						
Size (inch)	1.57 x 3.39 x 7.74	1.57 x 2.15 x 12.68	1.57 x 2.15 x 12.68	1.57 x 3.20 x 11.00	1.57 x 3.20 x 11.00	1.57 x 3.20 x 11.00
Size (mm)	41 x 86.3 x 196.5	40 x 54.5 x 322	40 x 54.5 x 322	40 x 81.3 x 279.4	40 x 81.3 x 279.4	40 x 81.3 x 279.4
Power Density	18.23	17.76	18.69	15.38	15.38	15.38
Cubic Inches	41.14	42.8	42.8	55.44	55.44	55.44
Pro-E Files	YES	YES	YES	YES	YES	YES
Thermal Data	YES	YES	YES	YES	YES	YES
PQ Airflow Curves	YES	YES	YES	YES	YES	YES
Warranty	Two Years	Two Years	Two Years	Two Years	Two Years	Two Years
Ordering Codes						
Standard	DS750PED-3	DS760SL-3	DS800SL-3	DS850-3	DS850-5	DS850-9
ALT Standby		DS760SL-3-002		DS850-3-005		
Reverse Air	DS750PED-3-001	DS760SL-3-001	DS800SL-3-001	DS850-3-006		
ALT Standby & Reverse Air		DS760SL-3-003				



DS850DC



DS1100PED



DS1100TDC

NEW!**NEW!**

	DS850DC-3	DS1050-3	DS1100PED-3	DS1100SDC-3	DS1100SLPE-3	DS1100TDC-3
Input						
Input Range	40-72 Vdc	90-264 Vac	90-264 Vac	-36 to -72 Vdc	90-264 Vac	-40 to -72 Vdc
Frequency	DC	47-63 Hz	47-63 Hz	N/A	47-63 Hz	N/A
Efficiency	80% Typ	92% Typ GLD	94% Typ	90% Typ	94% Typ	90% Typ
EMI/RFI	N/A	Class B	Class A	Class A	Class A	Class A
Leakage Current	N/A	1.4 mA @ 240 V	1.75 mA @ 240 V	N/A	1.75 mA	N/A
Outputs						
Output Main	12 V / 70 A	12 V / 85.5 A	12 V / 91.67 A	12 V / 91.67 A	12 V / 90 A	12 V / 91.67 A
Output Stand-By	3.3 Vsb / 6 A	3.3 Vsb / 6 A	12 V / 3 A	12 V / 3 A	3.3 V / 3 A	12 V / 3.0 A
OCP/OVP/OTP	YES	YES	YES	YES	YES	YES
I ² C Control	YES	YES	YES	YES	YES	YES
Environmental						
Operating Temp	-10 °C to 50 °C	-10 °C to 50 °C	0 °C to 50 °C	0 °C to 50 °C	0 °C to 50 °C	0 °C to 50 °C
Derating	50% at 70 °C	50% at 70 °C	N/A	N/A	60% at 65 °C	N/A
Storage	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +70 °C	-40 °C to 70 °C	-40 °C to +85 °C	-40 °C to 70 °C
RoHS Compliant	YES	YES	YES	Yes	YES	YES
MTBF	500K Hours	500K Hours	200K Hours	> 200K Hours	300K Hours	> 300K Hours
Other						
Size (inch)	1.57 x 3.20 x 11.00	1.57 x 3.20 x 11.00	1.57 x 3.39 x 7.75	1.57 x 3.39 x 7.75	1.57 x 2.15 x 12.66	1.57 x 2.14 x 12.67
Size (mm)	40 x 81.3 x 279.4	40 x 81.3 x 279.4	42 x 86.3 x 196.5	42 x 86.3 x 196.5	40 x 54.6 x 321.56	40 x 54.5 x 322.0
Power Density	15.38	18.95	26.74	26.7	25.7	25.8
Cubic Inches	55.44	55.44	41.14	41.14	42.73	42.57
Pro-E Files	YES	YES	YES	YES	YES	YES
Thermal Data	YES	YES	YES	YES	YES	YES
PQ Airflow Curves	YES	YES	YES	YES	YES	YES
Warranty	Two Years	Two Years	Two Years	Two Years	Two Years	Two Years
Ordering Codes						
Standard	DS850DC-3	DS1050-3	DS1100PED-3	DS1100SDC-3	DS1100SLPE-3	DS1100TDC-3
ALT Standby	DS850DC-3-003	DS1050-3-002				
Reverse Air	DS850DC-3-004	DS1050-3-001	DS1100PED-3-001	DS1100SDC-3-001	DS1100SLPE-3-001	DS1100TDC-3-001
ALT Standby & Reverse Air		DS1050-3-003				



DS1200



DS2000

NEW!

	DS1200-3	DS1200DC-3	DS1600SPE-3	DS2000-3	DS2000SPE-3
Input					
Input Range	90-264 Vac	40-72 Vdc	180-264 Vac	90-264 Vac	90-140 Vac/180-264 Vac
Frequency	47-63 Hz	DC	47-63 Hz	47-63 Hz	47-63 Hz
Efficiency	90% Typ	91% Typ	94% Typ	87% Typ	94% Typ Platinum
EMI/RFI	Class B	N/A	Class A	Class B	Class A
Leakage Current	1.4 mA @ 240 V	N/A	1.75 mA @ 240 V	1.4 mA @ 24 0V	0.75 mA
Outputs					
Output Main	12 V / 98 A	12 V / 98 A	12 V / 133.3 A	12 V / 165 A	12 V / 163.9 A
Output Stand-By	3.3 Vsb / 6 A	3.3 Vsb / 6 A	12 V / 4.5 A	3.3 Vsb / 9 A	12 V / 3.5 A
OCP/OVP/OTP	YES	YES	YES	YES	YES
I ² C Control	YES	YES	YES	YES	YES
Environmental					
Operating Temp	-10 °C to 50 °C	-10 °C to 50 °C	0 °C to 50 °C	-10 °C to 50 °C	0 °C to 50 °C
Derating	50% at 70 °C	50% at 70 °C	50% at 70 °C	N/A	N/A
Storage	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to 70 °C
RoHS Compliant	YES	YES	YES	YES	YES
MTBF	500K Hours	500K Hours	200K Hours	500K Hours	> 500K Hours
Other					
Size (inch)	1.57 x 3.20 x 11.00	1.57 x 3.20 x 11.00	1.57 x 3.39 x 7.76	1.57 x 4.2 x 11.6	1.57 x 3.39 x 7.75
Size (mm)	40 x 81.3 x 279.4	40 x 81.3 x 279.4	43 x 86.3 x 196.5	40 x 106.7 x 295.7	42 x 86.3 x 196.5
Power Density	21.71	21.71	38.89	26.2	48.6
Cubic Inches	55.44	55.44	41.14	76.5	41.14
Pro-E Files	YES	YES	YES	YES	YES
Thermal Data	YES	YES	YES	YES	YES
PQ Airflow Curves	YES	YES	YES	YES	YES
Warranty	Two Years	Two Years	Two Years	Two Years	Two Years
Ordering Codes					
Standard	DS1200-3	DS1200DC-3 DS1200DC-3-005 (NEBS compliant)	DS1600SPE-3	DS2000-3	DS2000SPE-3
ALT Standby	DS1200-3-002	DS1200DC-3-002		DS2000-3-002	
Reverse Air	DS1200-3-003	DS1200DC-3-001	DS1600SPE-3-001	DS2000-3-001	DS2000SPE-3-001
ALT Standby & Reverse Air	DS1200-3-004				

DS2500PE-3



DS2900



DS3000


NEW!
NEW!

	DS2500PE-3	DS2700DC-3	DS2900	DS3000PE-3
Input				
Input Range	180-264 Vac	-40 to -72 Vdc	180-264 Vac	208-264 Vac
Frequency	47-63 Hz	N/A	47-63 Hz	47-63 Hz
Efficiency	94% Typ	92% Typ	90% Typ	94% Typ
EMI/RFI	Class A	Class A	Class B	Class A
Leakage Current	0.75 mA @ 240 V	N/A	1.4 mA @ 240 V	0.58 mA @ 240 V
Outputs				
Output Main	12 V / 208.3 A	12 V / 220 A	12 V / 240 A	12 V / 250 A
Output Stand-By	3.3 V / 2.7 A	12 V / 4.5 A	3.3 Vsb / 3 A	12 V / 4.5 A
OCP/OVP/OTP	YES	YES	YES	YES
I ² C Control	YES	YES	YES	YES
Environmental				
Operating Temp	10 °C to 50 °C	0 °C to 40 °C	0 °C to 50 °C	0 °C to 40 °C
Derating	N/A	N/A	N/A	25% at 50 °C
Storage	-40 °C to +60 °C	-40 °C to 70 °C	-40 °C to +85 °C	-40 °C to +85 °C
RoHS Compliant	YES	YES	YES	YES
MTBF	750K Hours	> 400K Hours	500K Hours	400K Hours
Other				
Size (inch)	1.69 x 5.47 x 10.63	4.15 x 2.78 x 11.12	3.07 x 4.17 x 8.5	4.15 x 2.78 x 11.12
Size (mm)	42.9 x 139 x 270	105.5 x 70.6 x 282.6	78 x 106 x 217	105.5 x 70.6 x 282.6
Power Density	25.44	23.6	26.7	26.26
Cubic Inches	98.27	114.23	108.8	114.23
Pro-E Files	YES	YES	YES	YES
Thermal Data	YES	YES	YES	YES
PQ Airflow Curves	YES	YES	YES	YES
Warranty	Two Years	Two Years	Two Years	Two Years
Ordering Codes				
Standard	DS2500PE-3	DS2700DC-3	DS2900-3	DS3000PE-3
ALT Standby			DS2900-3-002	
Reverse Air		DS2700DC-3-001	DS2900-3-001	DS3000PE-3-001
ALT Standby & Reverse Air			DS2900-3-003	

ADNB-C Series Single Phase

40-96 Watts

NEW!

Special Features

- Slim form factor
- Three year warranty
- High efficiency > 87% typical
- Full power at 50 °C
- Active PFC > 0.92 @ 96 W model
- Adjustable output
- Overvoltage protection with auto recovery
- Continuous short-circuit and overload protection
- New visual diagnostic LED
- DC OK Relay
- Screw terminal connections
- RoHS compliant
- No tools required for mounting



Electrical Specifications

Input	
AC Input range	Nominal: 88-264 Vac
DC Input range	124-370 Vdc
Frequency	47-67 Hz, 400 Hz
Efficiency	> 87%
Inrush current	30 A / 115 VAC 60 A / 230 VAC
PFC	Active > 0.92 @96 W model

Output	
Nominal voltage	See ordering information table below
Initial voltage setting	±1%
Hold-up time	> 32 ms / 230 VAC, > 16 ms / 115 VAC
Voltage regulation	< ±2% (combination line, load, time and temperature related changes)
Ripple	100 mVpp - 250 mVpp
Short-circuit current	1.5x nominal current at near zero volts at short-circuit condition
Overvoltage protection	115% - 150%, rated output voltage
Line and load regulation	< +2%
Time and temperature drift	< 1%

Ordering Information

Power	Input Voltage	Output	Size L x W x H (mm)	Efficiency	Model Number
40 W	88-264 Vac 124-370 Vdc	12V @ 3.4A	3.9" x 1.57" x 3.54" (99 x 40 x 90)	84%	ADNB034-12-1PM-C
40 W	88-264 Vac 124-370 Vdc	15V @ 2.7A	3.9" x 1.57" x 3.54" (99 x 40 x 90)	84%	ADNB027-15-1PM-C
40 W	88-264 Vac 124-370 Vdc	24V @ 1.7A	3.9" x 1.57" x 3.54" (99 x 40 x 90)	84%	ADNB017-24-1PM-C
40 W	88-264 Vac 124-370 Vdc	48V @ 0.85	3.9" x 1.57" x 3.54" (99 x 40 x 90)	85%	ADNB008-48-1PM-C
60 W	88-264 Vac 124-370 Vdc	12V @ 5A	3.9" x 1.57" x 3.54" (99 x 40 x 90)	79%	ADNB050-12-1PM-C
60 W	88-264 Vac 124-370 Vdc	15V @ 4A	3.9" x 1.57" x 3.54" (99 x 40 x 90)	86%	ADNB040-15-1PM-C
60 W	88-264 Vac 124-370 Vdc	24V @ 2.5A	3.9" x 1.57" x 3.54" (99 x 40 x 90)	89%	ADNB025-24-1PM-C
60 W	88-264 Vac 124-370 Vdc	48V @ 1.25	3.9" x 1.57" x 3.54" (99 x 40 x 90)	89%	ADNB012-48-1PM-C
90 W	88-264 Vac 124-370 Vdc	12V @ 7.5A	3.9" x 2.17" x 3.54" (99 x 55 x 90)	87%	ADNB075-12-1PM-C
96 W	88-264 Vac 124-370 Vdc	15V @ 6.4A	3.9" x 2.17" x 3.54" (99 x 55 x 90)	87%	ADNB064-15-1PM-C
96 W	88-264 Vac 124-370 Vdc	24V @ 4A	3.9" x 2.17" x 3.54" (99 x 55 x 90)	88%	ADNB40-24-1PM-C
96 W	88-264 Vac 124-370 Vdc	48V @ 2A	3.9" x 2.17" x 3.54" (99 x 55 x 90)	87%	ADNB020-48-1PM-C

ADN-C Series Single Phase

120-960 Watts

Special Features

- Slim form factor
- Five year warranty
- High efficiency > 90% typical
- Full power at 60 °C
- PowerBoost technology
- Industrial grade design
 - Metal mounting clip
 - Metal case
- MTBF > 450,000h demonstrated at 40 °C
- Active PFC > 0.92
- Adjustable output
- Overvoltage protection with auto recovery
- Continuous short-circuit and overload protection
- SEMI F47 Sag Immunity
- New visual diagnostic LED
- Three Status LEDs
 - Input, Output, Alarm
- DC OK Relay
- Parallel operation capability
- Screw terminal connections
- RoHS compliant
- No tools required for mounting



Electrical Specifications

Input	
AC Input range	Nominal: 115-230 Vac 85-264 Vac
DC Input range	90-375 Vdc
Frequency	47-67 Hz, 400 Hz
Efficiency	> 90%
Inrush current	ADN5-24-1PM-C: < 15 A ADN10-24-1PM-C: < 30 A ADN20-24-1PM-C: < 40 A
PFC	Active, better than 0.92



Output	
Nominal voltage	ADN5-24-1PM-C & ADN10-24-1PM-C: 24 Vdc (22.5-28.5 Vdc Adj) ADN20-24-1PM-C: 24 Vdc (24-28 Vdc Adj)
Initial voltage setting	24.5 V \pm 1%
Hold-up time	> 20 ms at full load (100 Vac Input @ Tamb = +25 °C)
Voltage regulation	< \pm 2% (combination line, load, time and temperature related changes)
Ripple	ADN5-24-1PM-C & ADN10-24-1PM-C: < 50 mVpp ADN20-24-1PM-C: < 100 mVpp
Back EMF immunity	< 35 Vdc
PowerBoost	1.5x nominal current for 4 seconds
Short-circuit current	1.5x nominal current at near zero volts at short-circuit condition
Parallel operation	Switch selectable single unit or parallel unit operation. Units will not be damaged by parallel operation (regardless of switch position setting)
Output noise suppression	Radiated EMI values below EN61000-6-2
Overvoltage protection	> 30.5 Vdc but < 33 Vdc, auto recovery
Line and load regulation	< 0.5%
Time and temperature drift	< 1%

Power	Voltage	Current	Size L x W x H (mm)	Model Number
120 W	85-264 Vac 90-375 Vdc	5 A	4.85" x 1.97" x 4.37" (123 x 50 x 111)	ADN5-24-1PM-C
240 W	85-264 Vac 90-375 Vdc	10 A	4.85" x 2.36" x 4.37" (123 x 60 x 111)	ADN10-24-1PM-C
480 W	85-264 Vac 90-375 Vdc	20 A	4.85" x 3.42" x 4.96" (123 x 87 x 126)	ADN20-24-1PM-C
960 W	85-264 Vac 90-375 Vdc	40 A	4.81" x 7.09" x 4.85" (122.2 x 180 x 123.3)	ADN40-24-1PM-C

ADN-C Series 3-Phase

120-960 Watts



Special Features

- Slim form factor
- Five year warranty
- High efficiency > 93% typical
- Full power at 60 °C
- PowerBoost technology
- Industrial grade design – metal cases
- MTBF > 450,000h demonstrated at 40 °C
- Active PFC
- Adjustable output
- Overvoltage protection with auto recovery
- Continuous short-circuit and overload protection
- Three Status LEDs – Input, Output, Alarm
- DC OK Relay
- Parallel operation capability
- Screw terminal connections
- RoHS compliant
- No tools required for mounting

Electrical Specifications

Input	
Nominal voltage	380-480 Vac
AC Input range	320-540 Vac
DC Input range	450-720 Vdc for ADN20
Frequency	50-60 Hz
Efficiency	93% for ADN20; 94% for ADN40
PFC	Active power factor correction
Two phase input	Derate to 75% and 50% for ADN20 and ADN40 respectively under loss of 1 phase. Units will shut down if thermal threshold is exceeded under this condition
Output	
Nominal voltage	24 V (24.0-28.0 Vdc Adj.)
Hold-up time	> 20 ms for ADN20; > 15 ms for ADN40
Voltage regulation	< ±2% overall
Ripple	< 100 mVpp
PowerBoost	1.5x nominal current for 4 seconds
Peak current	1.5x nominal current for 4 seconds minimum while holding voltage > 20 Vdc
Parallel operation	Single or parallel operation selectable via front switch. For redundant operation use of external diode module is preferred; ADN40 uses active paralleling
Power back immunity	> 35 V
Overvoltage protection	> 30.5 Vdc but < 33 Vdc, auto recovery



Power	Voltage	Current	Size L x W x H (mm)	Model Number
120 W	320-540 Vac 450-760 Vdc	5 A @ 24 Vdc	4.85" x 1.97" x 4.37" (123 x 50 x 111)	ADN5-24-3PM-C
240 W	320-540 Vac 450-760 Vdc	10 A @ 24 Vdc	4.85" x 2.36" x 4.37" (123 x 60 x 111)	ADN10-24-3PM-C
480 W	320-540 Vac 450-760 Vdc	20 A @ 24 Vdc	4.68" x 3.34" x 4.85" (119 x 85 x 123)	ADN20-24-3PM-C
960 W	320-540 Vac	40 A @ 24 Vdc	4.85" x 7.09" x 4.85" (123 x 180 x 123)	ADN40-24-3PM-C



DC–DC Converters


Artesyn Embedded Technologies is widely acknowledged as an industry leader in distributed power applications and produces an exceptionally wide range of DC–DC conversion products.

Distributed Power Architecture

Artesyn Embedded Technologies understands the needs and nuances of developing power systems using Distributed Power Architecture. We know it is your job to create the most efficient, cost-effective, quality system, and deliver it in a timely fashion.

From full-system power to board-level components, high-power isolated front ends to a full line of isolated and non-isolated DC-DC modules, Artesyn Embedded Technologies is the source for today's power systems.

Distributed Power Architecture DC-DC Conversion

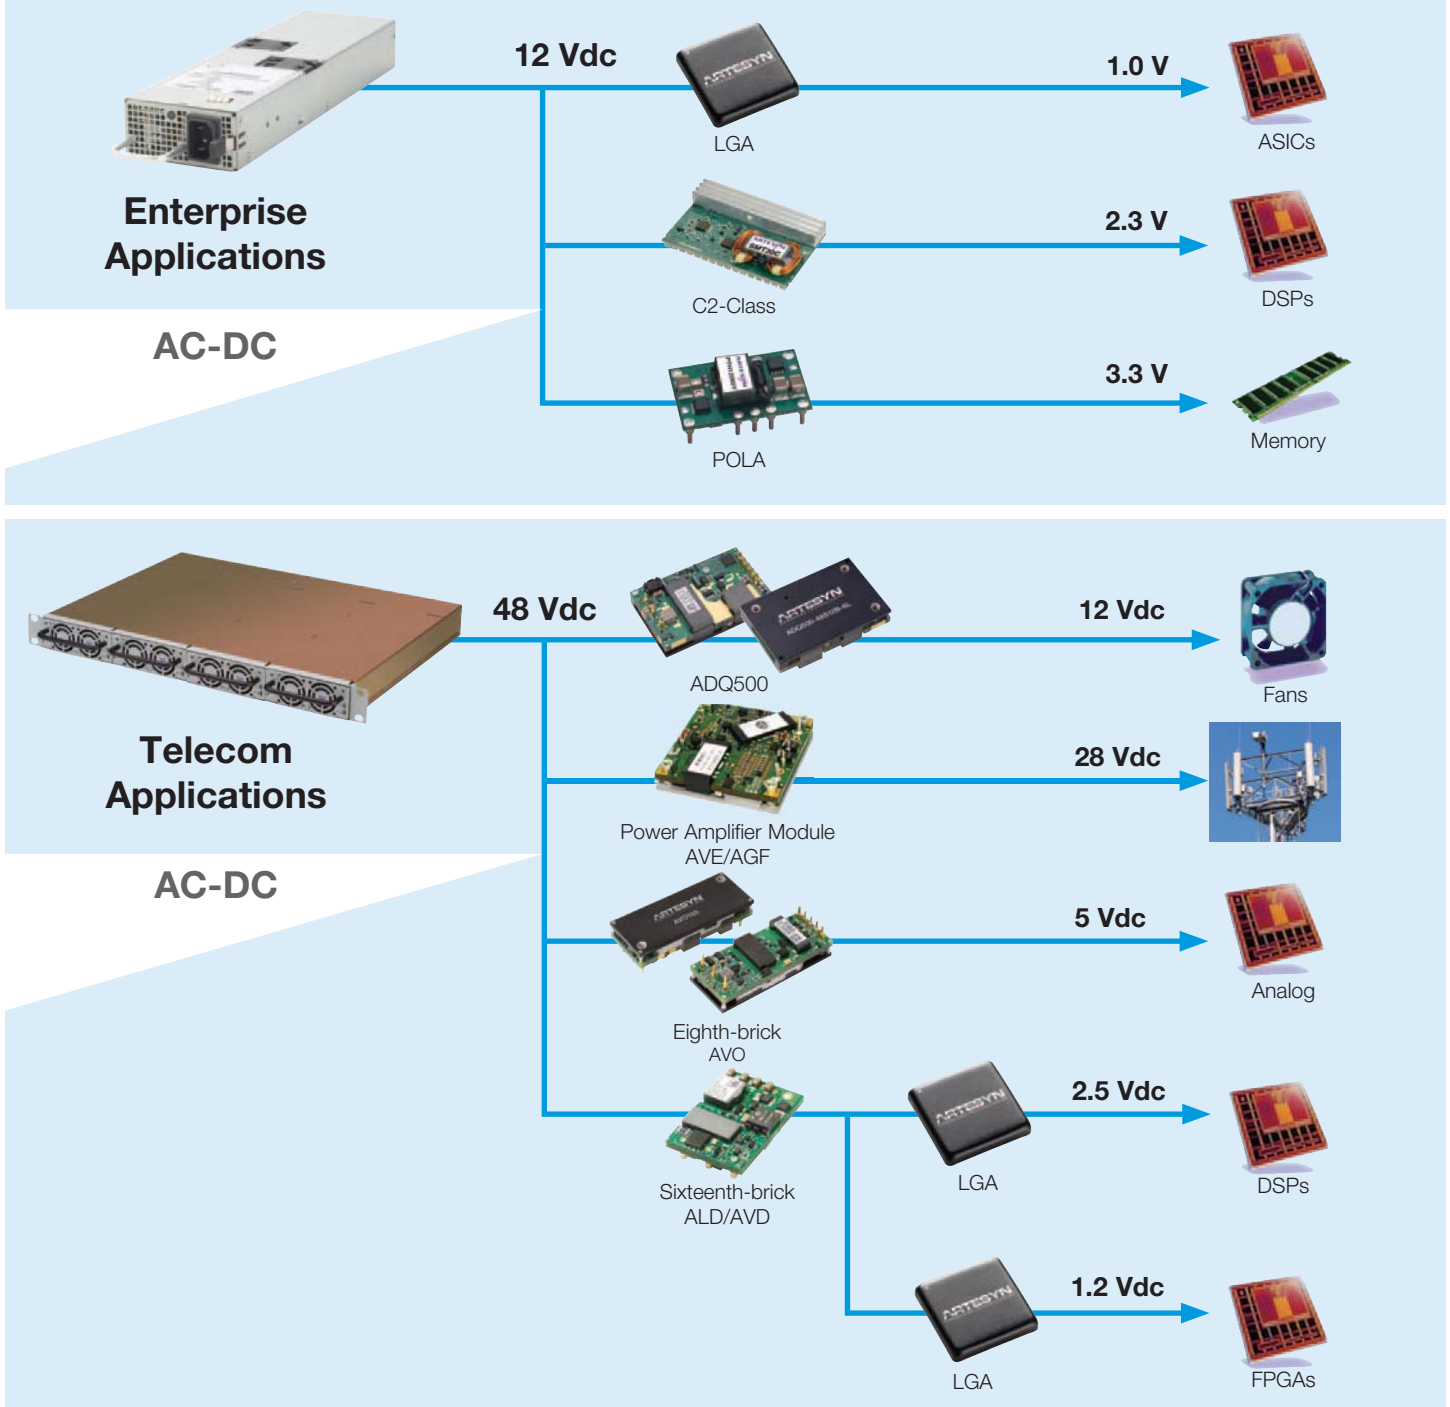

Sixteenth-Brick



AVD85



AVD120

Special Features

- Industry leading sixteenth-brick standard package and feature sets
- Scalable offering: 35 W, 50 W, 75 W, 85 W and 120 W platforms
- Mechanical options for optimum mounting flexibility: Through-hole (default) or surface mount (suffix “-S”) termination; 5 mm (default) or 3.7 mm through-hole pin length option
- Meets basic insulation
- Power densities as high as 146.5 W per cubic inch
- International safety standards approvals – UL, CSA, TÜV

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
1.2 V	Open-frame				
	15 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	84%	ALD15K48N-L
	25 A	48 V (36-75 V)	1.3" x 0.9" x 0.34" (33 x 22.9 x 8.5)	84%	AVD75-48S1V2-6L
	Baseplate				
	25 A	48 V (36-75 V)	1.3" x 0.9" x 0.5" (33 x 22.9 x 12.7)	84%	AVD75-48S1V2B-6L
1.5 V	Open-frame				
	15 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	85%	ALD15M48N-L
	25 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	85%	ALD25M48N-L
1.8 V	Open-frame				
	13 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	87%	ALD13Y48N-L
	25 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	88%	ALD25Y48N-L
2.5 V	Open-frame				
	11 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	89%	ALD11G48N-L
	20 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	89%	ALD20G48N-L
3.3 V	Open-frame				
	15 A	48 V (36-75 V)	1.3" x 0.9" x 0.37" (33 x 22.9 x 9.5)	91%	AVD50B-48S3V3-6L
	20 A	48 V (36-75 V)	1.3" x 0.9" x 0.41" (33 x 22.9 x 10.5)	92%	AVD75-48S3V3-6L
	25 A	48 V (36-75 V)	1.3" x 0.9" x 0.41" (33 x 22.9 x 10.5)	92%	AVD85-48S3V3-6L
	Baseplate				
	20 A	48 V (36-75 V)	1.3" x 0.9" x 0.5" (33 x 22.9 x 12.7)	92%	AVD75-48S3V3B-6L
5 V	Open-frame				
	7 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	91%	ALD07A48N-L
	10 A	48 V (36-75 V)	1.3" x 0.9" x 0.37" (33 x 22.9 x 9.5)	92%	AVD50-48S05-6L
	12 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	91%	ALD12A48N-L
	NEW! 17 A	48 V (36-75 V)	1.3" x 0.9" x 0.34" (33 x 22.9 x 8.5)	92%	AVD85-48S05-6L
	17 A	48 V (36-75 V)	1.3" x 0.9" x 0.34" (33 x 22.9 x 8.5)	92%	AVD100-48S05-6L
	Baseplate				
	NEW! 17 A	48 V (36-75 V)	1.3" x 0.9" x 0.5" (33 x 22.9 x 12.7)	92%	AVD85-48S05B-6L
	17 A	48 V (36-75 V)	1.3" x 0.9" x 0.34" (33 x 22.9 x 12.7)	92%	AVD100-48S05B-6L
	Open-frame				
12 V	2.75 A	48 V (36-75 V)	1.3" x 0.9" x 0.35" (33 x 22.9 x 8.89)	92%	ALD03B48N-L
	7 A	48 V (36-75 V)	1.3" x 0.9" x 0.34" (33 x 22.9 x 8.5)	92%	AVD85-48S12-6L
	NEW! 10 A	48 V (36-75 V)	1.3" x 0.9" x 0.34" (33 x 22.9 x 8.5)	92%	AVD120-48S12-6L
	Baseplate				
	7 A	48 V (36-75 V)	1.3" x 0.9" x 0.5" (33 x 22.9 x 12.7)	92%	AVD85-48S12B-6L
	NEW! 10 A	48 V (36-75 V)	1.3" x 0.9" x 0.5" (33 x 22.9 x 12.7)	92%	AVD120-48S12B-6L

Eighth-Brick




AVO200

Special Features

- Industry leading eighth-brick standard package and feature sets
- Scalable output power offering: Low power 80 W series or up to 240 W high power series
- Mechanical options for optimum mounting flexibility: Open-frame (ALO, LES, AVO) or baseplate (AEO or AVO-B) construction; Through-hole (default) or surface mount (suffix “-S”) termination; 5 mm (default) or 3.7 mm through-hole pin length option
- Meets basic insulation
- Power densities as high as 181 W per cubic inch
- Wide operating temperature range
- International safety standards approvals – UL, CSA, TÜV

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
1.0 V	Open-frame				
	25 A	48 V (36-75 V)	2.3" x 0.9" x 0.36" (57.9 x 22.9 x 9.14)	85%	LES25B48-1V0REJ
1.2 V	Open-frame				
	20 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	86%	AVO50-48S1V2-4
	25 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	86%	AVO75-48S1V2-4
	50 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	86%	LES50A48-1V2REJ
	Baseplate				
	50 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	85.5%	AVO100-48S1V2B-6L
1.5 V	Open-frame				
	20 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	88%	AVO50-48S1V5-4
	40 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	89%	AVO100B-48S1V5-6L
	Baseplate				
	40 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	89%	AVO100B-48S1V5B-6L
1.8 V	Open-frame				
	20 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	89%	AVO50-48S1V8-4
	25 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	89%	AVO75-48S1V8-4
	40 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	89.5%	AVO100-48S1V8-6L
	Baseplate				
	40 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	89.5%	AVO100-48S1V8B-6L
2.5 V	Open-frame				
	20 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	90%	AVO50-48S2V5-4
	25 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	90%	AVO75-48S2V5-4
	35 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	91.5%	AVO100-48S2V5-6L
	40 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	91%	LES40A48-2V5REJ
	Baseplate				
	35 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	91.5%	AVO100-48S2V5B-6L
3.3 V	Open-frame				
	15 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	90%	AVO50C-48S3V3-6
	20 A	24 V (18-36 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	90%	LES20A24-3V3REJ
	20 A	24 V/48 V (19-60 V)	2.3" x 0.9" x 0.32" (57.9 x 22.9 x 8.13)	91%	ALO20F36N-L
	20 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	91%	AVO75-48S3V3-4
	30 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	91%	AVO100B-48S3V3-6L
	Baseplate				
	30 A	48 V (36-75 V)	2.3" x 0.9" x 0.4" (57.9 x 22.9 x 10.16)	91%	AVO100C-48S3V3B-4L

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
5 V	Open-frame				
	10 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	91%	AVO50-48S05-4
	13 A	48 V (36-75 V)	2.3" x 0.9" x 0.36" (57.9 x 22.9 x 9.14)	92%	LES13B48-5V0REJ
	15 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	91%	AVO75-48S05-6
	20 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	92.8%	AVO100-48S05-6L
	NEW! 40 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	94%	AVO200-48S05-6L
12 V	Baseplate				
	20 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	92.8%	AVO100-48S05B-6L
	NEW! 40 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	94%	AVO200-48S05B-6L
	Open-frame				
	4.2 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	91%	AVO50-48S12-6L
	6.3 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	91%	AVO75-48S12P-4
NEW!	10 A	48 V (36-75 V)	2.28" x 0.9" x 0.374" (57.9 x 22.9 x 9.5)	93%	AVO120-48S12-6L
	17 A	48 V (36-75 V)	2.3" x 0.9" x 0.34" (57.9 x 22.9 x 8.5)	94%	AVO200-48S12-6L
	20 A	48 V (41-75 V)	2.3" x 0.9" x 0.37" (57.9 x 22.9 x 9.5)	94%	AVO240-48S12-6L
	Baseplate				
NEW!	4 A	48 V (36-75 V)	2.3" x 0.9" x 0.4" (57.9 x 22.9 x 10.16)	93%	AEO04B48N-L
	10 A	48 V (36-75 V)	2.28" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	93%	AVO120-48S12B-6L
	17 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	94%	AVO200-48S12B-6L
	20 A	48 V (41-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	94%	AVO240-48S12B-6L

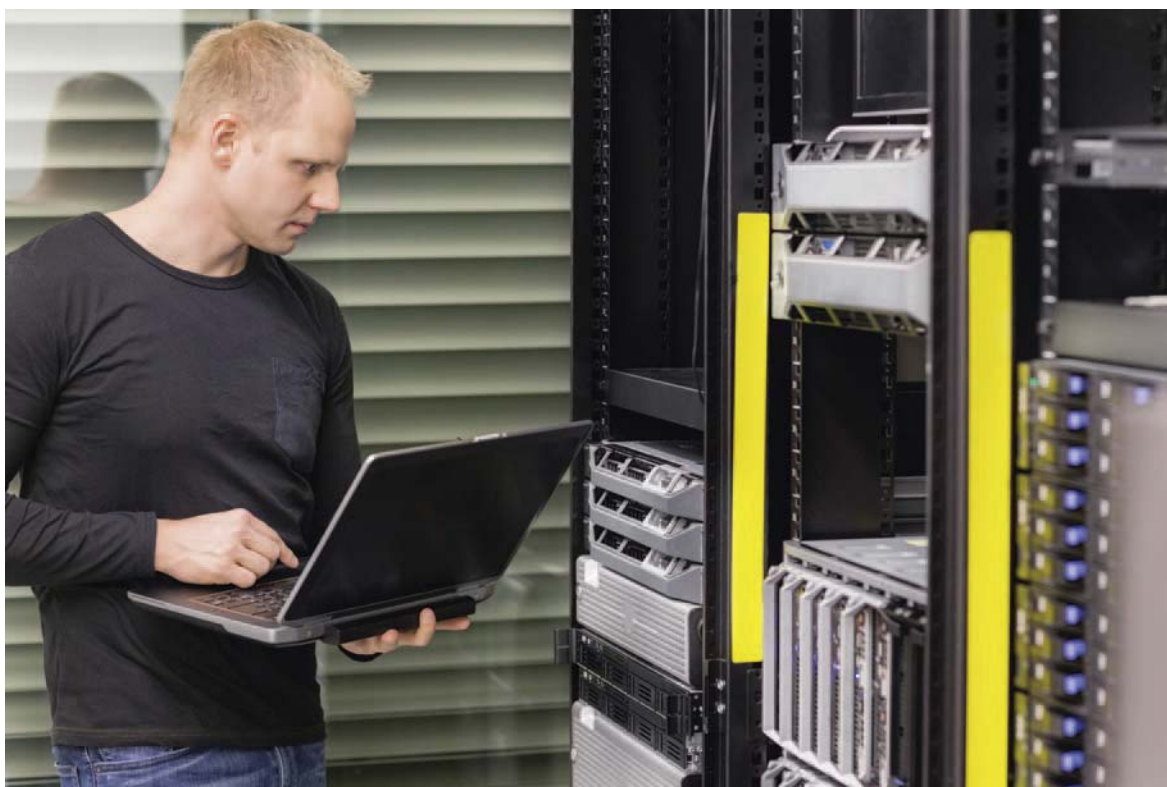

Quarter-Brick



ADQ500

Special Features

- Industry leading quarter-brick standard package and feature sets
- Up to 100 A offering
- Wide operating temperature range
- Meets basic insulation
- PMBus interface
- Exceptional dynamic response and reactive loading capability
- Monotonic start-up characteristic
- International safety standards approvals – UL, CSA, TÜV

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
1.2 V	Open-frame				
	60 A	48 V (36-75 V)	2.28" x 1.45" x 0.39" (57.9 x 36.8 x 9.8)	85%	AGQ300-48S1V2-4L
	100 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	86%	LQS100A48-1V2REJ
	Baseplate				
	60 A	48 V (36-75 V)	2.28" x 1.45" x 0.50" (57.9 x 36.8 x 12.7)	85%	AGQ300-48S1V2B-4L
1.5 V	Open-frame				
	50 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	89%	LQS50A48-1V5-REJ
	80 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	89%	LQS80A48-1V5REJ
	100 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	89%	LQS100A48-1V5REJ
1.8 V	Open-frame				
	50 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	90%	LQS50A48-1V8REJ
	80 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	90%	LQS80A48-1V8REJ
	100 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	90%	LQS100A48-1V8REJ
2.5 V	Open-frame				
	50 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	90%	LQS50A48-2V5REJ
	80 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	91%	LQS80A48-2V5REJ
3.3 V	Open-frame				
	30 A	24 V (18-36 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	90%	LQS30A24-3V3REJ
	40 A	48 V (36-75 V)	2.28" x 1.45" x 0.39" (57.9 x 36.8 x 9.8)	91%	AGQ200B-48S3V3-4L
	50 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	91%	LQS50A48-3V3REJ
	60 A	48 V (36-75 V)	2.3" x 1.45" x 0.34" (58.42 x 36.8 x 8.64)	91%	LQS60A48-3V3REJ
	Baseplate				
	40 A	48 V (36-75 V)	2.28" x 1.45" x 0.50" (57.9 x 36.8 x 12.7)	91%	AGQ200B-48S3V3B-4L
5 V	Open-frame				
	20 A	24 V (18-36 V)	2.28" x 1.45" x 0.39" (57.9 x 36.8 x 9.6)	91%	AVQ100-24S05-4L
	Baseplate				
	20 A	24 V (18-36 V)	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	91%	AVQ100-24S05B-4L
12 V	Open-frame				
	25 A	48 V (36-75 V)	2.28" x 1.45" x 0.36" (57.9 x 36.8 x 9.6)	94%	AVQ300-48S12-6L
	33 A	48 V (36-75 V)	2.28" x 1.45" x 0.36" (57.9 x 36.8 x 9.6)	93%	AVQ400-48S12-6L
	NEW! 42 A	48 V (36-75 V)	2.28" x 1.45" x 0.43" (57.9 x 36.8 x 11)	95%	ADQ500-48S12-6L
	NEW! 50 A	48 V (40-60 V)	2.28" x 1.45" x 0.43" (57.9 x 36.8 x 11)	95%	ADQ600-48S12-6L
	Baseplate				
	15 A	24 V (18-30 V)	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	94%	IBC15-24S12ENJ
	25 A	48 V (36-75 V)	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	94%	AVQ300-48S12B-4L
	33 A	48 V (36-75 V)	2.28" x 1.45" x 0.50" (57.9 x 36.8 x 12.7)	93%	AVQ400-48S12B-6L
	NEW! 42 A	48V (36-75 V)	2.28" x 1.45" x 0.43" (57.9 x 36.8 x 11)	95%	ADQ500-48S12B-6L
	NEW! 50 A	48V (40-60 V)	2.28" x 1.45" x 0.43" (57.9 x 36.8 x 11)	95%	ADQ600-48S12B-6L

Half-Brick



AVE600

Special Features

- Industry standard half-brick available up to 50 A
- Baseplate construction
- Highest efficiencies available
- Optimum transient load performance and reactive loading capacity
- Wide operating temperature range
- International safety standards approvals – UL, CSA, TÜV

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
12 V	Baseplate				
	50 A	48 V (36-75 V)	2.4" x 2.3" x 0.5" (61 x 57.9 x 12.7)	95.5%	AVE600-48S12B-4L


RF Power Bricks



AGF800



AVO100

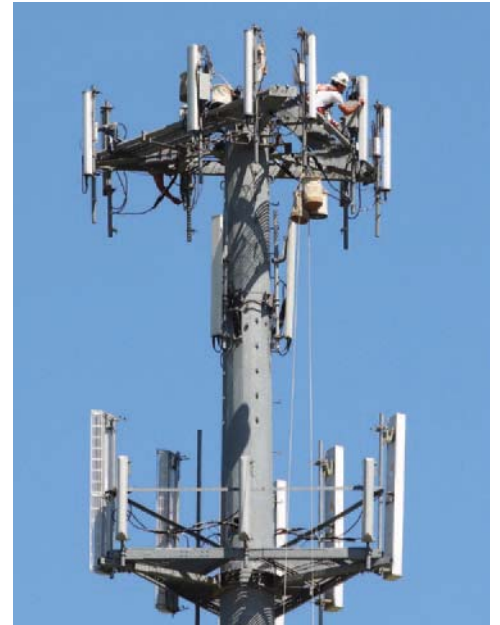

Special Features

- Specialized high power bricks for RF applications such as base station power amplifiers
- Offered in 24 V and 48 V input voltages
- Wide output voltage adjustability
- -40 °C to 85 °C for AVE, AGF baseplate temperature with no derating at rated power
- International safety standard approvals – UL, CSA, VDE, CB Report

Eight-Brick

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
28 V	Open-Frame				
	NEW! 3.57 A	48 V (36-75 V)	2.3" x 0.9" x 0.39" (57.9 x 22.9 x 9.6)	92%	AVO100-48S28-6L
	Baseplate				
	NEW! 3.57 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	92%	AVO100-48S28-6L
	NEW! 9 A	48 V (36-75 V)	2.3" x 0.9" x 0.5" (57.9 x 22.9 x 12.7)	93%	AVO250-48S28-6L

Half-Brick

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
28 V	Aluminum Board				
	12.5 A	24 V (18-36 V)	2.4" x 2.3" x 0.5" (61 x 57.9 x 12.7)	93%	AVE350-24S28-6L
	12.5 A	48 V (36-75 V)	2.4" x 2.3" x 0.5" (61 x 57.9 x 12.7)	93%	AVE350B-48S28-6
	16 A	48 V (36-75 V)	2.4" x 2.3" x 0.5" (61 x 57.9 x 12.7)	94%	AVE450B-48S28-6L/M

Full-Brick

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
14-33 V	Aluminum Substrate				
	21.5 A	24 V (18-36 V)	4.6" x 2.4" x 0.5" (116.8 x 61 x 12.7)	93%	AGF600-24S28-6L
	21.5 A	48 V (36-75 V)	4.6" x 2.4" x 0.5" (116.8 x 61 x 12.7)	93.5%	AGF600-48S28-6L
	25 A	48 V (36-75 V)	4.6" x 2.4" x 0.5" (116.8 x 61 x 12.7)	93%	AGF700-48S30LT
	28.5 A	48 V (36-75 V)	4.6" x 2.4" x 0.5" (116.8 x 61 x 12.7)	94%	AGF800-48S28-6L
48 V	16 A	50 V (36-75 V)	4.6" x 2.4" x 0.5" (116.8 x 61 x 12.7)	94.5%	AGF800-48S48P-6L
48 V/5 V	NEW! 23.3 A / 20 A	48 V (36-75 V)	4.6" x 2.4" x 0.5" (116.8 x 61 x 12.7)	93.5%	AGF800-48D3005-6L

Wide Input Voltage Series



Special Features

- Wide input voltage range to cover 24 V and 48 V input
- Industry standard brick package
- Open-frame and baseplate construction
- Wide operating temperature

		Vout	Iout	Input Voltage	Efficiency	Package LxWxH (mm)	Model number
Eighth Brick	Baseplate	3.3 V	20 A	24V, 48V (18-75V)	93.0%	2.28" x 0.9" x 0.50" (57.9 x 22.9 x 12.7)	AVO75B-36S3V3B-6L
Eighth Brick	Baseplate	3.3 V	30 A	24V, 48V (18-75V)	93.0%	2.28" x 0.9" x 0.50" (57.9 x 22.9 x 12.7)	AVO100-36S3V3B-6L
Eighth Brick	Open-frame	3.3 V	20 A	24V, 48V (18-75V)	93.0%	2.28" x 0.9" x 0.43" (57.9 x 22.9 x 10.8)	AVO75B-36S3V3-6L
Eighth Brick	Open-frame	12 V	4 A	24V, 48V (18-60V)	91.0%	2.28" x 0.9" x 0.33" (57.9 x 22.9 x 8.5)	IBC04-36S12-J
Quarter Brick	Baseplate	3.3 V	25 A	24V, 48V (18-60V)	90% @ 48 vin, 92% @ 24 vin	2.28" x 1.45" x 0.40" (57.9 x 36.8 x 10.2)	AVQ100-36S3V3B-6L
Quarter Brick	Baseplate	12 V	19 A	24V, 48V (18-75V)	94.0%	2.28" x 1.45" x 0.50" (57.9 x 36.8 x 12.7)	AVQ200-36S12B-6L
Quarter Brick	Open-frame	3.3 V	25 A	24V, 48V (18-60V)	90% @ 48 vin, 92% @ 24 vin	2.28" x 1.45" x 0.40" (57.9 x 36.8 x 10.2)	AVQ100-36S3V3-6L
Quarter Brick	Open-frame	12 V	19 A	24V, 48V (18-75V)	94.0%	2.28" x 1.45" x 0.38" (57.9 x 36.8 x 9.6)	AVQ200-36S12-6L




C-Class – High Density

The 2nd generation C-Class non-isolated DC–DC converters are designed to provide good efficiency and performance, a smaller footprint, and integrated input and output capacitors.

Special Features

- Wide input voltage ranges: 3-13.8 V or 4.5-13.8 V
- Wide output voltage trim/adjustability: 0.59-5.1 V
- Output current: 3-40 A
- High efficiency up to 94%
- Remote on/off
- Power good
- Remote sense (Sxx20C2, Sxx40C2 and Sxx60C2)
- Excellent transient response
- Current sink capability for termination applications
- Operating temperature range for LDO03, LDO06, LDO10: -40 °C to 85 °C.
- Operating temperature range for SIL/SMT20C2, SIL/SMT40C2 and SIL60C2: 0 °C to 70 °C
- Operating temperature range for SIL/SMT80C2: 0 °C to 85 °C
- Protection: over current/short-circuit
- No added input or output capacitors needed for ripple current capability or stability
- Cost-optimized design – industry leading value
- Compact footprint, vertical, horizontal and horizontal SMT options
- International safety standard approvals – UL, CSA, TÜV & CB Report

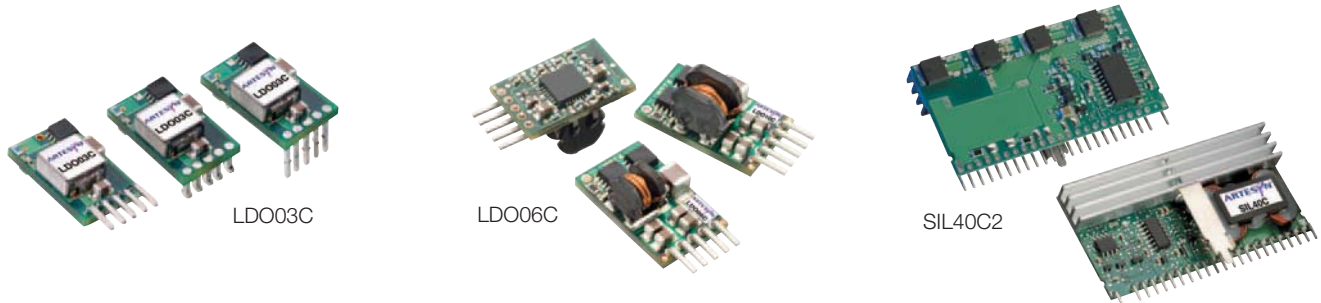

General-Purpose C-Class Non-Isolated DC–DC Converters

Output Current	Input Voltage	Output Voltage	Efficiency	Package L x W x H (mm)	Model Number
Single-In-Line, Through-Hole Mounting					
3 A	3.0-13.8 Vdc	0.59-5.1 V	90%	0.37" x 0.21" x 0.61" (9.4 x 5.33 x 15.49)	LDO03C-005W05-VJ
6 A	3.0-13.8 Vdc	0.59-5.1 V	92%	0.41" x 0.37" x 0.65" (10.41 x 9.4 x 16.51)	LDO06C-005W05-VJ
10 A	3.0-13.8 Vdc	0.59-5.1 V	94%	0.41" x 0.45" x 0.65" (10.41 x 11.43 x 16.51)	LDO10C-005W05-VJ
20 A	4.5-13.8 Vdc	0.59-5.1 V	93%	1.2" x 0.46" x 0.61" (30.48 x 11.68 x 15.49)	SIL20C2-00SADJ-VJ
40 A	4.5-13.8 Vdc	0.6-5.0 V	94%	1.2" x 0.43" x 1.1" (30.48 x 10.92 x 27.94)	SIL40C2-00SADJ-VJ
60 A	10.8-13.2 Vdc	1.2-4.0V	89%	1.98 " x 0.54" x 0.78" (50.29 x 13.72 x 19.81)	SIL60C2-00SADJ-VDJ
80 A	4.7-13.8 Vdc	0.84-5.0 V	93%	2.4" x 0.7" x 1.25" (60.96 x 17.78 x 31.75)	SIL80C2-00SADJ-VJ
Surface-Mounting					
3 A	3.0-13.8 Vdc	0.59-5.1 V	90%	0.61" x 0.37" x 0.29" (15.49 x 9.4 x 7.37)	LDO03C-005W05-SJ
6 A	3.0-13.8 Vdc	0.59-5.1 V	92%	0.65" x 0.41" x 0.44" (16.51 x 10.41 x 11.18)	LDO06C-005W05-SJ
10 A	3.0-13.8 Vdc	0.59-5.1 V	94%	0.65" x 0.41" x 0.52" (16.51 x 10.41 x 13.21)	LDO10C-005W05-SJ
20 A	4.5-13.8 Vdc	0.59-5.1 V	93%	1.2" x 0.61" x 0.48" (30.48 x 15.49 x 12.19)	SMT20C2-00SADJJ
40 A	4.5-13.8 Vdc	0.6-5.0 V	94%	1.2" x 1.1" x 0.44" (30.48 x 27.94 x 11.18)	SMT40C2-00SADJJ
80 A	4.5-13.8 Vdc	0.84-5.1V	88%	2.4" x 1.25" x 0.7" (60.96 x 31.75 x 18.03)	SMT80C2-00SADJ-J

C-Class – High Density LGA C Series

The latest addition to the C-Class non-isolated DC-DC converter offering packaged in an ultra-compact, low-profile Land Grid Array with current densities up to 225 A/in³.

Special Features

- High density, ultra low profile surface mount module in Land Grid Array (LGA) package
- Available in 4 different output current levels: 3, 6, 10 and 20 Amps
- Wide input voltage range: 3.0-14.0 V
- Adjustable output voltage: 0.59-5.1 V via external resistor
- High efficiency ~92% typical
- Wide ambient operating temperature range: -40 °C to 85 °C
- Input UVLO; Remote On/Off; Output Adjust; Margin; PGood signal, Differential sense
- Current sink capability for voltage termination applications
- Integrated input and output capacitors resulting in minimal external capacitance required for stable operation



LGA03C



LGA06C



LGA10C



LGA20C



LGA C Series Non-Isolated DC-DC Converters

Output Current	Input Voltage	Output Voltage	Efficiency	Package L x W x H (mm)	Model Number
Surface-Mounting					
3 A	3.0-14 Vdc	0.59-5.1 V	92%	0.65" x 0.65" x 0.129" (16.51 x 16.51 x 3.27)	LGA03C-00SADJJ
6 A	3.0-14 Vdc	0.59-5.1 V	92%	0.65" x 0.65" x 0.129" (16.51 x 16.51 x 3.27)	LGA06C-00SADJJ
10 A	3.0-14 Vdc	0.59-5.1 V	92%	0.65" x 0.65" x 0.129" (16.51 x 16.51 x 3.27)	LGA10C-00SADJJ
20 A	4.5-14 Vdc	0.59-5.1 V	91%	0.65" x 0.65" x 0.210" (16.51 x 16.51 x 5.33)	LGA20C-01SADJJ

Note: Optional heatsink kits are available. Ordering part number is LGA-HTSK-KIT-XXX

XXX = Total height of the LGA20C-01SADJJ with heatsink attached: 045 = 0.45"; 048 = 0.48"; 050 = 0.50"


A Paradigm Shift in Converter Packaging

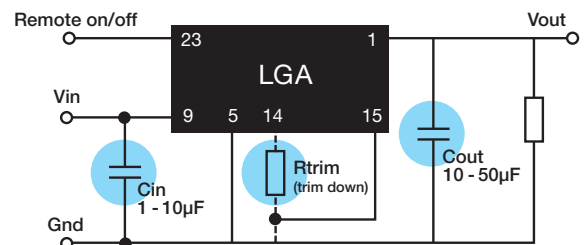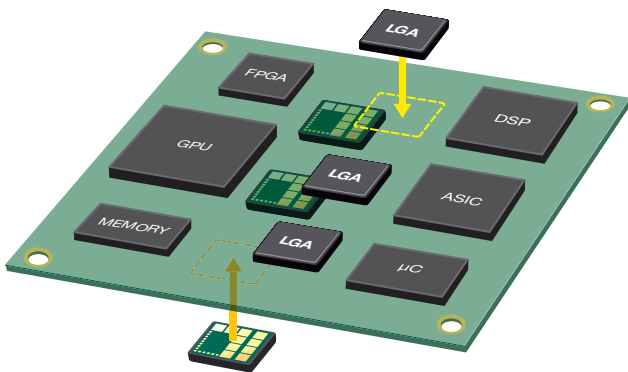


- Compact LGA package - significant improvement in current density, saves board space
- Scalable solution, one footprint design for 3, 6, 10 and 20 A offering
- Fully operational DC-DC solution with 3 external components
- Allows for bilateral thermal management not easily provided by "down" solutions or typical modules (e.g., uniform height for coldplate cooling)

E-Class – Performance

Efficiencies as high as 96% and current densities up to 140 A/in³.

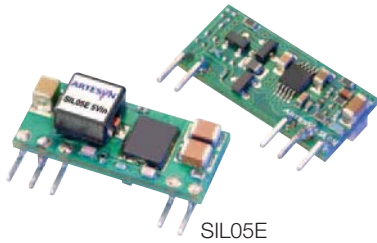

SIL05E

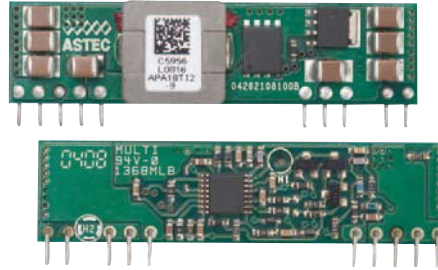

Special Features

Efficiencies as high as 96% and current densities up to 140 A/in³.

- Input voltage ranges: 3-5.5 V, 4.5-5.5 V, 8-14 V, 10-14 V
- Wide output voltage trim ranges: 0.8-3.63 V and 0.75-5.5 V
- Output current: 5-30 A
- Remote on/off
- Remote sense


- Industry standard footprint—vertical and horizontal mounting (low profile SMT/SIP-through-hole)
- Operating temperature range: -40 °C to 85 °C
- Protection: overcurrent/short-circuit
- International safety standard approvals –UL, CSA, TÜV & CB Report

General-Purpose E-Class Non-Isolated DC–DC Converters

Output Current	Input Voltage	Output Voltage	Efficiency	Package L x W x H (mm)	Model Number
Single-In-Line, Through-hole Mounting					
5 A	3.0-5.5 Vdc	0.75-3.63 V	94%	0.9" x 0.28" x 0.4" (22.86 x 7.11 x 10.16)	SIL05E-05W3V3-VJ
10 A	4.5-5.5 Vdc	0.8-3.63 V	95%	2" x 0.31" x 0.5" (50.8 x 7.87 x 12.7)	SIL10E-05W3V3-VJ
10 A	10-14 Vdc	0.8-3.63 V	94%	2" x 0.31" x 0.5" (50.8 x 7.87 x 12.7)	SIL10E-12W3V3-VJ
15 A	3.0-5.5 Vdc	0.8-3.63 V	94%	2" x 0.31" x 0.5" (50.8 x 7.87 x 12.7)	SIL15E-05W3V3-VJ
15 A	10-14 Vdc	0.8-3.63 V	94%	2" x 0.31" x 0.5" (50.8 x 7.87 x 12.7)	SIL15E-12W3V3-VJ
18 A	3.0-5.5 Vdc	0.75-3.6 V	92%	2" x 0.39" x 0.5" (50.8 x 9.91 x 12.7)	APA18T04-9L
18 A	10-14 Vdc	0.75-5.5 V	92%	2" x 0.39" x 0.5" (50.8 x 9.91 x 12.7)	APA18T12-9L
30 A	8.0-14 Vdc	0.8-3.63 V	93%	2" x 0.31" x 0.5" (50.8 x 7.87 x 12.7)	SIL30E-12W3V3-VJ
Surface-Mounting					
5 A	3.0-5.5 Vdc	0.75-3.63 V	94%	0.8" x 0.45" x 0.26" (20.32 x 11.43 x 6.6)	SMT05E-05W3V3J
5 A	10-14 Vdc	0.8-3.63 V	91%	0.8" x 0.45" x 0.24" (20.32 x 11.43 x 6.1)	SMT05E-12W3V3J
10 A	3.0-5.5 Vdc	0.8-3.63 V	96%	1.3" x 0.53" x 0.32" (33.02 x 13.46 x 8.13)	SMT10E-05W3V3J
10 A	10-14 Vdc	0.8-3.63 V	94%	1.3" x 0.53" x 0.32" (33.02 x 13.46 x 8.13)	SMT10E-12W3V3J
15 A	3.0-5.5 Vdc	0.8-3.63 V	95%	1.3" x 0.53" x 0.32" (33.02 x 13.46 x 8.13)	SMT15E-05W3V3J
15 A	10-14 Vdc	0.8-3.63 V	94%	1.3" x 0.53" x 0.32" (33.02 x 13.46 x 8.13)	SMT15E-12W3V3J
18 A	3.0-5.5 Vdc	0.75-3.63 V	92%	1.3" x 0.53" x 0.34 (33.02 x 13.46 x 8.64)	APC18T04-9L
18 A	10-14 Vdc	0.75-5.5 V	92%	1.3" x 0.53" x 0.34 (33.02 x 13.46 x 8.64)	APC18T12-9L
30 A	8.0-14 Vdc	0.8-3.63 V	91%	1.3" x 0.53" x 0.32" (33.02 x 13.46 x 8.13)	SMT30E-12W3V3J

POLA – General Purpose

Choose POLA modules for multi-sourced and interoperable parts.

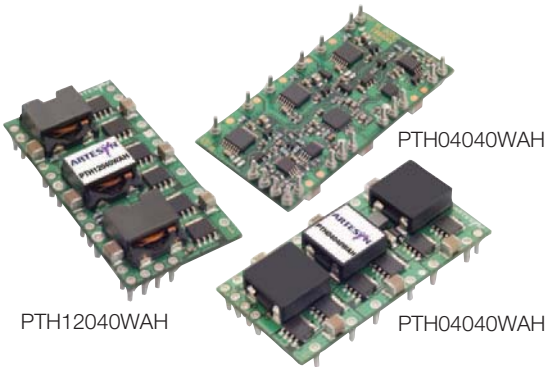

Special Features

- Input voltage ranges: 2.95-3.65 V, 4.5-5.5 V, 10.8-13.2 V
- Wide output voltage trim and adjustability: 0.8-5.5 V
- Output current: 6-60 A
- High efficiency up to 96%
- Auto-Track™ Sequencing
- Margin up/down controls
- Pre-bias start up capability
- Remote on/off
- Remote sense
- POLA compatible
- True multi-sourcing flexibility (form, fit and function)
- Operating temperature range: -40 °C to 85 °C
- Protection: overcurrent/short-circuit
- Through-hole or surface-mount
- International safety standard approvals – UL, CSA, TÜV & CB Report


General Purpose POLA Non-Isolated DC-DC Converters

Output Current	Input Voltage	Output Voltage	Efficiency	Package L x W x H (mm)	Model Number*
6 A	2.95-3.65 Vdc	0.8-2.5 V	94%	0.87" x 0.495" x 0.335" (22.01 x 12.57 x 8.51)	PTH03050WAD
6 A	4.5-5.5 Vdc	0.8-3.6 V	95%	0.87" x 0.495" x 0.335" (22.01 x 12.57 x 8.51)	PTH05050WAD
6 A	10.8-13.2 Vdc	1.2-5.5 V	93%	0.87" x 0.495" x 0.335" (22.01 x 12.57 x 8.51)	PTH12050WAD
8 A	2.95-3.65 Vdc	0.8-2.5 V	93%	0.9" x 0.33" x 0.4" (22.86 x 8.38 x 10.16)	PTV03010WAD
8 A	4.5-5.5 Vdc	0.8-3.6 V	95%	0.9" x 0.33" x 0.4" (22.86 x 8.38 x 10.16)	PTV05010WAD
8 A	10.8-3.2 Vdc	1.2-5.5 V	92%	0.9" x 0.33" x 0.4" (22.86 x 8.38 x 10.16)	PTV12010WAD
10 A	2.95-3.65 Vdc	0.8-2.5 V	93%	0.995" x 0.62" x 0.354" (25.27 x 15.75 x 8.99)	PTH03060WAD
10 A	4.5-5.5 Vdc	0.8-3.6 V	94%	0.995" x 0.62" x 0.354" (25.27 x 15.75 x 8.99)	PTH05060WAD
10 A	10.8-3.2 Vdc	1.2-5.5 V	94%	0.995" x 0.62" x 0.354" (25.27 x 15.75 x 8.99)	PTH12060WAD
12 A	10.8-13.2 Vdc	1.2-5.5 V	94%	1.370" x 0.62" x 0.354" (34.80 x 15.75 x 8.99)	PTH12010WAD
15 A	2.95-3.65 Vdc	0.8-2.5 V	93%	1.370" x 0.62" x 0.354" (34.80 x 15.75 x 8.99)	PTH03010WAD
15 A	4.5-5.5 Vdc	0.8-3.6 V	95%	1.370" x 0.62" x 0.354" (34.80 x 15.75 x 8.99)	PTH05010WAD
16 A	10.8-13.2 Vdc	1.2-5.5 V	93%	1.750" x 0.37" x 0.500" (44.45 x 9.4 x 12.7)	PTV12020WAD
18 A	2.95-3.6 Vdc	0.8-2.5 V	95%	1.750" x 0.37" x 0.500" (44.45 x 9.4 x 12.7)	PTV03020WAD
18 A	4.5-5.5 Vdc	0.8-3.6 V	94%	1.750" x 0.37" x 0.500" (44.45 x 9.4 x 12.7)	PTV05020WAD
18 A	10.8-13.2 Vdc	1.2-5.5 V	95%	1.495" x 0.87" x 0.354" (37.97 x 22.01 x 8.99)	PTH12020WAD
22 A	2.95-3.65 Vdc	0.8-2.5 V	95%	1.495" x 0.87" x 0.354" (37.97 x 22.01 x 8.99)	PTH03020WAD
22 A	4.5-5.5 Vdc	0.8-3.6 V	96%	1.495" x 0.87" x 0.354" (37.97 x 22.01 x 8.99)	PTH05020WAD
26 A	10.2-13.8 Vdc	1.2-5.5 V	95%	1.37" x 1.12" x 0.354" (34.80 x 28.45 x 8.99)	PTH12030WAD
30 A	2.95-3.65 Vdc	0.8-2.5 V	93%	1.37" x 1.12" x 0.354" (34.80 x 28.45 x 8.99)	PTH03030WAD
30 A	4.5-5.5 Vdc	0.8-3.6 V	94%	1.37" x 1.12" x 0.354" (34.80 x 28.45 x 8.99)	PTH05030WAD
50 A	8.0-14 Vdc	0.8-5.5 V	96%	2.045" x 1.045" x 0.357" (51.94 x 26.54 x 9.07)	PTH12040WAD
60 A	2.95-2.5 Vdc	0.8-2.5 V	96%	2.045" x 1.045" x 0.357" (51.94 x 26.54 x 9.07)	PTH04040WAD

* Mounting Option Suffix:
D Horizontal through-hole (RoHS 6/6)
Z Surface-mount solder ball (RoHS 6/6)

On-board AC-DC Distributed Architecture

- High power and high density AC-DC building blocks for quick-turn and modular power solutions
- Alternative power solutions vs. custom development approach
- No fans and high reliability (1M hours MTBF)
- Suitable for harsh temperature conditions (-40 °C startup/-20 °C to 100 °C operating temperature)
- RTCA-DO Compliant for some AIQ/AIT models

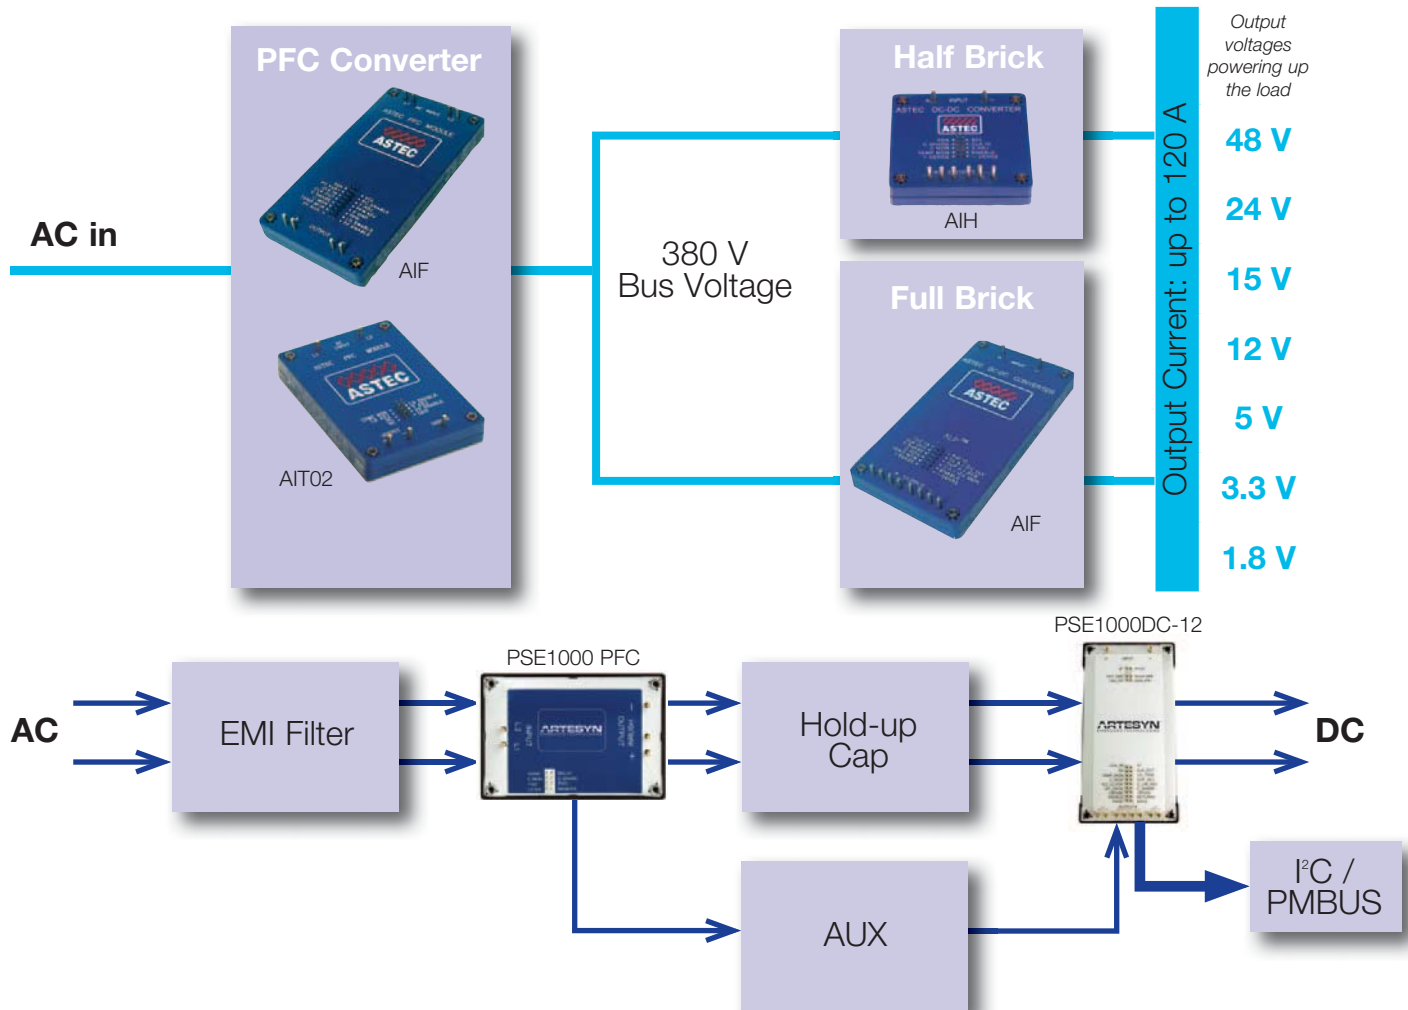

Power Factor Correction (PFC)

AIF04ZPFC
1600 WAIT02ZPFC
720 W

PSE1000PFC

AIQ00ZPFC
75 W

Special Features

- 1600 W/720 W/75 W
- Unity power factor
- Universal input and frequency range
- Positive and negative enable
- Paralleling with current share
- IEC 1000-3.2 compliance
- 100 °C baseplate
- Clock synch (in/out)
- Current monitoring
- Vout adjust
- On/off enable
- Remote sense
- 95% efficiency
- Fast transient response

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
PFC Module - Baseplate					
380 V	4.2 A	85-264 Vac	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	95%	AIF04ZPFC-01L
380 V	4.2 A	85-264 Vac	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	95%	AIF04ZPFC-02L
393 V	0.25 A	100-122 Vac	2.3" x 1.45" x 0.5" (58.42 x 36.83 x 12.7)	90%	AIQ00ZPFC-01NL
393 V	2.08 A	85-264 Vac	3.5" x 2.4" x 0.5" (88.9 x 60.96 x 12.7)	93%	AIT02ZPFC-01NL
390 V	2.56 A	90-264 Vac	3.5" x 2.4" x 1" (88.9 x 60.96 x 25.4)	94%	PSE1000PFC*

*85°C temperature

High Power 300 Vin



300 V input 65-600 W output

Special Features

- 300 V input (250-420 V PFC-ready)
- 2nd generation product
- Standard through-hole termination
- Power density > 100 W/in³
- 100 °C max baseplate operating temperature
- Embedded controls on secondary side (Full- and Half-brick):
 - Temp monitor
 - Current sharing
 - Power good signal
 - Current limit & OVP adjust

	Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
AIF 300 Vin Full-Brick – Baseplate						
	1.8 V	120 A	300 V (250-420 V)	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	80%	AIF120Y300-L
	3.3 V	120 A	300 V (250-420 V)	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	87%	AIF120F300-L
	5 V	80 A	300 V (250-420 V)	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	90%	AIF80A300-L
	12 V	50 A	300 V (250-420 V)	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	90%	AIF50B300-L
	15 V	40 A	300 V (250-420 V)	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	90%	AIF40C300-L
	24 V	25 A	300 V (250-420 V)	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	90%	AIF25H300-L
	48 V	12 A	300 V (250-420 V)	4.6" x 2.4" x 0.5" (116.84 x 60.96 x 12.7)	91%	AIF12W300-L
PSE1000DC Full-Brick – Baseplate						
NEW!	12 V	83 A	370-390 V	4.6" x 2.4" x 1" (116.84 x 60.96 x 25.4)		PSE1000DC-12*
AIT 300 Vin Three-Quarter-Brick – Baseplate						
	28 V/3.3 V	3.9 A/4.5 A	390 V (375-410 V)	3.6" x 2.4" x 0.5" (91.44 x 60.96 x 12.7)	87%	AIT04RF300-L
AIH 300 Vin Half-Brick – Baseplate						
	1.8 V	50 A	300 V (250-420 V)	2.3" x 2.4" x 0.5" (58.42 x 60.96 x 12.7)	80%	AIH50Y300-L
	3.3 V	50 A	300 V (250-420 V)	2.3" x 2.4" x 0.5" (58.42 x 60.96 x 12.7)	85%	AIH50F300-L
	5 V	40 A	300 V (250-420 V)	2.3" x 2.4" x 0.5" (58.42 x 60.96 x 12.7)	88%	AIH40A300-L
	12 V	20 A	300 V (250-420 V)	2.3" x 2.4" x 0.5" (58.42 x 60.96 x 12.7)	90%	AIH20B300-L
	15 V	16 A	300 V (250-420 V)	2.3" x 2.4" x 0.5" (58.42 x 60.96 x 12.7)	90%	AIH16C300-L
	24 V	10 A	300 V (250-420 V)	2.3" x 2.4" x 0.5" (58.42 x 60.96 x 12.7)	90%	AIH10H300-L
AIQ 300 Vin Quarter-Brick – Baseplate						
	28 V	2.32 A	300 V (250-420 V)	2.3" x 1.45" x 0.5" (58.42 x 36.83 x 12.7)	89%	AIQ02R300L

* 85°C temperature

Low Power Isolated DC-DC Product



Special Features

- Input voltages 9-36 V, 18-36 V, 18-75 V and 36-75 V
- Single and dual outputs
- Power 3-50 W
- Regulated outputs
- Overcurrent protection
- Operating temperature -40 °C to 71 °C (ambient)
- 1500 Vdc isolation
- CE Mark Safety
- UL Approval (Except AET Series)

NEW! 3 W

Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
Enclosed					
24 V (9-36 V)	5 V @ 0.6 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	78%	ATA00A18-L
24 V (9-36 V)	5 V @ 0.6 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	78%	ATA00A18S-L
48 V (18-75 V)	5 V @ 0.6 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	78%	ATA00A36-L
48 V (18-75 V)	5 V @ 0.6 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	78%	ATA00A36S-L
24 V (9-36 V)	+/-5 V @ 0.3 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	77%	ATA00AA18-L
24 V (9-36 V)	+/-5 V @ 0.3 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	77%	ATA00AA18S-L
48 V (18-75 V)	+/-5 V @ 0.3 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	77%	ATA00AA36-L
48 V (18-75 V)	+/-5 V @ 0.3 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	77%	ATA00AA36S-L
24 V (9-36 V)	12 V @ 0.25 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00B18-L
24 V (9-36 V)	12 V @ 0.25 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00B18S-L
48 V (18-75 V)	12 V @ 0.25 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00B36-L
48 V (18-75 V)	12 V @ 0.25 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00B36S-L
24 V (9-36 V)	+/-12 V @ 0.125 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00BB18-L
24 V (9-36 V)	+/-12 V @ 0.125 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00BB18S-L
48 V (18-75 V)	+/-12 V @ 0.125 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00BB36-L
48 V (18-75 V)	+/-12 V @ 0.125 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00BB36S-L
24 V (9-36 V)	15 V @ 0.2 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00C18-L
24 V (9-36 V)	15 V @ 0.2 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00C18S-L
48 V (18-75 V)	15 V @ 0.2 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00C36-L
48 V (18-75 V)	15 V @ 0.2 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00C36S-L
24 V (9-36 V)	+/-15 V @ 0.1 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00CC18-L
24 V (9-36 V)	+/-15 V @ 0.1 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00CC18S-L
48 V (18-75 V)	+/-15 V @ 0.1 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00CC36-L
48 V (18-75 V)	+/-15 V @ 0.1 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00CC36S-L
24 V (9-36 V)	3 V 3 @ 0.6 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	75%	ATA00F18-L
24 V (9-36 V)	3 V 3 @ 0.6 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	75%	ATA00F18S-L
48 V (18-75 V)	3 V 3 @ 0.6 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	75%	ATA00F36-L
48 V (18-75 V)	3 V 3 @ 0.6 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	75%	ATA00F36S-L
24 V (9-36 V)	24 V @ 0.125 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00H18-L
24 V (9-36 V)	24 V @ 0.125 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00H18S-L
48 V (18-75 V)	24 V @ 0.125 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8)	1500 Vdc	80%	ATA00H36-L
48 V (18-75 V)	24 V @ 0.125 A	0.94" x 0.54" x 0.31" (23.8 x 13.7 x 8) SMT	1500 Vdc	80%	ATA00H36S-L

	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
6 W	Enclosed					
	9-36 V	12 V @ 0.5 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	82%	ASA00B18-LS
	9-36 V	15 V @ 0.4 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	83%	ASA00C18-LS
	9-36 V	5 V @ 1 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	81%	ASA01A18-LS
	9-36 V	3.3 V @ 1.2 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	78%	ASA01F18-LS
	9-36 V	5 V @ ±0.5 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	81%	ASA00AA18-LS
	9-36 V	12 V @ ±0.25 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	82%	ASA00BB18-LS
	9-36 V	15 V @ ±0.2 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	83%	ASA00CC18-LS
	18-75 V	12 V @ 0.5 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	82%	ASA00B36-LS
	18-75 V	15 V @ 0.4 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	83%	ASA00C36-LS
	18-75 V	5 V @ 1 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	81%	ASA01A36-LS
	18-75 V	3.3 V @ 1.2 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	78%	ASA01F36-LS
	18-75 V	5 V @ ±0.5 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	81%	ASA00AA36-LS
	18-75 V	12 V @ ±0.25 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	82%	ASA00BB36-LS
	18-75 V	15 V @ ±0.2 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	83%	ASA00CC36-LS
10 W	Enclosed					
	18-36 V	12 V @ 0.835 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	83%	ASA00B24-LS
	18-36 V	5 V @ 2 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	82%	ASA02A24-LS
	18-36 V	3.3 V @ 3 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	79%	ASA03F24-LS
	18-36 V	2.5 V @ 3 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	77%	ASA03G24-LS
	36-75 V	12 V @ 0.835 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	83%	ASA00B48-LS
	36-75 V	5 V @ 2 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	82%	ASA02A48-LS
	36-75 V	3.3 V @ 3 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	79%	ASA03F48-LS
	36-75 V	2.5 V @ 3 A	DIP 1.25" x 0.8" x 0.4" (31.75 x 20.32 x 10.16)	1500 Vdc	87%	ASA03G48-LS
15 W	Enclosed					
	9-36 V	12 V @ 1.25 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	84%	AEE01B18-LS
	9-36 V	15 V @ 1 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	84%	AEE01C18-LS
	9-36 V	3.3 V @ 4 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	80%	AEE04F18-LS
	9-36 V	5 V @ 3 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	84%	AEE03A18-LS
	9-36 V	12 V @ ±0.625 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	83%	AEE00BB18-LS
	9-36 V	15 V @ ±0.5 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	83%	AEE00CC18-LS
	9-36 V	5 V @ ±1.5 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	79%	AEE01AA18-LS
	18-75 V	12 V @ 1.25 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	84%	AEE01B36-LS
	18-75 V	15 V @ 1 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	84%	AEE01C36-LS
	18-75 V	3.3 V @ 4 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	80%	AEE04F36-LS
	18-75 V	5 V @ 3 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	84%	AEE03A36-LS
	18-75 V	12 V @ ±0.625 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	83%	AEE00BB36-LS
	18-75 V	15 V @ ±0.5 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	83%	AEE00CC36-LS
	18-75 V	5 V @ ±1.5 A	1" x 2" x 0.44" (25.4 x 50.8 x 11.30)	1500 Vdc	79%	AEE01AA36-LS



	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
20 W	Enclosed					
	9-36 V	2.5 V @ 6 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	79%	AET06G18-L
	9-36 V	3.3 V @ 6 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	83%	AET06F18-L
	9-36 V	5 V @ 4 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	84%	AET04A18-L
	9-36 V	12 V @ 1.67 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET01B18-L
	9-36 V	15 V @ 1.33 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET01C18-L
	9-36 V	5 V @ ±2 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	84%	AET02AA18-L
	9-36 V	12 V @ ±0.835 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET00BB18-L
	9-36 V	15 V @ ±0.665 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET00CC18-L
	18-75 V	2.5 V @ 6 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	79%	AET06G36-L
	18-75 V	3.3 V @ 6 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	83%	AET06F36-L
	18-75 V	5 V @ 4 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	84%	AET04A36-L
	18-75 V	12 V @ 1.67 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET01B36-L
	18-75 V	15 V @ 1.33 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET01C36-L
	18-75 V	5 V @ ±2 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	84%	AET02AA36-L
	18-75 V	12 V @ ±0.835 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET00BB36-L
	18-75 V	15 V @ ±0.665 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET00CC36-L
30 W	Enclosed					
	9-36 V	2.5 V @ 8 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	79%	AET08G18-L
	9-36 V	3.3 V @ 7 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	82%	AET07F18-L
	9-36 V	5 V @ 6 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	84%	AET06A18-L
	9-36 V	12 V @ 2.5 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET02B18-L
	9-36 V	15 V @ 2 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET02C18-L
	9-36 V	12 V @ ±1.25 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET01BB18-L
	9-36 V	15 V @ ±1 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET01CC18-L
	18-75 V	2.5 V @ 8 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	79%	AET08G36-L
	18-75 V	3.3 V @ 7 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	82%	AET07F36-L
	18-75 V	5 V @ 6 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	84%	AET06A36-L
	18-75 V	12 V @ 2.5 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET02B36-L
	18-75 V	15 V @ 2 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET02C36-L
	18-75 V	12 V @ ±1.25 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET01BB36-L
	18-75 V	15 V @ ±1 A	1.6" x 2" x 0.48" (40.6 x 50.8 x 12.19)	1500 Vdc	85%	AET01CC36-L

NEW! 40 W

Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
Enclosed					
9 - 36 Vin	3.3 V @ 8 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	89%	AEE08F18-L
9 - 36 Vin	5 V @ 8 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	90%	AEE08A18-L
9 - 36 Vin	12 V @ 3.33 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	89%	AEE03B18-L
9 - 36 Vin	15 V @ 2.67 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	89%	AEE02C18-L
9 - 36 Vin	24 V @ 1.67 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	91%	AEE01H18-L
9 - 36 Vin	+/-12 V @ 1.67 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	88%	AEE01BB18-L
9 - 36 Vin	+/-15 V @ 1.67 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	88%	AEE01CC18-L
18 - 75 Vin	3.3 V @ 8 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	89%	AEE08F36-L
18 - 75 Vin	5 V @ 8 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	90%	AEE08A36-L
18 - 75 Vin	12 V @ 3.33 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	90%	AEE03B36-L
18 - 75 Vin	15 V @ 2.67 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	90%	AEE02C36-L
18 - 75 Vin	24 V @ 1.67 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	91%	AEE01H36-L
18 - 75 Vin	+/-12 V @ 1.67 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	88%	AEE01BB36-L
18 - 75 Vin	+/-15 V @ 1.67 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	88%	AEE01CC36-L

NEW! 50 W

Enclosed					
9 - 36 Vin	3.3 V @ 10 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	90%	AEE10F18-L
9 - 36 Vin	5 V @ 10 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	91%	AEE10A18-L
9 - 36 Vin	12 V @ 4.17 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	92%	AEE04B18-L
9 - 36 Vin	15 V @ 3.33 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	92%	AEE03C18-L
9 - 36 Vin	24 V @ 2.08 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	91%	AEE02H18-L
18 - 75 Vin	3.3 V @ 10 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	90%	AEE10F36-L
18 - 75 Vin	5 V @ 10 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	91%	AEE10A36-L
18 - 75 Vin	12 V @ 4.17 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	92%	AEE04B36-L
18 - 75 Vin	15 V @ 3.33 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	92%	AEE03C36-L
18 - 75 Vin	24 V @ 2.08 A	2" X 1" X 0.4" (25.4 X 50.8 X 10.2)	1500 Vdc	91%	AEE02H36-L



Low Power Isolated DC-DC Product



AXA00H18-L

Special Features

- Package size 1.0" x 1.0" x 0.4"
- Ultra-wide 4:1 input range: 9 - 36 Vin, 18 - 75 Vin
- Very high efficiency up to 90%
- Operating temperature range: -40 °C to + 85 °C
- Output voltage adjustable
- I/O isolation voltage 1500 VDC
- Remote ON/OFF control
- Metal case with isolated baseplate

	Input Voltage	Output Voltage	Power	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
10 W	9 - 36 Vdc	3.3 V @ 2.2 A	7 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	86%	AXA02F18-L
	9 - 36 Vdc	5 V @ 2 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	84%	AXA02A18-L
	9 - 36 Vdc	12 V @ 0.83 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	86%	AXA00B18-L
	9 - 36 Vdc	15 V @ 0.66 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	87%	AXA00C18-L
	9 - 36 Vdc	24 V @ 0.41 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	86%	AXA00H18-L
	9 - 36 Vdc	+/-5V @ +/- 1 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	84%	AXA00AA18-L
	9 - 36 Vdc	+/-12V @ +/- 0.41 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	86%	AXA00BB18-L
	9 - 36 Vdc	+/-15V @ +/- 0.33 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	87%	AXA00CC18-L
	18 - 75 Vdc	3.3 V @ 2.2 A	7 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	86%	AXA02F36-L
	18 - 75 Vdc	5 V @ 2 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	84%	AXA02A36-L
	18 - 75 Vdc	12 V @ 0.83 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	86%	AXA00B36-L
	18 - 75 Vdc	15 V @ 0.66 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	87%	AXA00C36-L
	18 - 75 Vdc	24 V @ 0.41 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	86%	AXA00H36-L
	18 - 75 Vdc	+/-5V @ +/- 1 A	10 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	84%	AXA00AA36-L
20 W	9 - 36 Vdc	3 V 3 @ 4.5 A	15 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	87%	AXA04F18-L
	9 - 36 Vdc	5 V @ 4 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA04A18-L
	9 - 36 Vdc	12 V @ 1.67 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA01B18-L
	9 - 36 Vdc	15 V @ 1.33 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA01C18-L
	9 - 36 Vdc	24 V @ 0.835 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	88%	AXA00H18-L
	9 - 36 Vdc	±12 V @ 0.835 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA00BB18-L
	9 - 36 Vdc	±15 V @ 0.67 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA00CC18-L
	18 - 75 Vdc	3 V 3 @ 4.5 A	15 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	88%	AXA04F36-L
	18 - 75 Vdc	5 V @ 4 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA04A36-L
	18 - 75 Vdc	12 V @ 1.67 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA01B36-L
	18 - 75 Vdc	15 V @ 1.33 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA01C36-L
	18 - 75 Vdc	24 V @ 0.835 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	88%	AXA00H36-L
	18 - 75 Vdc	±12 V @ 0.835 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA00BB36-L
	18 - 75 Vdc	±15 V @ 0.67 A	20 W	1" x 1" x 0.4" (25.4 x 25.4 x 10.16)	1500 Vdc	89%	AXA00CC36-L

DC-DC Converter for Railway Application



ERM50 / ERM75

	Input Voltage	Output	Package	I/O Isolation	Efficiency	Model Number
NEW! 10 W	24 (9 - 36 V)	5 V @ 2 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	84%	ERM02A18
	24 (9 - 36 V)	12 V @ 0.83 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	86%	ERM00B18
	24 (9 - 36 V)	15 V @ 0.67 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	86%	ERM00C18
	24 (9 - 36 V)	24 V @ 0.41 A	2" x 1" x 0.43" (50.8 x 25.4 x 11)	2250 Vdc	85%	ERM00H18
	48 (18 - 75 V)	5 V @ 2 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	84%	ERM02A36
	48 (18 - 75 V)	12 V @ 0.83 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	86%	ERM00B36
	48 (18 - 75 V)	15 V @ 0.67 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	86%	ERM00C36
	48 (18 - 75 V)	24 V @ 0.41 A	2" x 1" x 0.43" (50.8 x 25.4 x 11)	2250 Vdc	85%	ERM00H36
	72, 110 (40 - 160 V)	5 V @ 2 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	82%	ERM02A110
	72, 110 (40 - 160 V)	12 V @ 0.83 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	85%	ERM00B110
	72, 110 (40 - 160 V)	15 V @ 0.67 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	85%	ERM00C110
	72, 110 (40 - 160 V)	24 V @ 0.41 A	2" x 1" x 0.43" (50.8 x 25.4 x 11)	2250 Vdc	84%	ERM00H110
NEW! 20 W	24 (9 - 36 V)	5 V @ 4 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	85%	ERM04A18
	24 (9 - 36 V)	12 V @ 1.67 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	87%	ERM01B18
	24 (9 - 36 V)	15 V @ 1.33 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	87%	ERM01C18
	24 (9 - 36 V)	24 V @ 0.833 A	2" x 1" x 0.43" (50.8 x 25.4 x 11)	2250 Vdc	86%	ERM01H18
	48 (18 - 75 V)	5 V @ 4 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	85%	ERM04A36
	48 (18 - 75 V)	12 V @ 1.67 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	87%	ERM01B36
	48 (18 - 75 V)	15 V @ 1.33 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	87%	ERM01C36
	48 (18 - 75 V)	24 V @ 0.833 A	2" x 1" x 0.43" (50.8 x 25.4 x 11)	2250 Vdc	86%	ERM01H36
	72, 110 (40 - 160 V)	5 V @ 4 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	83%	ERM04A110
	72, 110 (40 - 160 V)	12 V @ 1.67 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	86%	ERM01B110
	72, 110 (40 - 160 V)	15 V @ 1.33 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	2250 Vdc	86%	ERM01C110
	72, 110 (40 - 160 V)	24 V @ 0.833 A	2" x 1" x 0.43" (50.8 x 25.4 x 11)	2250 Vdc	85%	ERM01H110
50 W	72 (43 - 101)	5 V @ 10 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	90%	ERM10A72
	72 (43 - 101)	12 V @ 4.17 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	92%	ERM04B72
	72 (43 - 101)	15 V @ 3.33 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	92%	ERM03C72
	72 (43 - 101)	24 V @ 2.08 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	91%	ERM02H72
	110 (66 - 160)	5 V @ 10 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	90%	ERM10A110
	110 (66 - 160)	12 V @ 4.17 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	91%	ERM04B110
	110 (66 - 160)	15 V @ 3.33 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	92%	ERM03C110
	110 (66 - 160)	24 V @ 2.08 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	91%	ERM02H110
75 W	72 (43 - 101)	5 V @ 15 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	89%	ERM15A72
	72 (43 - 101)	12 V @ 6.25 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	92%	ERM06B72
	72 (43 - 101)	15 V @ 5 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	92%	ERM05C72
	72 (43 - 101)	24 V @ 3.125 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	91%	ERM03H72
	110 (66 - 160)	5 V @ 15 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	89%	ERM15A110
	110 (66 - 160)	12 V @ 6.25 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	91%	ERM06B110
	110 (66 - 160)	15 V @ 5 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	91%	ERM05C110
	110 (66 - 160)	24 V @ 3.125 A	2.28" x 1.45" x 0.5" (57.9 x 36.8 x 12.7)	3000 Vac rms	90%	ERM03H110

DC-DC Converter for Medical Application



Special Features

Medical Safety to UL / CSA / IEC / EN 60601-1 3rd Edition

- 4200 VAC reinforced insulation
- 2 MOOP rated
- Low leakage current

- Operating Temperature Range -40 °C to +85 °C (with derating)
- Input filter meet EN 55022, Class A and FCC, Level A
- 3 years product warranty

NEW! 8 W
NEW! 10 W

Input Voltage	Output 1 Voltage	Output 2 Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Artesyn Part number
9 - 18 V	5 V @ 1.6 A		2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	76%	AEE01A12-M
9 - 18 V	12 V @ 0.835 A		2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	80%	AEE00B12-M
9 - 18 V	12 V @ 0.417 A	-12 V @ 0.417 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	80%	AEE00BB12-M
9 - 18 V	15 V @ 0.333 A	-15 V @ 0.333 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	81%	AEE00CC12-M
18 - 36 V	5 V @ 2 A		2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	77%	AEE02A24-M
18 - 36 V	12 V @ 0.835 A		2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	81%	AEE00B24-M
18 - 36 V	12 V @ 0.417 A	-12 V @ 0.417 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	81%	AEE00BB24-M
18 - 36 V	15 V @ 0.333 A	-15 V @ 0.333 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	82%	AEE00CC24-M
36 - 75 V	5 V @ 2 A		2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	77%	AEE02A48-M
36 - 75 V	12 V @ 0.835 A		2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	81%	AEE00B48-M
36 - 75 V	12 V @ 0.417 A	-12 V @ 0.417 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	81%	AEE00BB48-M
36 - 75 V	15 V @ 0.333 A	-15 V @ 0.333 A	2" x 1" x 0.4" (50.8 x 25.4 x 10.2)	4200 VACrms	82%	AEE00CC48-M





Rapid Modification and Value-Added Solutions

Why use a Modified Standard Power Supply?

Time-to-market, reliability and costs have the greatest impact on your ROI. Fully custom solutions can delay your time-to-market and undermine your competitive advantage. So why pay custom development costs when Artesyn can deliver a modified standard power supply sample the way you want it, delivered in days at a standard price.

Artesyn has you Covered!

No matter what type of power supply you need, Artesyn has you covered!

While Artesyn Embedded Technologies offers a broad range of standard products that address the needs of many industries, there are occasions when a standard product does not address all your application requirements. Also, a custom solution does not always make economic sense, especially in terms of your schedule needs. This is where the knowledge and expertise of Artesyn really pays dividends. By using proven standard platforms as building blocks, we can develop cost-effective turnkey power solutions that meet your exact needs.

- Sample lead time varies with complexity.

Rapid Modification

Simple to Complex Modifications – Initial Samples Can be Available in Days!

Value-Add & Changes Made

- Modified output termination from single to 3-way contact
- AC_OK and POK Logic and timing signal changes via firmware
- Custom enclosure and accessories
- Ruggedization for shock and vibration
- Firmware changes for heavy peak loading startup; and load adaptive fan speed.

Modified Advantage

What you will get from Artesyn's modified power supplies:

- Broad portfolio of power supplies to leverage from
- Quick time to market vs. custom solutions
- Low risk - using proven reliable platforms as building blocks
- Cost effective (Lower development cost)
- Quality, high reliability products





Modified Solutions

Artesyn provides modified standard products and value-add solutions in varying degrees of complexity. These meet specific customer needs in a wide range of applications, such as:



Communications

- Access Solutions
- Enterprise Networking
- Wireless Communications
- Wireline Communications
- Optical Communications




Healthcare

- Bio Life Sciences
- Dental
- Imaging
- Laboratory
- Medical



Industrial

- Process Control
- Robotics
- Test & Measurement



Lighting & Signage

- Displays
- Illuminated Signs



Mil/Aero (COTS)

- Avionics
- In-flight Entertainment

Capabilities

The exact specifications you require that's within your budget

Electrical Parameters

- Factory Vout Preset
- Low Noise
- Power & Efficiency Upgrades
- Hot Swap Control
- Inrush Current Control
- Integrated PDU Assemblies
- Compliance to Industry Standards



Connectivity

- Cable Wire Assemblies
- Connector Changes
- Busbar Design
- Overmoulding
- Interposer Boards



Packaging

- Conformal Coating
- Custom Chassis/Sled
- Ruggedization for Shock, Vibration and Hazardous Locations
- Shielding for High Magnetic Environment
- Sealed/IP Rated Enclosures
- Customized Print/Marking/Labels



Communications & Control

- Logic Signal/Timing Changes
- Adaptive Fan Control
- Output Sequencing
- Peak Load/Efficiency Optimization



Terms and Conditions of Sale

The Artesyn Embedded Technologies company that accepts Buyer's order for Goods is herein referred to as the "Seller" and the person or entity purchasing goods or services ("Goods") and/or licensing software and/or firmware which are preloaded, or to be loaded into Goods ("Software") from Seller is referred to as the "Buyer." These Terms and Conditions, any price list or schedule, quotation, acknowledgment or invoice from Seller relevant to the sale of the Goods and licensing of Software and all documents incorporated by specific reference herein or therein constitute the complete and exclusive statement of the terms governing the sale of Goods and license of Software by Seller to Buyer. Seller's acceptance of Buyer's purchase order is expressly conditional on Buyer's assent to all of Seller's terms and conditions of sale, including terms and conditions that are different from or additional to the terms and conditions of Buyer's purchase order. Buyer's acceptance of the Goods and/or Software will manifest Buyer's assent to these Terms and Conditions. Seller reserves the right in its sole discretion to refuse orders. Notwithstanding anything to the contrary, in the event that the provisions of these Terms and Conditions conflict with the provisions of an effective agreement signed by a duly authorized representative of both parties ("Effective Agreement") that applies to the transaction(s) contemplated herein, the Effective Agreement shall control.

1. PRICES: Unless otherwise specified in writing by Seller, the price quoted or specified by Seller for the Goods and/or Software shall remain in effect for 30 days after the date of Seller's quotation or acknowledgment of Buyer's order for the Goods and/or Software, whichever occurs first, provided an unconditional authorization from Buyer for the shipment of the Goods and/or Software is received and accepted by Seller within such time period. If such authorization is not received by Seller within such 30 day period, Seller shall have the right to change the price for the Goods and/or Software to Seller's price for the Goods and/or Software at the time of shipment. All prices and licensee fees are exclusive of taxes, transportation and insurance, which are to be borne by Buyer.

2. TAXES: Any current or future tax or governmental charge (or increase in same) affecting Seller's costs of production, sale, or shipment, or which Seller is otherwise required to pay or collect in connection with the sale, purchase, delivery, storage, processing, use or consumption of Goods, shall be for Buyer's account and shall be added to the price or billed to Buyer separately, at Seller's election.

3. TERMS OF PAYMENT: Unless otherwise specified by Seller, terms are net 30 days from date of Seller's invoice by bank wire transfer or automated clearing house in U.S. currency. Payment will be made no less frequent than weekly. Seller shall have the right, among other remedies, either to terminate this agreement or to suspend further performance under this and/or other agreements with Buyer in the event Buyer fails to make any payment when due, which other agreements Buyer and Seller hereby amend accordingly. Buyer shall be liable for all expenses, including attorneys' fees, relating to the collection of past due amounts. If any payment owed to Seller is not paid when due, it shall bear interest, at a rate to be determined by Seller, which shall not exceed the maximum rate permitted by law, from the date on which it is due until it is paid. Any payment due to either party under this agreement shall be made in full without any set-off, restriction, condition deduction or withholding for or on account of any counterclaim. Should Buyer's financial responsibility become unsatisfactory to Seller, cash payments or security satisfactory to Seller may be required by Seller for future deliveries of the Goods and/or Software. If such cash payment or security is not provided, in addition to Seller's other rights and remedies, Seller may discontinue deliveries.

4. SHIPMENT AND DELIVERY: While Seller will use all reasonable commercial efforts to maintain the delivery date(s) acknowledged or quoted by Seller, all shipping dates are approximate and not guaranteed. Seller

reserves the right to make partial shipments. Seller, at its option, shall not be bound to tender delivery of any Goods and/or Software for which Buyer has not provided shipping instructions and other required information. If the shipment of the Goods and/or Software is postponed or delayed by Buyer for any reason, Buyer agrees to reimburse Seller for any and all storage costs and other additional expenses resulting therefrom. Risk of loss and legal title to the Goods shall transfer from Seller to Buyer upon delivery to and receipt by carrier at Seller's shipping point. Unless otherwise specified by Seller, all shipments are F.C.A. Seller's shipping point (Incoterms 2010). Any claims for shortages or damages suffered in transit are the responsibility of Buyer and shall be submitted by Buyer directly to the carrier. Shortages or damages must be identified and signed for at the time of delivery.

Buyer shall inspect Goods delivered to it by Seller immediately upon receipt, and, any course of dealing to the contrary notwithstanding, failure of Buyer to give Seller notice of any claim within 10 days after receipt of such Goods shall be an unqualified acceptance of such Goods.

5. LIMITED WARRANTY: Subject to the limitations of Section 6 and unless otherwise specified by Seller in writing, Seller warrants that the Goods manufactured by Seller will be free from defects in material and workmanship and substantially meet Seller's published specifications at the time of shipment under normal use and regular service and maintenance for (a) the period specified in Seller's then current product data sheets from the date of manufacture by Seller for standard Embedded Power Goods, (b) 2 years from initial shipment for standard Embedded Computing Goods, and (c) the period specified by Seller in writing for custom Embedded Power Goods and custom Embedded Computing Goods. Unless otherwise stated in a separate Software license agreement, Seller makes no warranty as to any Software. THE WARRANTIES SET FORTH IN SECTIONS 5 AND 7 ARE THE SOLE AND EXCLUSIVE WARRANTIES GIVEN BY SELLER WITH RESPECT TO THE GOODS AND SOFTWARE AND ARE IN LIEU OF AND EXCLUDE ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARISING BY OPERATION OF LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHETHER OR NOT THE PURPOSE OR USE HAS BEEN DISCLOSED TO SELLER IN SPECIFICATIONS, DRAWINGS OR OTHERWISE, AND WHETHER OR NOT SELLER'S PRODUCTS ARE SPECIFICALLY DESIGNED AND/OR MANUFACTURED BY SELLER FOR BUYER'S USE OR PURPOSE.

These warranties do not extend to any losses or damages due to misuse, accident, abuse, neglect, negligence (other than Seller's), unauthorized modification or alteration, use beyond rated capacity, unsuitable power sources or environmental conditions, improper installation, repair, handling, maintenance or application or any other cause not the fault of Seller. To the extent that Buyer or its agents have supplied specifications, information, representation of operating conditions or other data to Seller in the selection or design of the Goods and the preparation of Seller's quotation, and in the event that actual operating conditions or other conditions differ from those represented by Buyer, any warranties or other provisions contained herein that are affected by such conditions shall be null and void.

If within 30 days after Buyer's discovery of any warranty defects within the warranty period, Buyer notifies Seller thereof in writing, Seller shall, at its option and as Buyer's exclusive remedy, repair, correct or replace per its return policy, or refund the purchase price for, that portion of the Goods found by Seller to be defective. Failure by Buyer to give such written notice within the applicable time period shall be deemed an absolute and unconditional waiver of Buyer's claim for such defects. Advance written permission to return Goods must be obtained from Seller. Such Goods must be shipped transportation prepaid to Seller. Returns made without proper written permission will not be accepted by Seller. Seller reserves the right

to inspect Goods prior to authorizing return. Goods repaired or replaced during the warranty period shall be covered by the foregoing warranties for the remainder of the original warranty period or 90 days from the date of shipment, whichever is longer.

Buyer assumes all other responsibility for any loss, damage, or injury to persons or property arising out of, connected with, or resulting from the use of Goods and/or Software, either alone or in combination with other products/components.

PRE-PRODUCTION (Prototype, Engineering Verification Test, or Design Verification Test) UNITS ARE SOLD "WHERE IS, AS IS, WITH ALL FAULTS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR INTENDED PURPOSE.

6. LIMITATION OF REMEDY AND LIABILITY: THE SOLE AND EXCLUSIVE REMEDY FOR BREACH OF ANY WARRANTY HEREUNDER (OTHER THAN THE WARRANTY PROVIDED UNDER SECTION 7) SHALL BE LIMITED TO REPAIR, CORRECTION OR REPLACEMENT, OR REFUND OF THE PURCHASE PRICE UNDER SECTION 5.

SELLER SHALL NOT BE LIABLE FOR DAMAGES CAUSED BY DELAY IN PERFORMANCE AND THE REMEDIES OF BUYER SET FORTH IN THIS AGREEMENT ARE EXCLUSIVE. IN NO EVENT, REGARDLESS OF THE FORM OF THE CLAIM OR CAUSE OF ACTION (WHETHER BASED IN CONTRACT, INFRINGEMENT, NEGLIGENCE, STRICT LIABILITY, OTHER TORT OR OTHERWISE), SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXCEED THE PRICE PAID BY BUYER FOR THE SPECIFIC GOODS OR SOFTWARE PROVIDED BY SELLER GIVING RISE TO THE CLAIM OR CAUSE OF ACTION. BUYER AGREES THAT IN NO EVENT SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXTEND TO INCLUDE INCIDENTAL, CONSEQUENTIAL OR PUNITIVE DAMAGES. The term "consequential damages" shall include, but not be limited to, loss of anticipated profits, business interruption, loss of use, revenue, reputation and data, costs incurred, including without limitation, for capital, fuel, power, cover and loss or damage to property or equipment.

It is expressly understood that any technical advice furnished by Seller with respect to the use of the Goods and/or Software is given without charge, and Seller assumes no obligation or liability for the advice given, or results obtained, all such advice being given and accepted at Buyer's risk.

7. PATENTS AND COPYRIGHTS: Subject to the limitations of the second paragraph of Section 6, Seller warrants that the Goods sold, except as are made specifically for Buyer according to Buyer's specifications, do not infringe any valid U.S. patent or copyright in existence as of the date of shipment. This warranty is given upon the condition that Buyer promptly notifies Seller of any claim or suit involving Buyer in which such infringement is alleged and cooperates fully with Seller and permits Seller to control completely the defense, settlement or compromise of any such allegation of infringement. Seller's warranty as to utility patents only applies to infringement arising solely out of the inherent operation according to Seller's specifications and instructions of such Goods. In the event such Goods are held to infringe such a U.S. patent or copyright in such suit, and / or the use of such Goods is enjoined, or in the case of a compromise or settlement by Seller, Seller shall have the right, at its option and expense, to procure for Buyer the right to continue using such Goods, or replace them with non-infringing Goods, or modify same to become non-infringing, or grant Buyer a credit for the depreciated value of such Goods and accept return of them. In the event of the foregoing or, if in Seller's opinion, Seller receives a credible allegation of infringement, Seller may also, at its option, cancel or suspend this agreement as to future deliveries of such Goods, without liability.

8. EXCUSE OF PERFORMANCE: Seller shall not be liable for delays in performance or for non-performance due to acts of God; acts of Buyer; war; fire; flood; weather; sabotage; epidemics; strikes or labor disputes; civil disturbances or riots; governmental requests, restrictions, allocations, laws, regulations, orders or actions; unavailability of or delays in transportation; default of suppliers; or unforeseen circumstances or any events or causes beyond Seller's reasonable control. Deliveries or other performance may be suspended for an appropriate period of time or canceled by Seller upon notice to Buyer in the event of any of the foregoing, but the balance of the agreement shall otherwise remain unaffected as a result of the foregoing.

If Seller determines that its ability to supply the total demand for the Goods, or to obtain material used directly or indirectly in the manufacture of the Goods, is hindered, limited or made impracticable due to causes set forth in the preceding paragraph, Seller may allocate its available supply of the Goods or such material (without obligation to acquire other supplies of any such Goods or material) among its purchasers on such basis as Seller determines to be equitable without liability for any failure of performance which may result therefrom.

9. RESCHEDULE/CANCELLATION: Unless otherwise agreed in writing by Seller, orders under this agreement may not be rescheduled or canceled by Buyer for any reason.

10. CHANGES: Buyer may request changes or additions to the Goods and/or Software consistent with Seller's specifications and criteria. In the event such changes or additions are accepted by Seller, Seller may revise the price, license fees and dates of delivery.

Seller reserves the right to change designs and specifications for the Goods and/or Software without prior notice to Buyer, except with respect to Goods and/or Software being made to order for Buyer. Seller shall have no obligation to install or make such change in any Goods and/or Software manufactured prior to the date of such change.

11. NUCLEAR/MEDICAL: GOODS AND SOFTWARE SOLD HEREUNDER ARE NOT FOR USE IN CONNECTION WITH ANY NUCLEAR, MEDICAL, LIFE-SUPPORT AND OTHER HIGH RISK APPLICATIONS WHERE GOODS OR SOFTWARE FAILURE COULD LEAD TO LOSS OF LIFE OR CATASTROPHIC PROPERTY DAMAGE. Buyer accepts Goods and Software with the foregoing understanding, agrees to communicate the same in writing to any subsequent purchasers or users and to defend, indemnify and hold harmless Seller from any claims, losses, suits, judgments and damages, including incidental and consequential damages, arising from such use, whether the cause of action be based in tort, contract or otherwise, including allegations that the Seller's liability is based on negligence or strict liability.

12. ASSIGNMENT: Buyer shall not assign its rights or delegate its duties hereunder or any interest herein without the prior written consent of Seller, and any such assignment, without such consent, shall be void.

13. SOFTWARE: Notwithstanding any other provision herein to the contrary, Seller or applicable third party licensor to Seller shall retain all rights of ownership and title in its respective Software, including without limitation all rights of ownership and title in its respective copies of such Software. Except as otherwise provided herein, Buyer is hereby granted a nonexclusive, non-transferable royalty free license to use the Software incorporated into the Goods solely for purposes of Buyer properly utilizing such Goods purchased from Seller. All other Software shall be furnished to, and used by, Buyer only after execution of Seller's (or the licensor's) applicable standard license agreement, the terms of which are incorporated herein by reference. The Software is Seller's own or Seller's supplier's proprietary information,

and Buyer and its employees and agents shall not disclose the Software to others without Seller's prior written consent.

14. TOOLING: Tool, die, and pattern charges, if any, are in addition to the price of the Goods and are due and payable upon completion of the tooling. All such tools, dies and patterns shall be and remain the property of Seller. Charges for tools, dies, and patterns do not convey to Buyer, title, ownership interest in, or rights to possession or removal, or prevent their use by Seller for other purchasers, except as otherwise expressly provided by Seller and Buyer in writing with reference to this provision.

15. INTELLECTUAL PROPERTY: Seller's intellectual property, including without limitation, all patents, copyrights, trade secrets, trade-dress and any other intellectual property of any kind (including without limitation, that which exists in the underlying technology), furnished by Seller to Buyer in connection with this agreement is the property of Seller and Seller retains all rights, including without limitation, exclusive rights of use, licensing, and sale. Possession of Goods, pre-production units, specifications, prints or drawings, or any other materials does not convey to Buyer any rights or license thereto.

16. BUYER'S COMPLIANCE WITH LAWS: In connection with the transactions contemplated by this agreement, Buyer is familiar with and shall fully comply with all applicable laws, regulations, rules and other requirements of the United States and of any applicable state, foreign and local governmental body in connection with the purchase, license, receipt, use, transfer and disposal of the Goods and/or Software.

17. EXPORT/IMPORT: Buyer agrees that all applicable import and export control laws, regulations, orders and requirements, including without limitation those of the United States and the European Union, and the jurisdictions in which the Seller and Buyer are established or from which Goods and/or Software may be supplied, will apply to their receipt and use. In no event shall Buyer use, transfer, release, import, export, Goods and/or Software in violation of such applicable laws, regulations, orders or requirements.

18. GOVERNMENT CONTRACT CONDITIONS: In the event Buyer supplies Goods or Software to the U.S. Government or to a prime contractor selling to the U.S. Government, the following Federal Acquisition Regulation (FAR) clauses are accepted by Seller and are made part of this agreement applicable to such supply: 52.222-21 Prohibition of Segregated Facilities; 52.222-26 Equal Opportunity; 52.222-35 Equal Opportunity For Special Disabled Veterans, Veterans of Vietnam Era, and Other Eligible Veterans; 52.222-36 Affirmative Action For Workers with Disabilities; and 52.219-8 Utilization of Small Business Concerns. No additional FAR or FAR Supplement clauses are accepted by Seller. In the event Buyer elects to sell Goods or Software to the U.S. Government or any national, state, provincial or local non-U.S. governmental entity or to a prime contractor selling to such entities, Buyer does so solely at its own option and risk, and agrees not to obligate Seller as a subcontractor or otherwise to the U.S. Government or other governmental entity except as described in this Section 18. Buyer remains solely and exclusively responsible for compliance with all statutes and regulations governing sales to the U.S. Government or any national, state, provincial or local non-U.S. governmental entity. Seller makes no representations, certifications or warranties whatsoever with respect to the ability of its Goods, Software, or prices to satisfy any such statutes and regulations.

19. GENERAL PROVISIONS: These terms and conditions supersede all other communications, negotiations and prior oral or written statements regarding the subject matter of these terms and conditions. No change, modification, rescission, discharge, abandonment, or waiver of these terms and conditions shall be binding upon the Seller unless made in writing and signed on its behalf by a duly authorized representative of Seller. No conditions, usage of trade, course of dealing or performance, understanding or agreement purporting to modify, vary, explain, or supplement these terms and conditions shall be binding unless hereafter made in writing and signed by the party to be bound, and no modification or additional terms shall be applicable to this agreement by Seller's receipt, acknowledgment, or acceptance of purchase orders, shipping instruction forms, or other documentation containing terms at variance with or in addition to those set forth herein. Any such modifications or additional terms are specifically rejected and deemed a material alteration hereof. If this document shall be deemed an acceptance of a prior offer by Buyer, such acceptance is expressly conditional upon Buyer's assent to any additional or different terms set forth herein. No waiver by either party with respect to any breach or default or of any right or remedy, and no course of dealing, shall be deemed to constitute a continuing waiver of any other breach or default or of any other right or remedy, unless such waiver be expressed in writing and signed by the party to be bound. All typographical or clerical errors made by Seller in any quotation, acknowledgment or publication are subject to correction. In the event that any provision or portion thereof contained in the Contract is held to be unenforceable, the Contract shall be construed without such provision or portion thereof.

(A) If Seller is a U.S. incorporated entity: This Agreement shall be governed by the laws of the State of Delaware, U.S.A., without reference to its choice or conflict of laws principles. The parties agree to submit to the exclusive jurisdiction of the courts of the State of Delaware for all actions arising in connection herewith.

(B) If Seller is a European incorporated entity: This Agreement shall be governed by the laws of England. Any dispute arising out of or in connection with this Agreement that cannot be resolved through friendly consultation shall be referred to and finally resolved by arbitration in London, England before the London Court of International Arbitration in accordance with its arbitration rules. The arbitral award shall be final and binding on the parties.

(C) If Seller is an entity incorporated in the Asia Pacific region: This Agreement shall be governed by the laws of the Hong Kong Special Administrative Region of the People's Republic of China. Any dispute arising out of or in connection with this Agreement that cannot be resolved through friendly consultation shall be referred to and finally resolved by arbitration in Hong Kong before the Hong Kong International Arbitration Centre in accordance with its arbitration rules. The arbitral award shall be final and binding on the parties.

(D) No action, regardless of form, arising out of transactions relating to this agreement, may be brought by either party more than two (2) years after the cause of action has accrued. The U.N. Convention on Contracts for the International Sales of Goods shall not apply to this agreement.


Revised February 11, 2016

Technology Index

Section	Page	Section	Page	Section	Page
Low Power		Medium Power		Industry Standard Non-Isolated	
LCC	15, 16, 17	MP	27, 28	APA	71
LPQ	12, 13, 14	Intelligent Medium Power		APC	71
LPS	9, 10, 11, 12, 13, 14	iMP	29, 30, 31	LDO	69
LPT	9, 10, 11, 12	Intelligent High Power		LGA	70
NLP	10, 11, 14	iVS	32, 33, 34	PTH	72
NPS	9, 10, 11	Precision High Power System		PTV	72
NTS	14	iHP	35, 36, 37	SIL	69, 70, 71
TLP	12	Bulk Power		SMT	69, 71
External Power		High Power		Low Power DC-DC Product	
AD	19	AIF	74	AEE	76, 78, 81
DA	18, 19	AIH	74	AET	77
DCH	18	AIQ	74	ASA	76
DP	19	AIT	74	AXA	79
DPS	19	PSE1000	74	DC-DC Converter for Railway Application	
Medical Power		Distributed Power		ERM	80
DA	24	DS	51-57	Industry Standard Isolated	
DP	24	Din Rail		AEO	65
DPS	24	ADN	59, 60	AGF	67
iHP	23	ADNB	58	AGQ	66
iMP	23	Industry Standard Isolated		ALD	63
iVS	23	AVE	67	ALO	64
LCC	22	AVO	64, 65, 67, 68	AVD	63
LCM	23	AVQ	66, 68	AVE	67
LPQ	22	IBC	66, 68	AVO	64, 65, 67, 68
LPS	20, 21, 22	LES	64, 65	AVQ	66, 68
LPT	20, 21	LQS	66, 70	IBC	66, 68
NLP	21, 22			LES	64, 65
NPS	20, 21			LQS	66, 70
NTS	22				
TLP	21				
μMP	23				
Micro Medium Power					
μMP	25, 26				

Ecosystem Leadership

Just as nature relies on communities of organisms functioning as an ecological unit, embedded power solutions depend on a broad and powerful ecosystem, including standards bodies, industry associations, technology alliances and engineering communities. Artesyn Embedded Technologies brings a wealth of innovation and many years' experience to accredited standards development organizations, specification consortia and industry associations through our executive memberships and key committee positions. We have long been committed to a strong ecosystem that works to further the development of the industries and technologies that are important to our customers' success.



Stay Connected.

The latest happenings are being posted on LinkedIn, Twitter, Facebook, Weibo and WeChat! Sign up for one or all of the sites below and stay connected with Artesyn Embedded Technologies!

www.linkedin.com/company/artesyn
www.facebook.com/artesynembedded
www.twitter.com/artesynembedded
www.youtube.com/user/artesynembedded
www.weibo.com/artesynchina

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit <http://www.artesyn.com/legal>.

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

For more information: www.Artesyn.com/power
For support: productsupport.ep@Artesyn.com

Issue API 01.25.2016